

Microcoded and VLIW Processors

Daniel Sanchez

Computer Science & Artificial Intelligence Lab
M.I.T.

Hardwired vs Microcoded Processors

- All processors we have seen so far are hardwired: The microarchitecture directly implements all the instructions in the ISA

Hardwired vs Microcoded Processors

- All processors we have seen so far are hardwired: The microarchitecture directly implements all the instructions in the ISA
- Microcoded processors add a layer of interpretation: Each ISA instruction is executed as a sequence of simpler *microinstructions*
 - *Simpler implementation*
 - *Lower performance than hardwired ($CPI > 1$)*


Hardwired vs Microcoded Processors

- All processors we have seen so far are hardwired: The microarchitecture directly implements all the instructions in the ISA
- Microcoded processors add a layer of interpretation: Each ISA instruction is executed as a sequence of simpler *microinstructions*
 - *Simpler implementation*
 - *Lower performance than hardwired ($CPI > 1$)*
- Microcoding common until the 80s, still in use today (e.g., complex x86 instructions are decoded into multiple “micro-ops”)


Microcontrol Unit

[Maurice Wilkes, 1954]


Embed the control logic state table in a read-only memory array

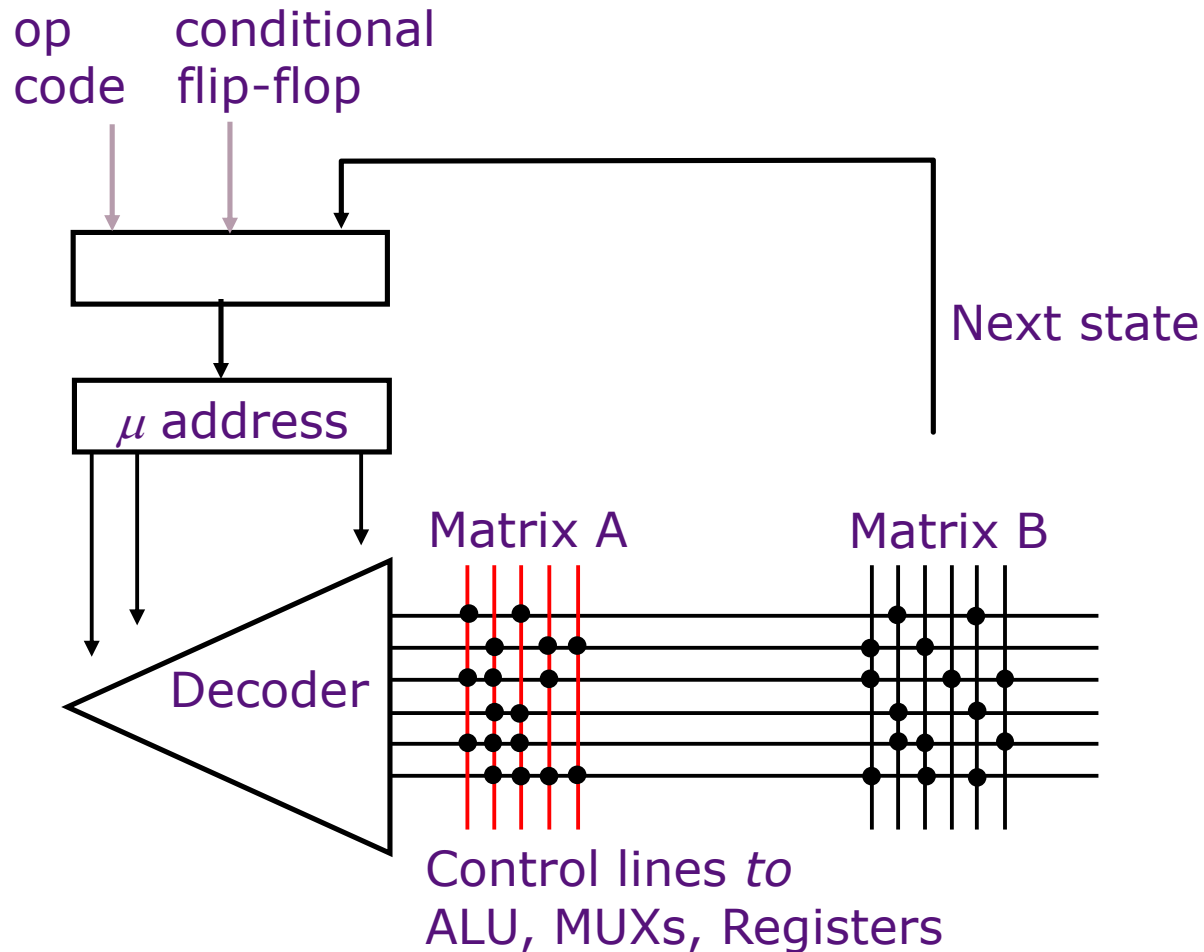


Microcoded Microarchitecture

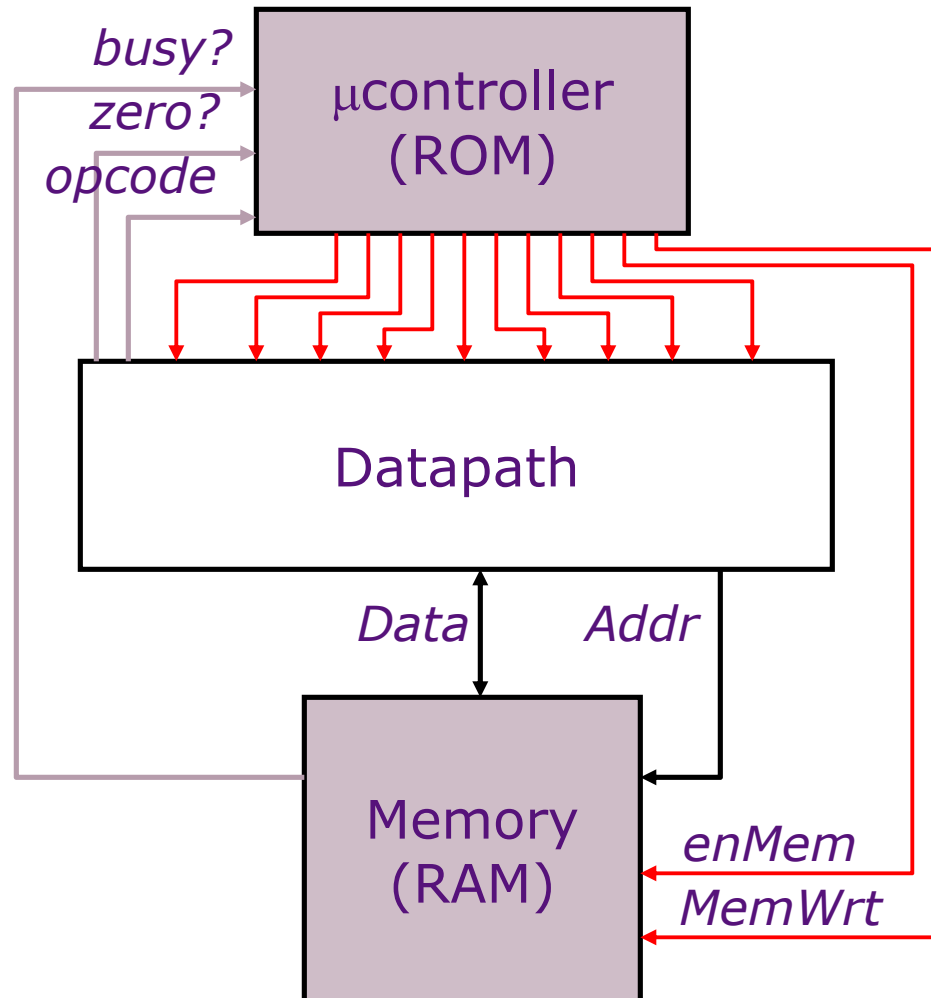


Microcoded Microarchitecture

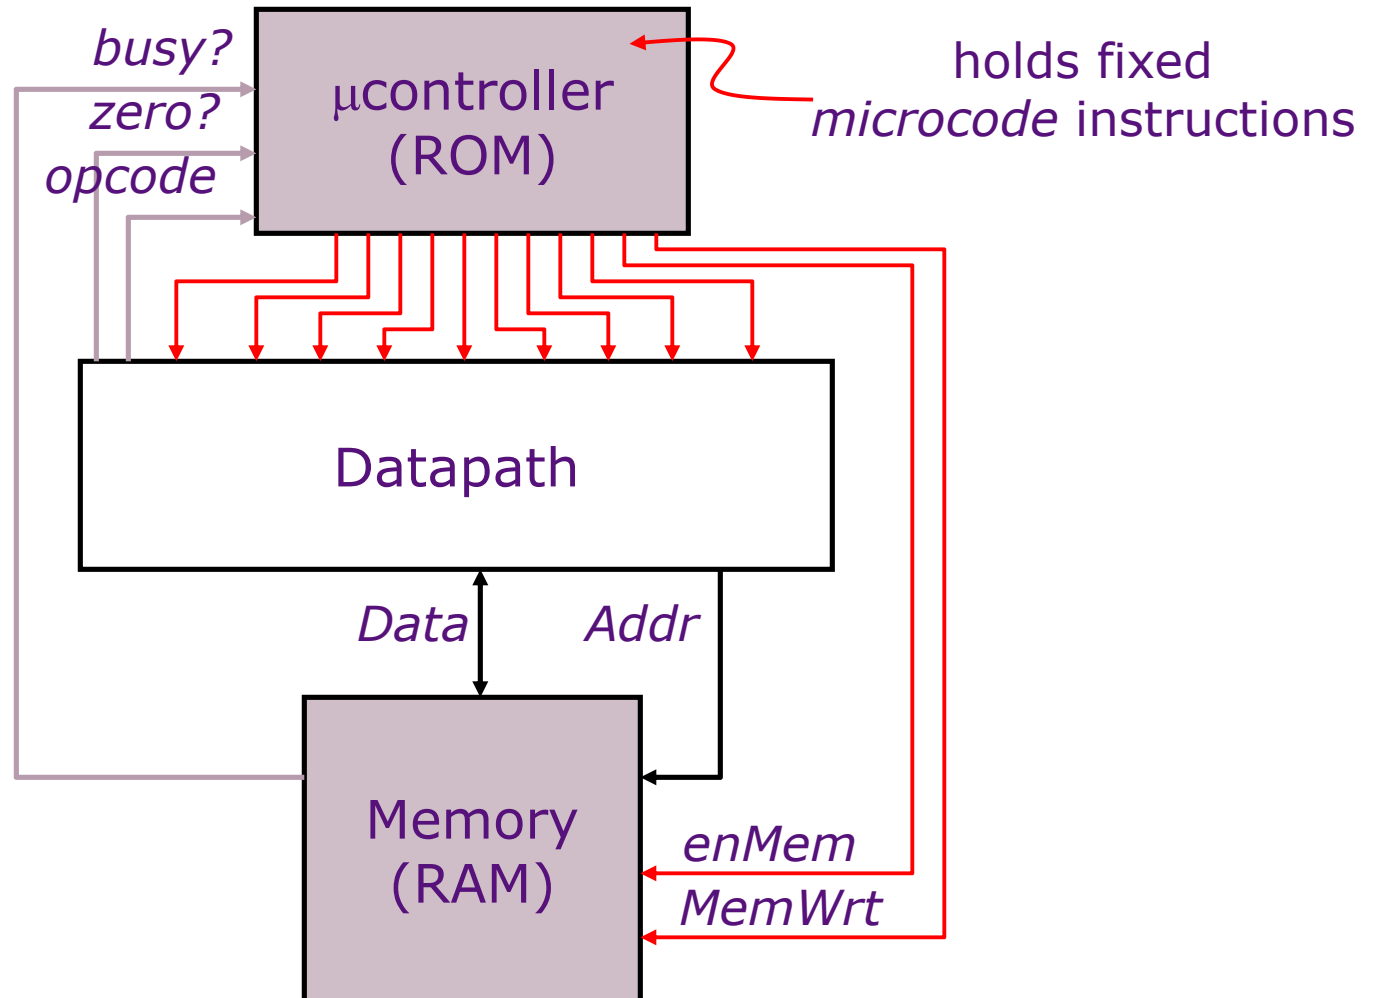


Microcoded Microarchitecture

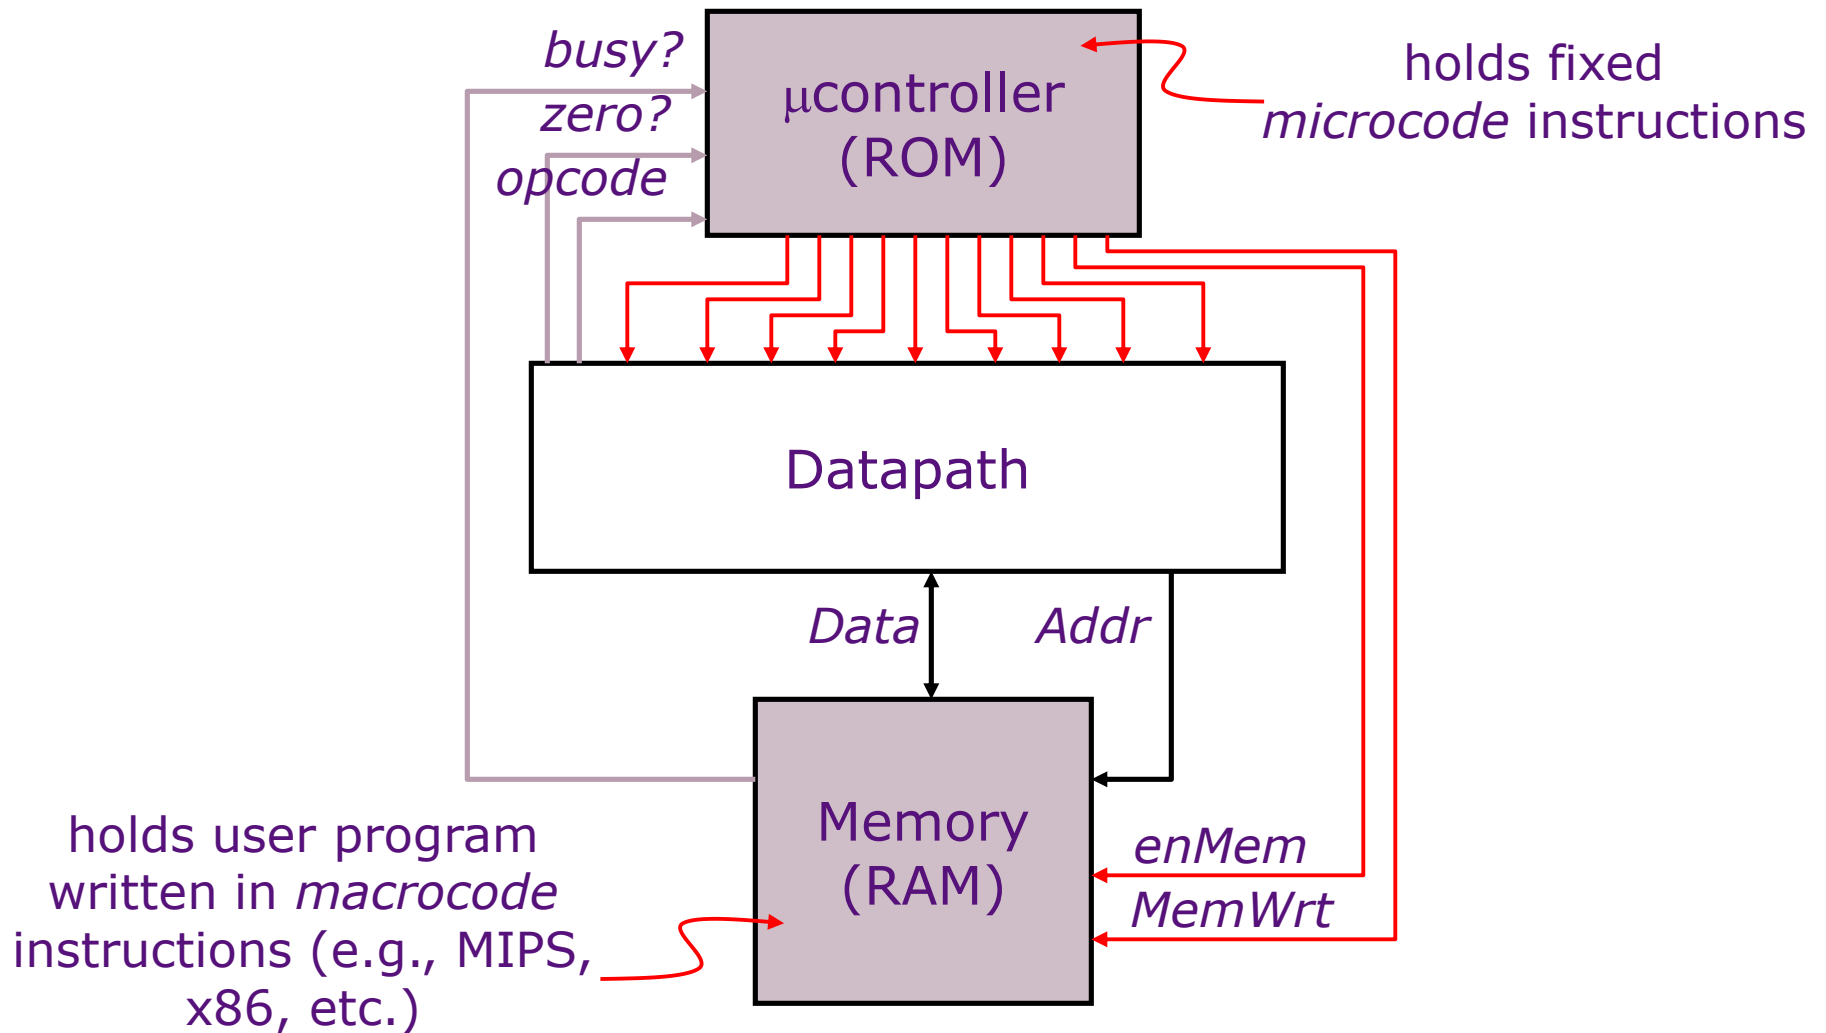


A Bus-based Datapath for MIPS

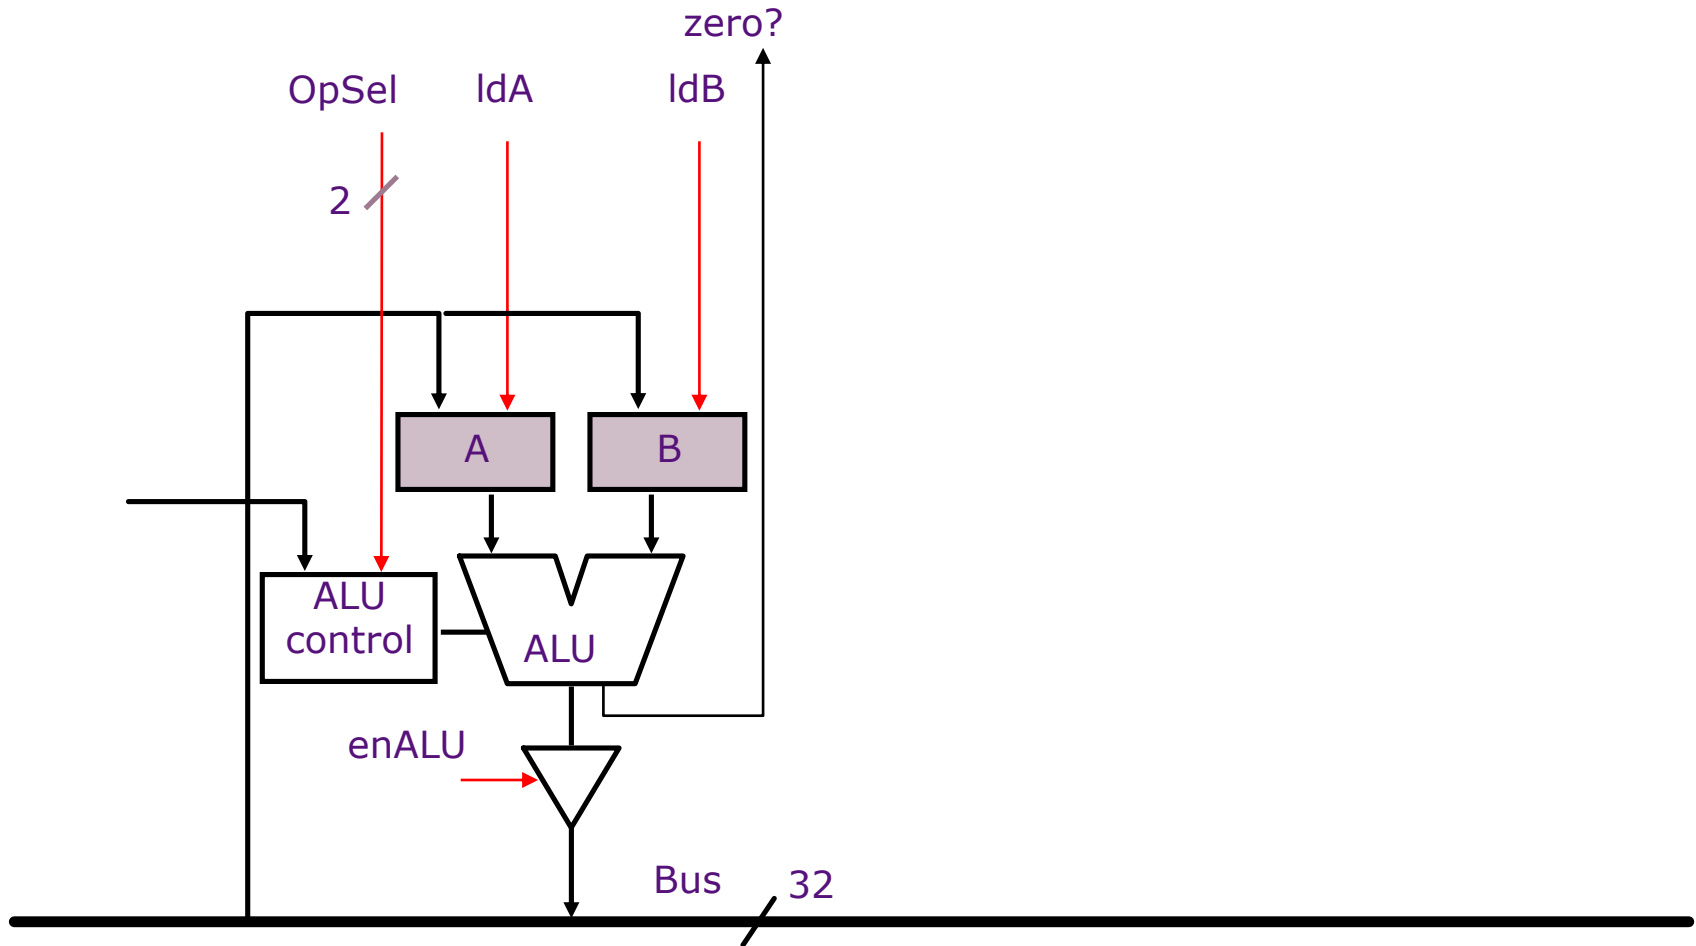


A Bus-based Datapath for MIPS

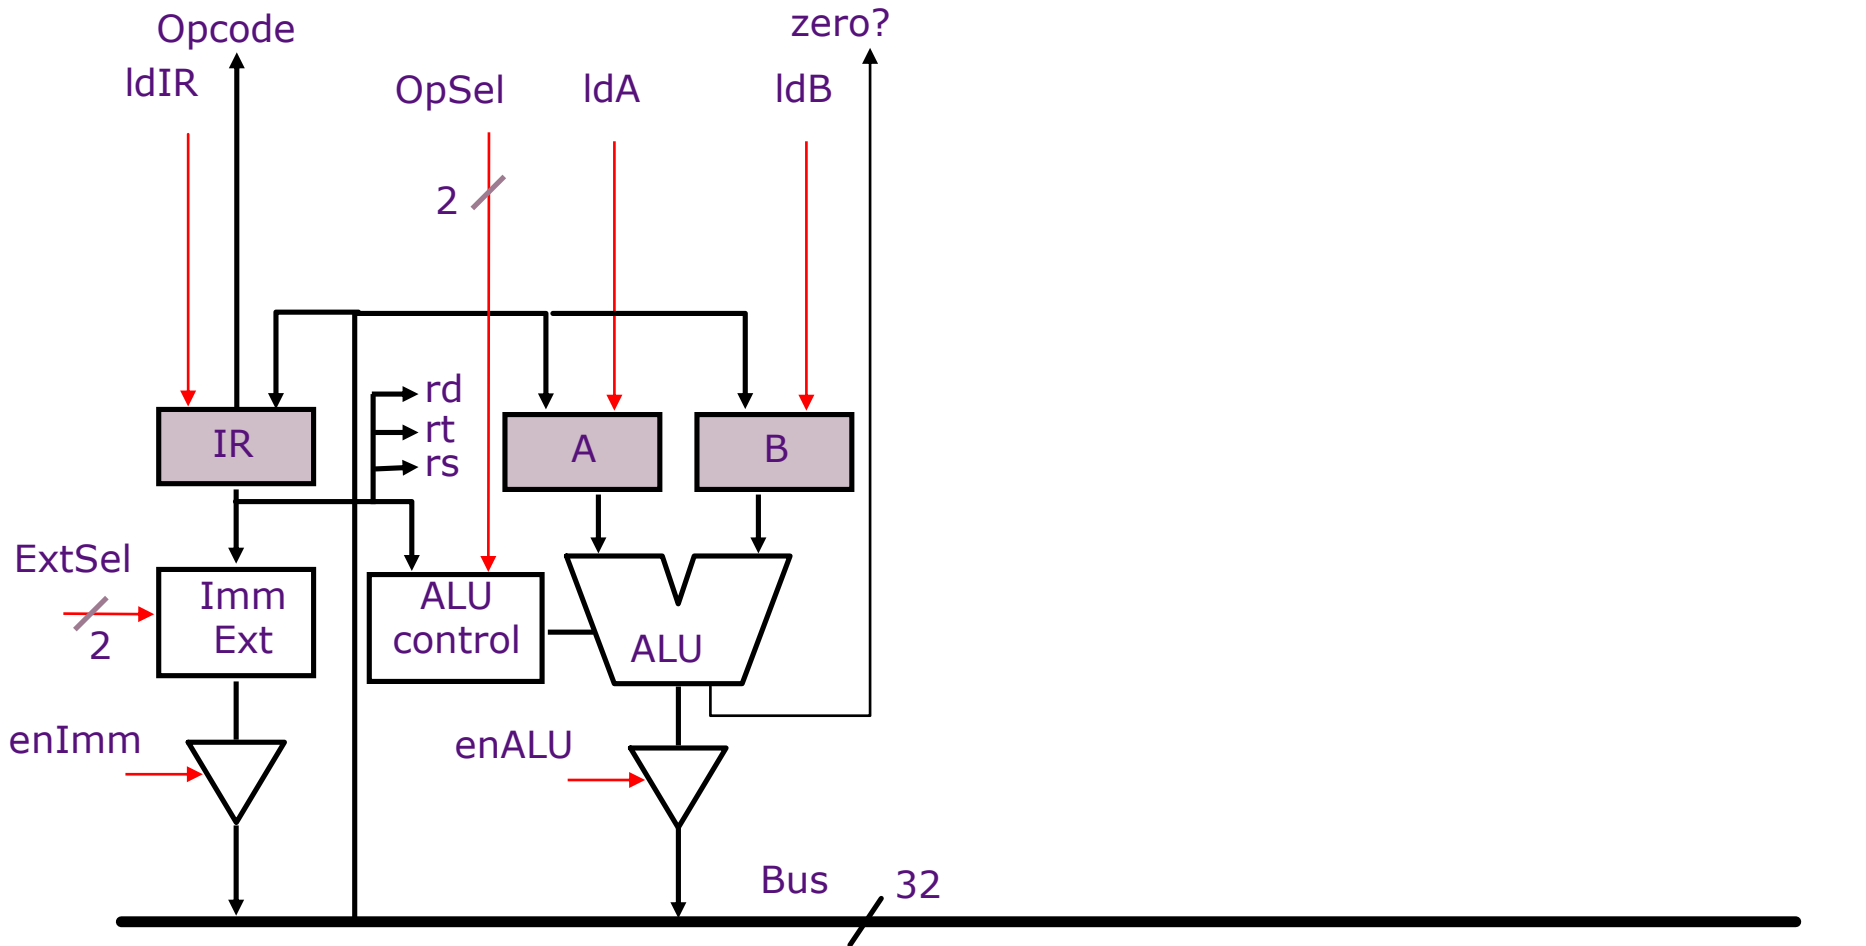


A Bus-based Datapath for MIPS

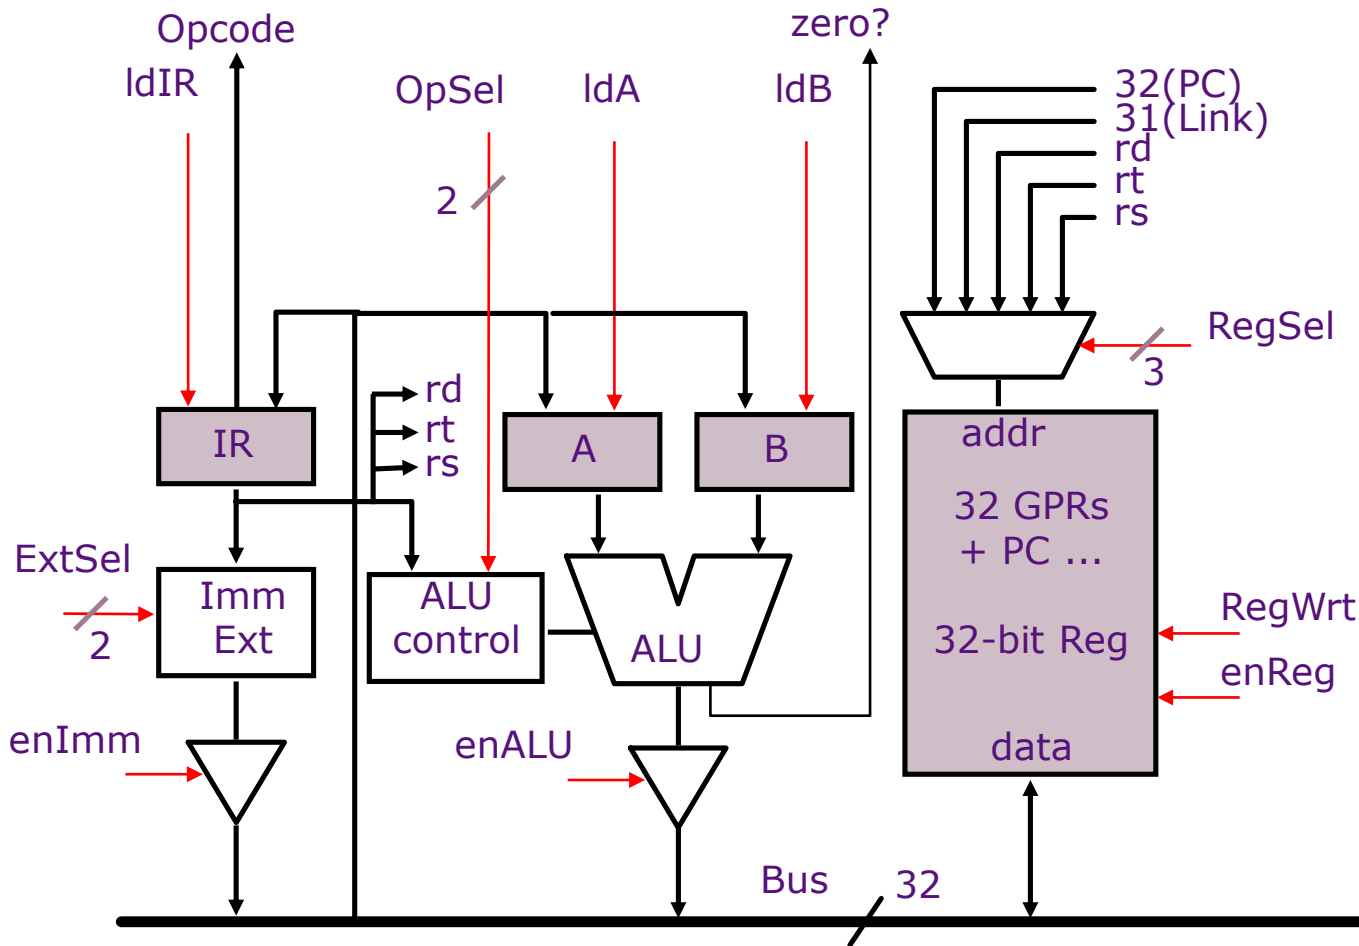

A Bus-based Datapath for MIPS

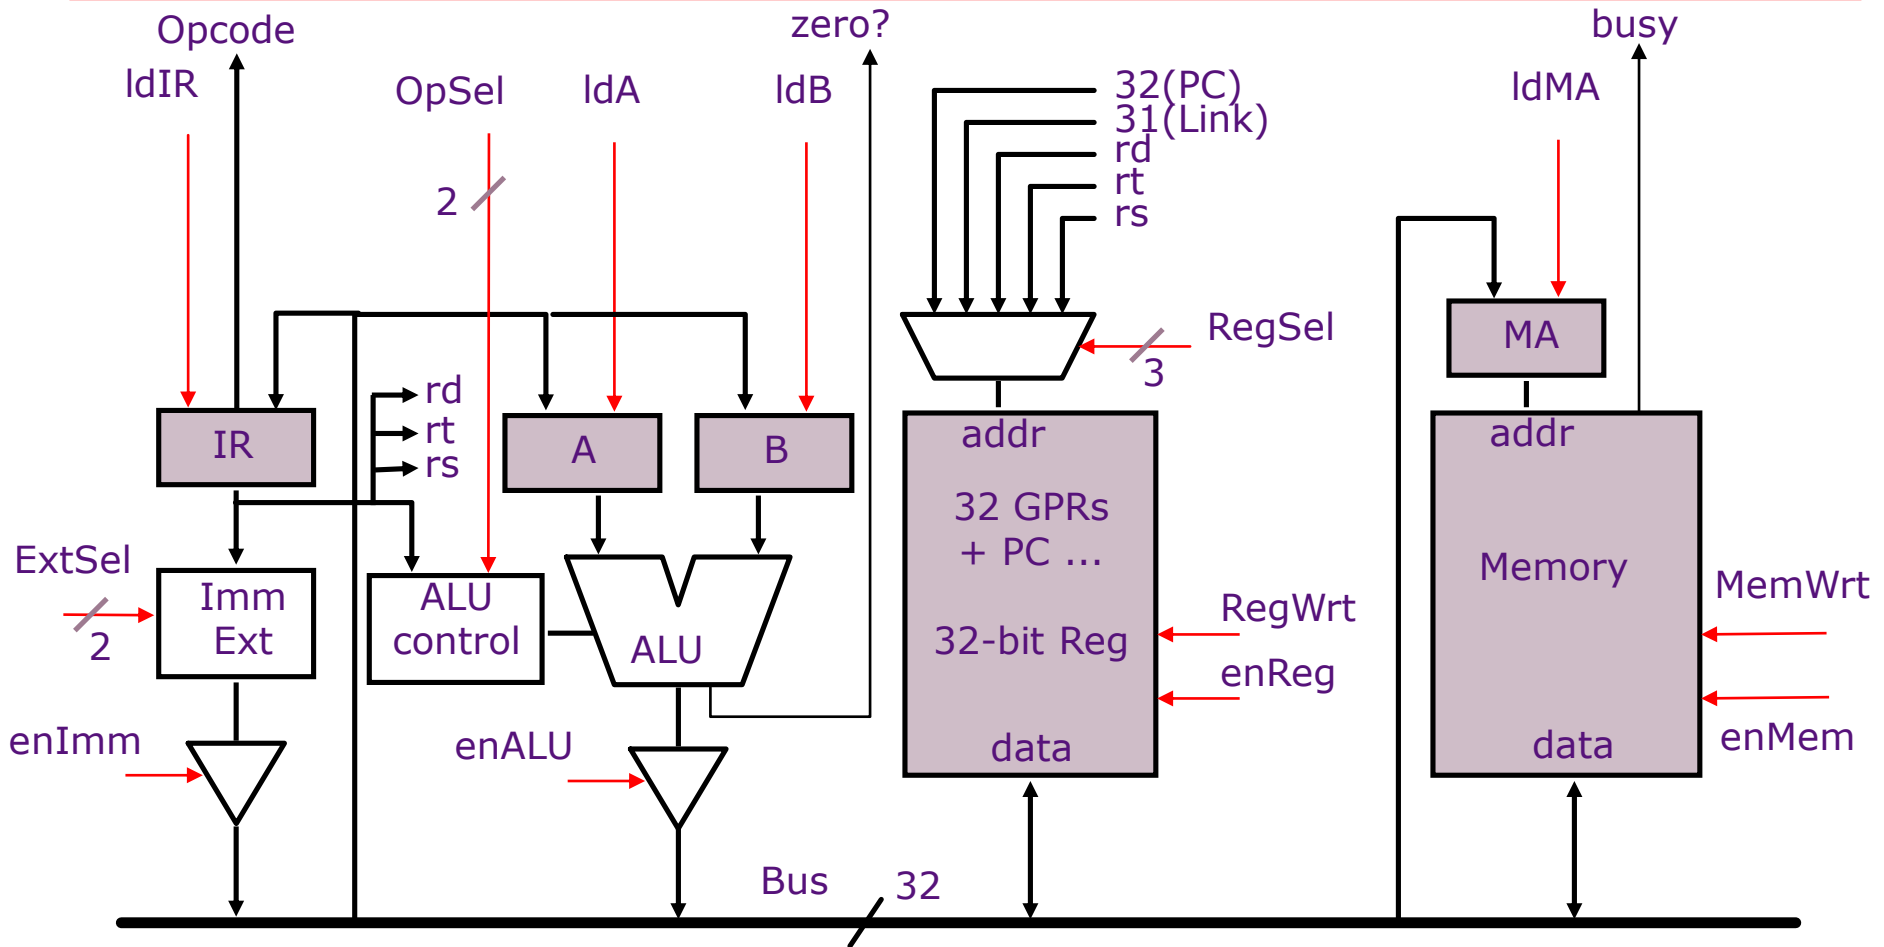


A Bus-based Datapath for MIPS

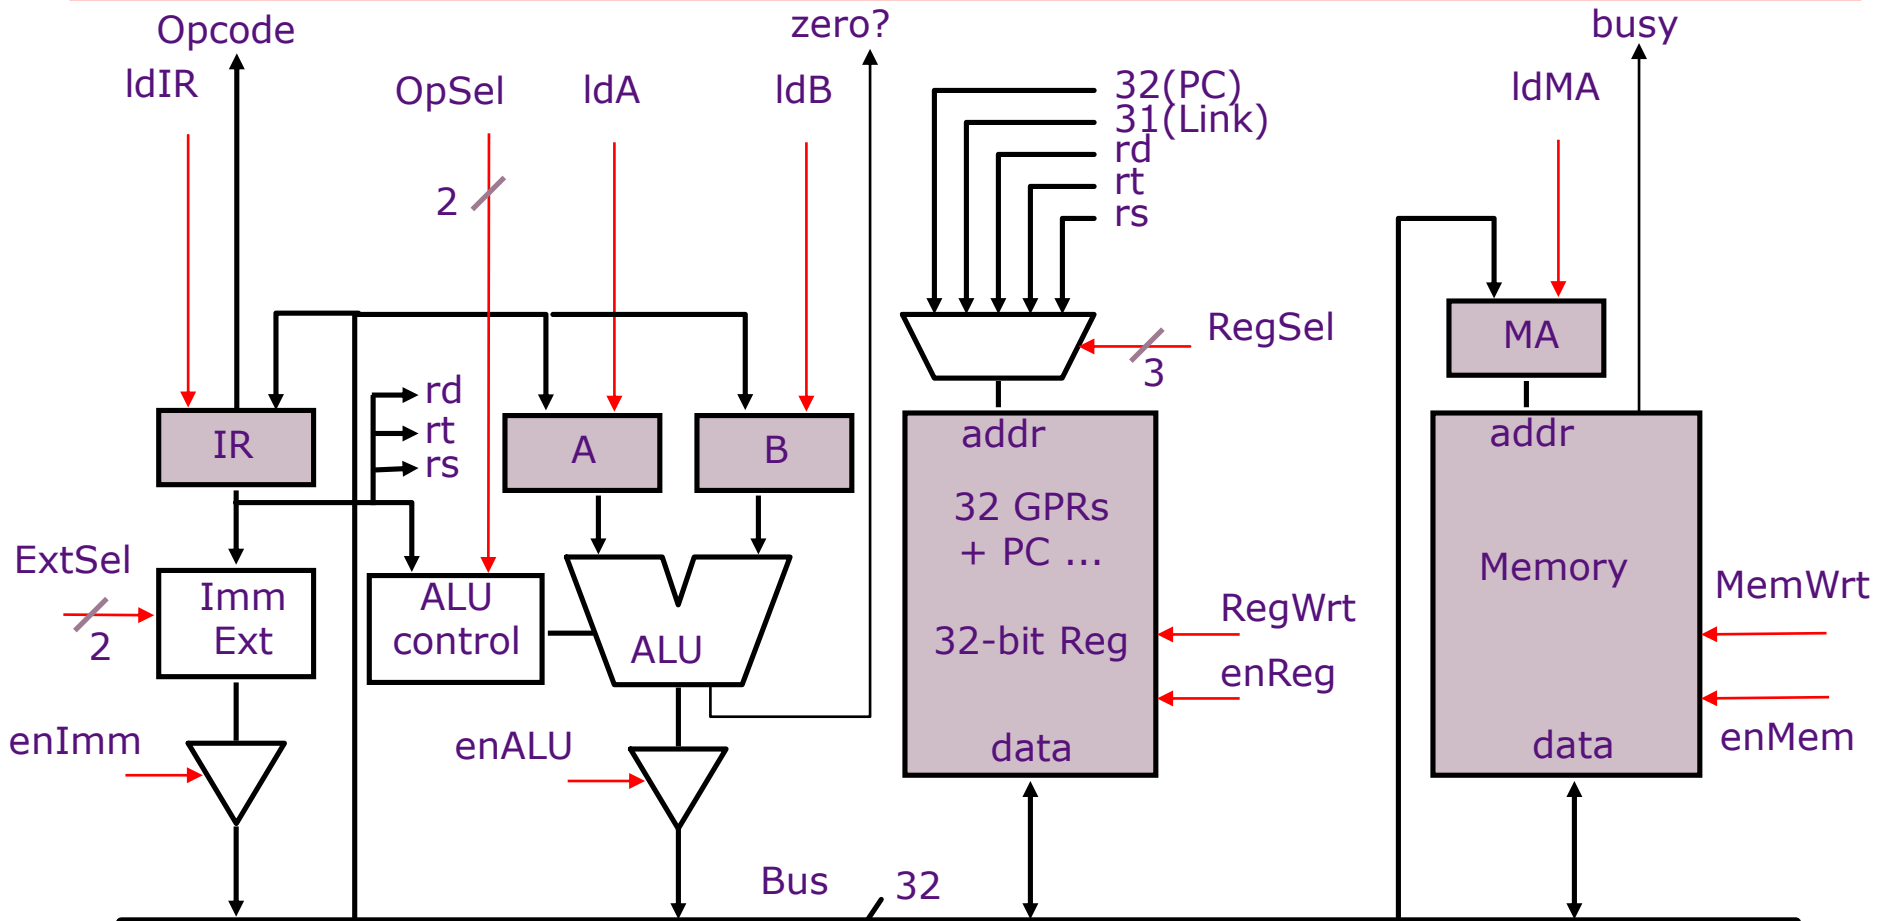

Microinstruction: register to register transfer (17 control signals)

MA ← PC means RegSel = PC; enReg=yes; IdMA= yes
 B ← Reg[rt] means


A Bus-based Datapath for MIPS

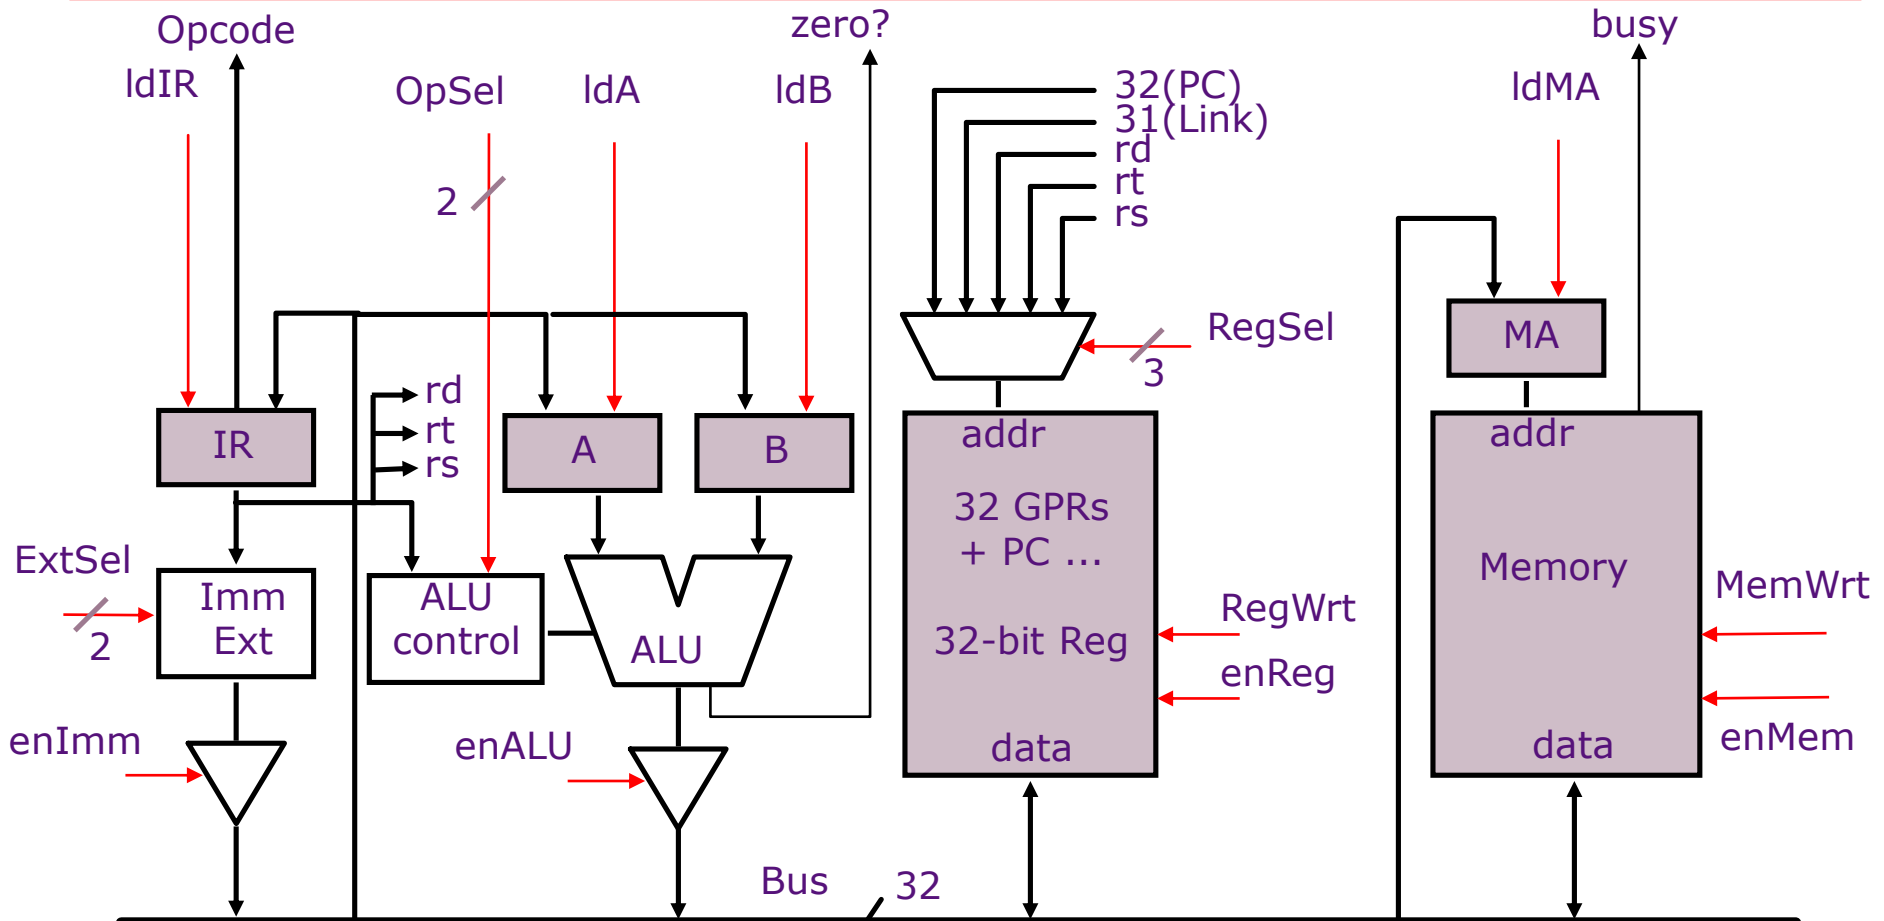

Microinstruction: register to register transfer (17 control signals)


MA $\leftarrow$ PC means RegSel = PC; enReg=yes; IdMA= yes
 B $\leftarrow$ Reg[rt] means RegSel = rt; enReg=yes; IdB = yes

Memory Module

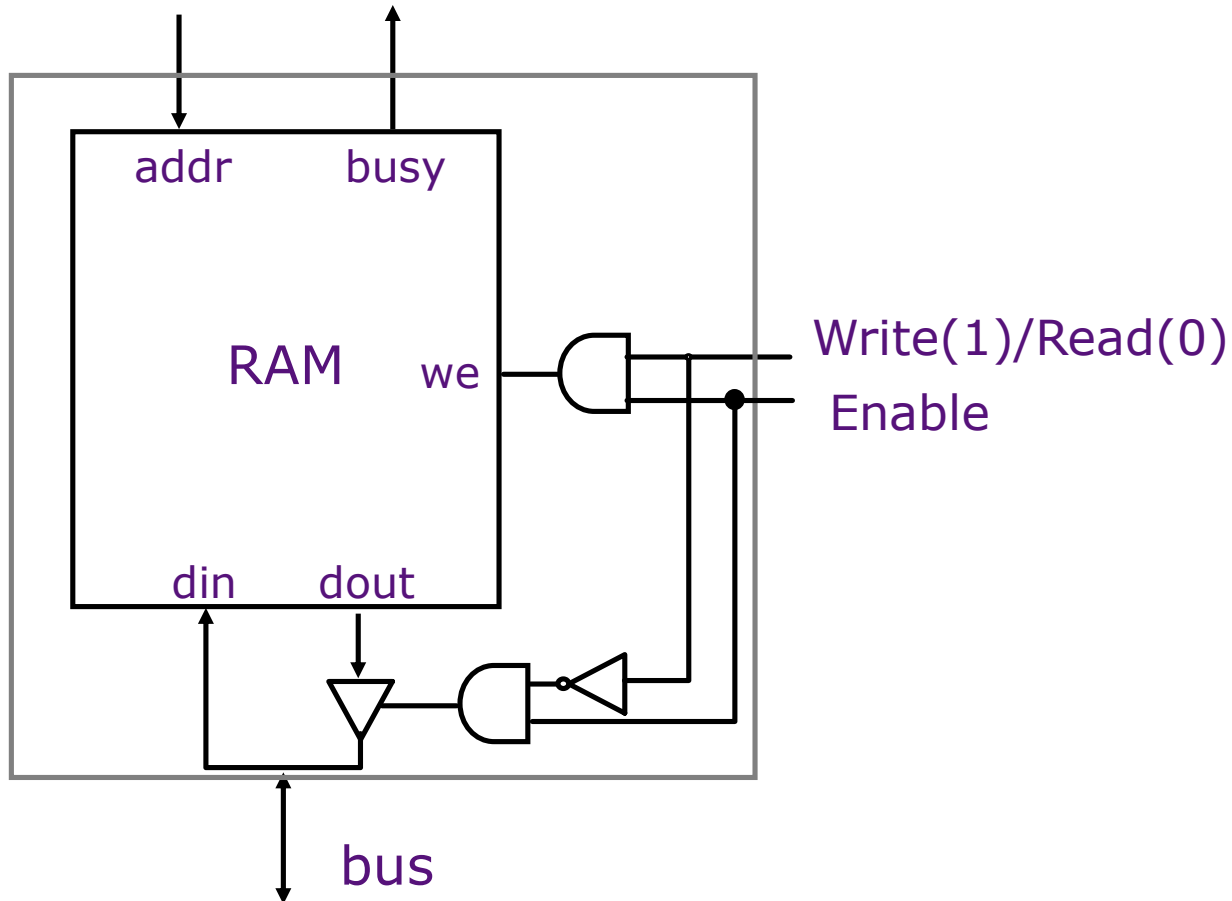


- Assumption: Memory operates asynchronously and is slow compared to Reg-to-Reg transfers


Microcode Controller

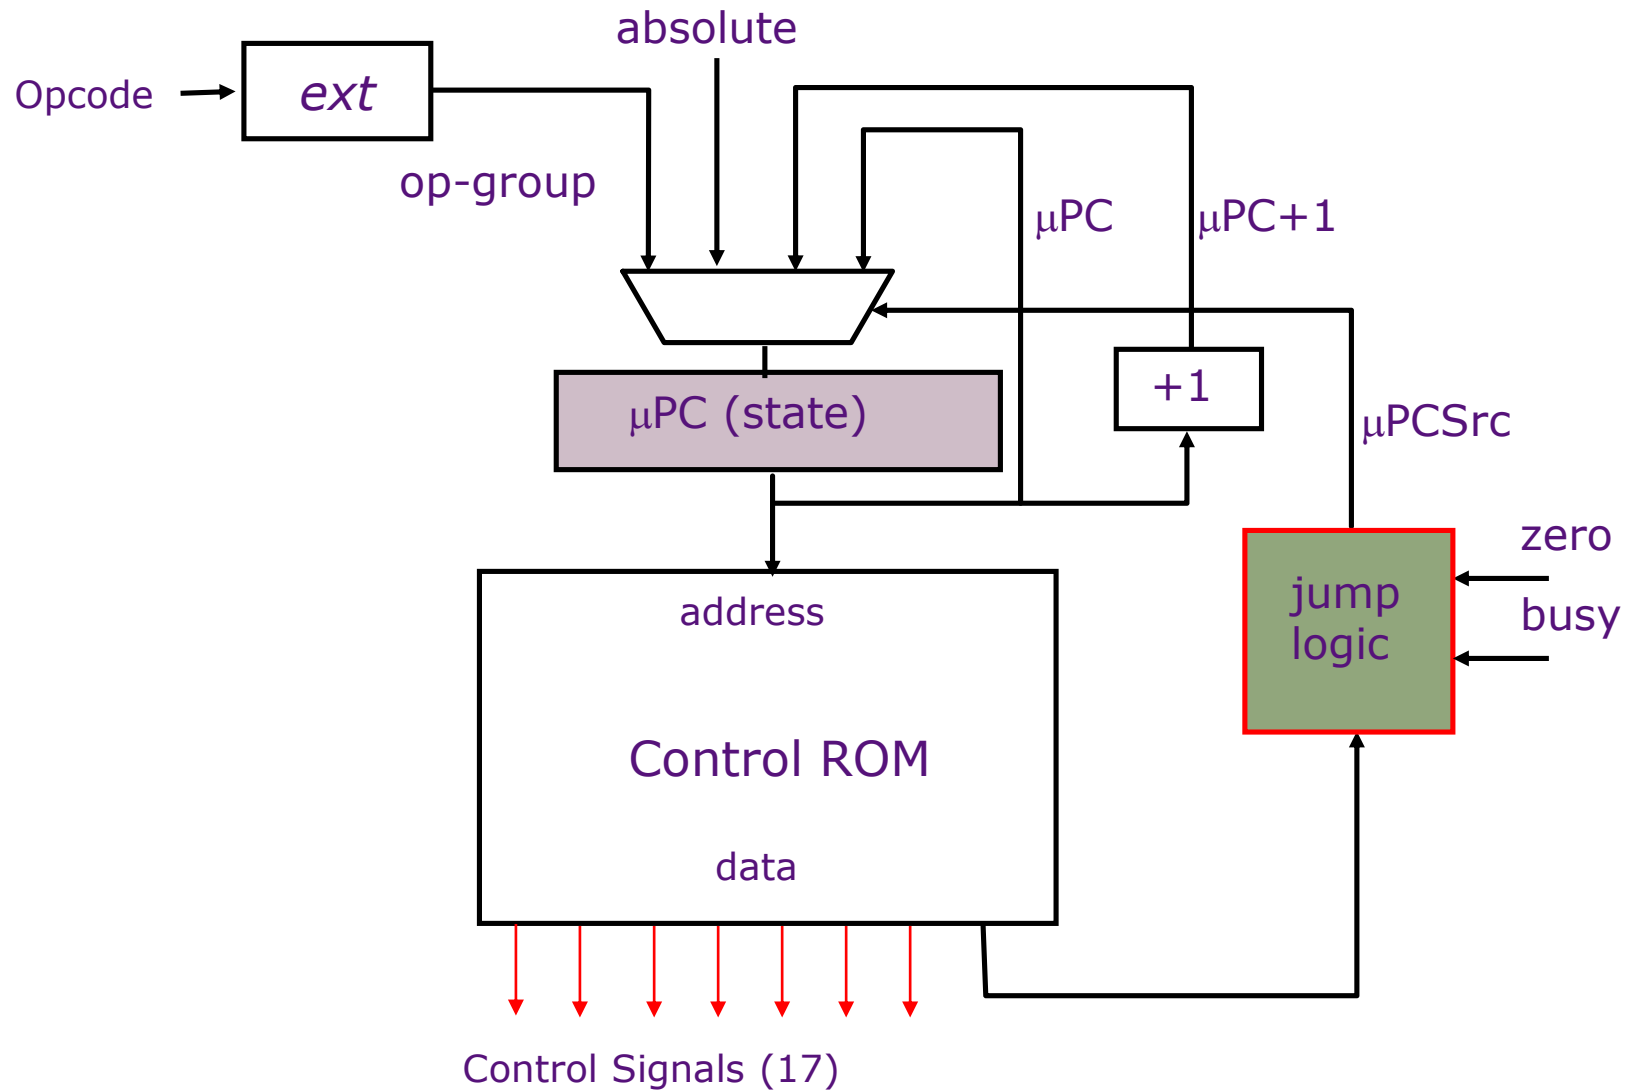


Microcode Controller

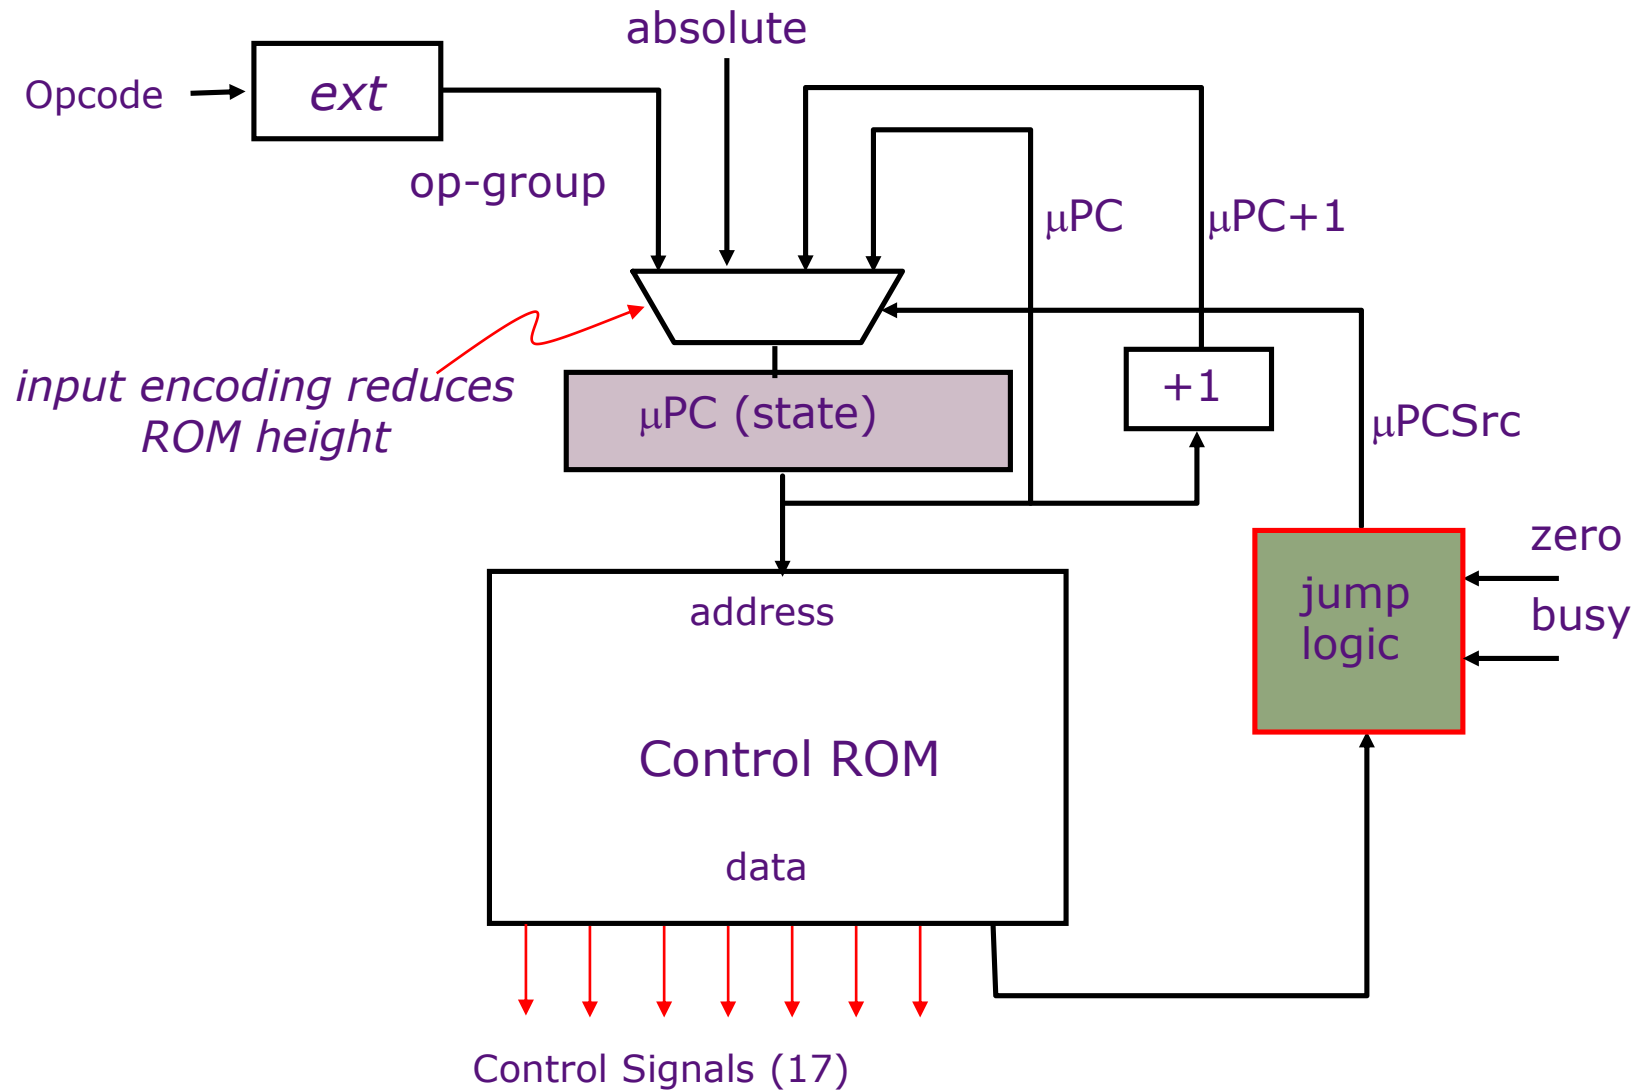

Microcode Controller

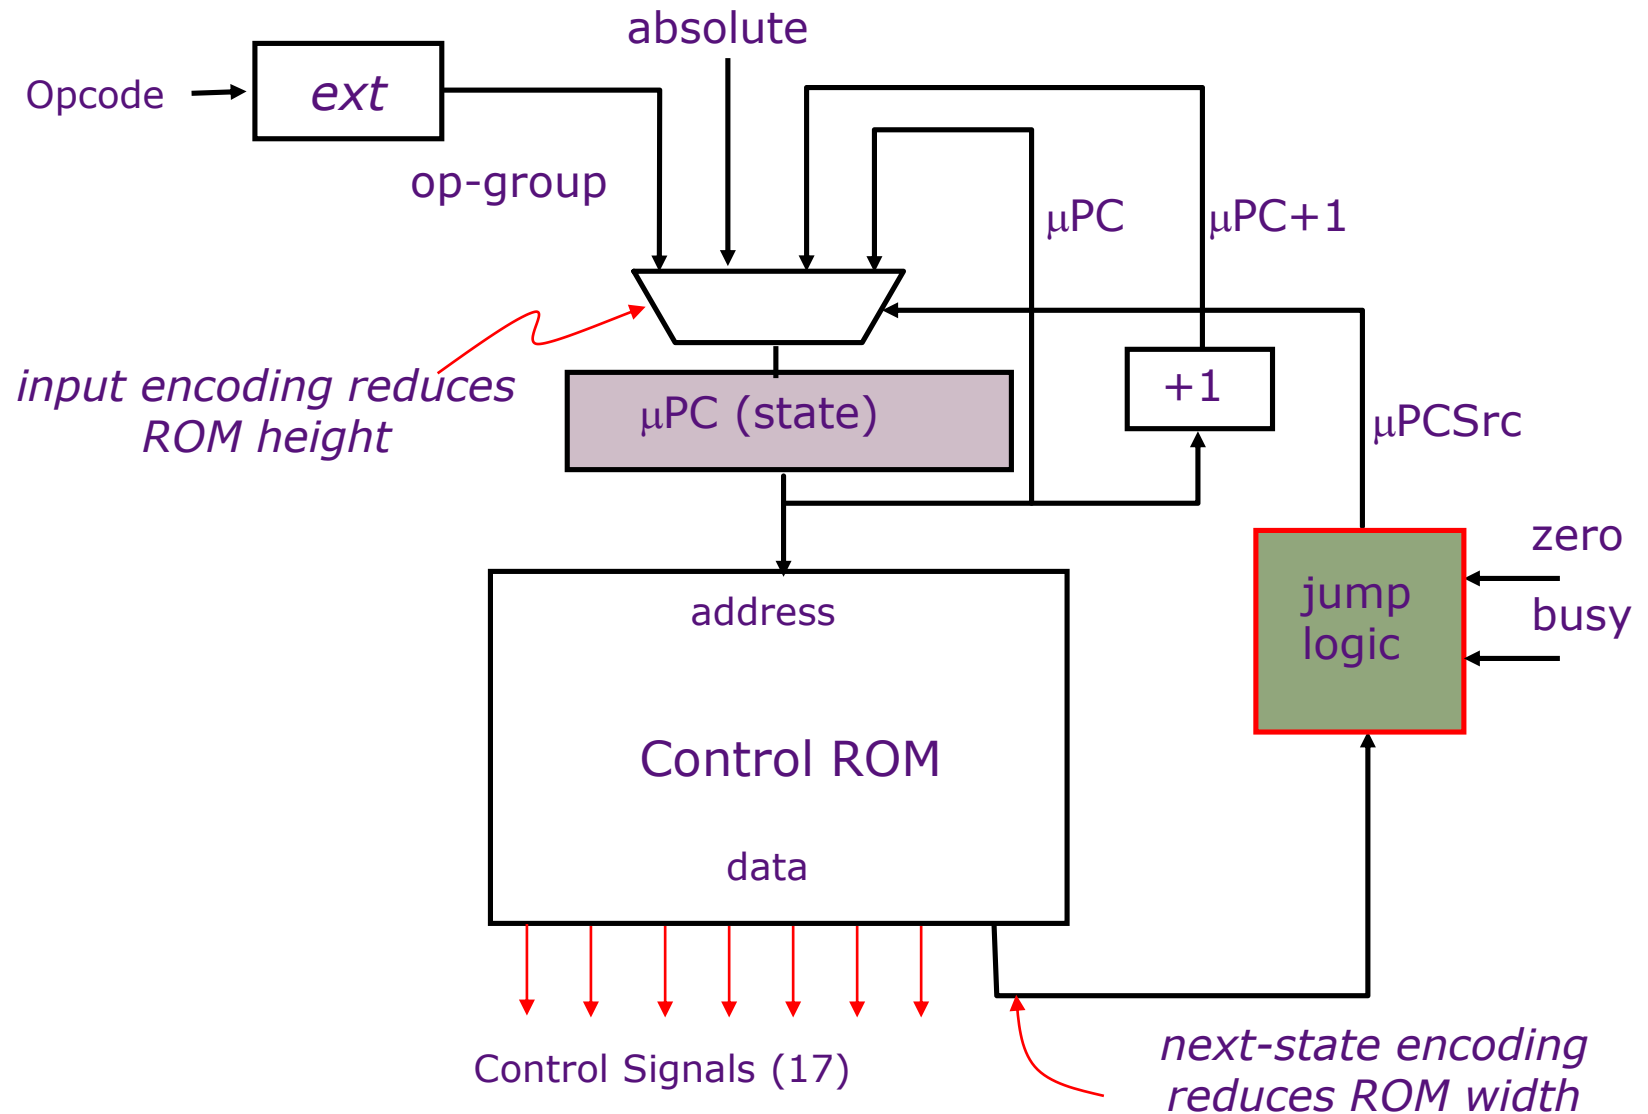

Microcode Controller

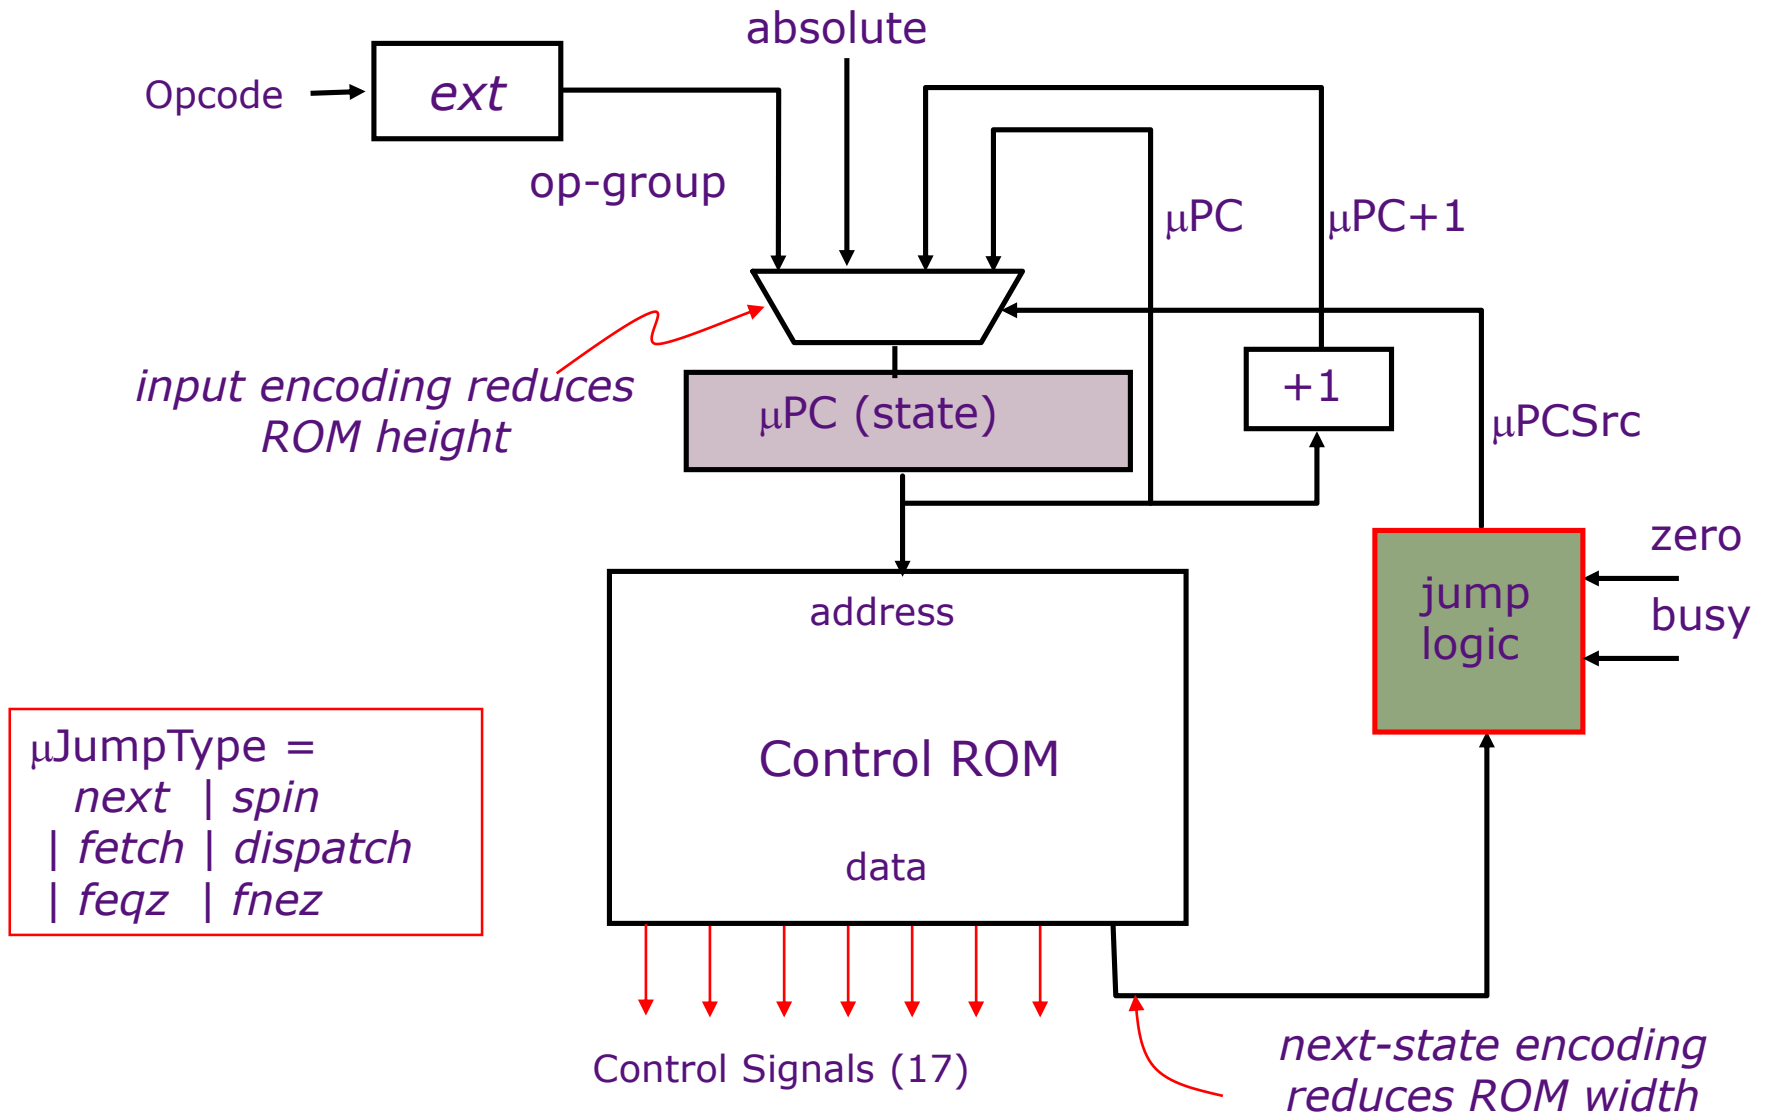

Jump Logic

$\mu\text{PCSrc} = \text{Case } \mu\text{JumpTypes}$

next $\Rightarrow$ $\mu\text{PC}+1$

spin $\Rightarrow$ if (busy) then μPC else $\mu\text{PC}+1$

fetch $\Rightarrow$ absolute

dispatch $\Rightarrow$ op-group

feqz $\Rightarrow$ if (zero) then absolute else $\mu\text{PC}+1$

fnez $\Rightarrow$ if (zero) then $\mu\text{PC}+1$ else absolute

Instruction Execution

Execution of a MIPS instruction involves

1. instruction fetch
2. decode and register fetch
3. ALU operation
4. memory operation (optional)
5. write back to register file (optional)
+ the computation of the
next instruction address

Instruction Fetch

State	Control points	next-state
fetch ₀	$MA \leftarrow PC$	
fetch ₁	$IR \leftarrow \text{Memory}$	
fetch ₂	$A \leftarrow PC$	
fetch ₃	$PC \leftarrow A + 4$	
...		
ALU ₀	$A \leftarrow \text{Reg}[rs]$	
ALU ₁	$B \leftarrow \text{Reg}[rt]$	
ALU ₂	$\text{Reg}[rd] \leftarrow \text{func}(A, B)$	
ALUi ₀	$A \leftarrow \text{Reg}[rs]$	
ALUi ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	
ALUi ₂	$\text{Reg}[rd] \leftarrow \text{Op}(A, B)$	

Instruction Fetch

State	Control points	next-state
fetch ₀	$MA \leftarrow PC$	next
fetch ₁	$IR \leftarrow \text{Memory}$	
fetch ₂	$A \leftarrow PC$	
fetch ₃	$PC \leftarrow A + 4$	
...		
ALU ₀	$A \leftarrow \text{Reg}[rs]$	
ALU ₁	$B \leftarrow \text{Reg}[rt]$	
ALU ₂	$\text{Reg}[rd] \leftarrow \text{func}(A, B)$	
ALUi ₀	$A \leftarrow \text{Reg}[rs]$	
ALUi ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	
ALUi ₂	$\text{Reg}[rd] \leftarrow \text{Op}(A, B)$	

Instruction Fetch

State	Control points	next-state
fetch ₀	$MA \leftarrow PC$	next spin
fetch ₁	$IR \leftarrow \text{Memory}$	
fetch ₂	$A \leftarrow PC$	
fetch ₃	$PC \leftarrow A + 4$	
...		
ALU ₀	$A \leftarrow \text{Reg}[rs]$	
ALU ₁	$B \leftarrow \text{Reg}[rt]$	
ALU ₂	$\text{Reg}[rd] \leftarrow \text{func}(A, B)$	
ALUi ₀	$A \leftarrow \text{Reg}[rs]$	
ALUi ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	
ALUi ₂	$\text{Reg}[rd] \leftarrow \text{Op}(A, B)$	

Instruction Fetch

State	Control points	next-state
fetch ₀	$MA \leftarrow PC$	next
fetch ₁	$IR \leftarrow \text{Memory}$	spin
fetch ₂	$A \leftarrow PC$	next
fetch ₃	$PC \leftarrow A + 4$	
...		
ALU ₀	$A \leftarrow \text{Reg}[rs]$	
ALU ₁	$B \leftarrow \text{Reg}[rt]$	
ALU ₂	$\text{Reg}[rd] \leftarrow \text{func}(A, B)$	
ALUi ₀	$A \leftarrow \text{Reg}[rs]$	
ALUi ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	
ALUi ₂	$\text{Reg}[rd] \leftarrow \text{Op}(A, B)$	

Instruction Fetch

State	Control points	next-state
fetch ₀	$MA \leftarrow PC$	next
fetch ₁	$IR \leftarrow \text{Memory}$	spin
fetch ₂	$A \leftarrow PC$	next
fetch ₃	$PC \leftarrow A + 4$	dispatch
...		
ALU ₀	$A \leftarrow \text{Reg}[\text{rs}]$	
ALU ₁	$B \leftarrow \text{Reg}[\text{rt}]$	
ALU ₂	$\text{Reg}[\text{rd}] \leftarrow \text{func}(A, B)$	
ALUi ₀	$A \leftarrow \text{Reg}[\text{rs}]$	
ALUi ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	
ALUi ₂	$\text{Reg}[\text{rd}] \leftarrow \text{Op}(A, B)$	

Instruction Fetch

State	Control points	next-state
fetch ₀	$MA \leftarrow PC$	next
fetch ₁	$IR \leftarrow \text{Memory}$	spin
fetch ₂	$A \leftarrow PC$	next
fetch ₃	$PC \leftarrow A + 4$	dispatch
...		
ALU ₀	$A \leftarrow \text{Reg}[\text{rs}]$	next
ALU ₁	$B \leftarrow \text{Reg}[\text{rt}]$	
ALU ₂	$\text{Reg}[\text{rd}] \leftarrow \text{func}(A, B)$	
ALUi ₀	$A \leftarrow \text{Reg}[\text{rs}]$	
ALUi ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	
ALUi ₂	$\text{Reg}[\text{rd}] \leftarrow \text{Op}(A, B)$	

Instruction Fetch

State	Control points	next-state
fetch ₀	$MA \leftarrow PC$	next
fetch ₁	$IR \leftarrow \text{Memory}$	spin
fetch ₂	$A \leftarrow PC$	next
fetch ₃	$PC \leftarrow A + 4$	dispatch
...		
ALU ₀	$A \leftarrow \text{Reg}[rs]$	next
ALU ₁	$B \leftarrow \text{Reg}[rt]$	next
ALU ₂	$\text{Reg}[rd] \leftarrow \text{func}(A, B)$	
ALUi ₀	$A \leftarrow \text{Reg}[rs]$	
ALUi ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	
ALUi ₂	$\text{Reg}[rd] \leftarrow \text{Op}(A, B)$	

Instruction Fetch

State	Control points	next-state
fetch ₀	$MA \leftarrow PC$	next
fetch ₁	$IR \leftarrow \text{Memory}$	spin
fetch ₂	$A \leftarrow PC$	next
fetch ₃	$PC \leftarrow A + 4$	dispatch
...		
ALU ₀	$A \leftarrow \text{Reg}[rs]$	next
ALU ₁	$B \leftarrow \text{Reg}[rt]$	next
ALU ₂	$\text{Reg}[rd] \leftarrow \text{func}(A, B)$	fetch
ALUi ₀	$A \leftarrow \text{Reg}[rs]$	
ALUi ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	
ALUi ₂	$\text{Reg}[rd] \leftarrow \text{Op}(A, B)$	

Instruction Fetch

State	Control points	next-state
fetch ₀	$MA \leftarrow PC$	next
fetch ₁	$IR \leftarrow \text{Memory}$	spin
fetch ₂	$A \leftarrow PC$	next
fetch ₃	$PC \leftarrow A + 4$	dispatch
...		
ALU ₀	$A \leftarrow \text{Reg}[rs]$	next
ALU ₁	$B \leftarrow \text{Reg}[rt]$	next
ALU ₂	$\text{Reg}[rd] \leftarrow \text{func}(A, B)$	fetch
ALUi ₀	$A \leftarrow \text{Reg}[rs]$	next
ALUi ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	next
ALUi ₂	$\text{Reg}[rd] \leftarrow \text{Op}(A, B)$	fetch

Load & Store

State	Control points	next-state
LW ₀	$A \leftarrow \text{Reg}[\text{rs}]$	next
LW ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	next
LW ₂	$\text{MA} \leftarrow A+B$	next
LW ₃	$\text{Reg}[\text{rt}] \leftarrow \text{Memory}$	spin
LW ₄		fetch
SW ₀	$A \leftarrow \text{Reg}[\text{rs}]$	next
SW ₁	$B \leftarrow \text{sExt}_{16}(\text{Imm})$	next
SW ₂	$\text{MA} \leftarrow A+B$	next
SW ₃	$\text{Memory} \leftarrow \text{Reg}[\text{rt}]$	spin
SW ₄		fetch

Branches

State	Control points	next-state
BEQZ ₀	$A \leftarrow \text{Reg}[\text{rs}]$	next
BEQZ ₁		fnez
BEQZ ₂	$A \leftarrow \text{PC}$	next
BEQZ ₃	$B \leftarrow \text{sExt}_{16}(\text{Imm} \ll 2)$	next
BEQZ ₄	$\text{PC} \leftarrow A+B$	fetch
BNEZ ₀	$A \leftarrow \text{Reg}[\text{rs}]$	next
BNEZ ₁		feqz
BNEZ ₂	$A \leftarrow \text{PC}$	next
BNEZ ₃	$B \leftarrow \text{sExt}_{16}(\text{Imm} \ll 2)$	next
BNEZ ₄	$\text{PC} \leftarrow A+B$	fetch

Jumps

State	Control points	next-state
J_0	$A \leftarrow PC$	next
J_1	$B \leftarrow IR$	next
J_2	$PC \leftarrow \text{JumpTarg}(A,B)$	fetch
JR_0	$A \leftarrow \text{Reg}[rs]$	next
JR_1	$PC \leftarrow A$	fetch
JAL_0	$A \leftarrow PC$	next
JAL_1	$\text{Reg}[31] \leftarrow A$	next
JAL_2	$B \leftarrow IR$	next
JAL_3	$PC \leftarrow \text{JumpTarg}(A,B)$	fetch
$JALR_0$	$A \leftarrow PC$	next
$JALR_1$	$B \leftarrow \text{Reg}[rs]$	next
$JALR_2$	$\text{Reg}[31] \leftarrow A$	next
$JALR_3$	$PC \leftarrow B$	fetch

VAX 11-780 Microcode (1978)

```

●  P1WFUD,1 [600,1205] MICRO2 1F(12) 26-May-81 14:58:1 VAX11/780 Microcode : PCS 01, FPLA 0D, WCS122 Page 771
●  CALL2 ,MIC [600,1205] Procedure call : CALLG, CALLS

●                                     ;29744 ;HERE FOR CALLG OR CALLS, AFTER PROBING THE EXTENT OF THE STACK
●                                     ;29745
●                                     ;29746 =0 ;-----;CALL SITE FOR MPUSH
● 6557K 0 U 11F4, 0811,2035,0180,F910,0000,0CD8 ;29747 CALL,7: D_Q,AND,RC[T2], ;STRIP MASK TO BITS 11-0
●                                     ;29748 CALL,J/MPUSH ;PUSH REGISTERS
●                                     ;29749
●                                     ;29750 ;-----;RETURN FROM MPUSH
● 6557K 7763K U 11F5, 0000,003C,0180,3270,0000,134A ;29751 CACHE_D[LONG], ;PUSH PC
●                                     ;29752 LAB_R[SP] ; BY SP
●                                     ;29753
● 6856K 0 U 134A, 0018,0000,0180,FAF0,0200,134C ;29754 ;-----;
●                                     ;29755 CALL,8: R[SP]&VA_LA=K[,8] ;UPDATE SP FOR PUSH OF PC &
●                                     ;29756
● 6856K 0 U 134C, 0800,003C,0180,FA68,0000,11F8 ;29757 ;-----;
●                                     ;29758 D_R[FP] ;READY TO PUSH FRAME POINTER
●                                     ;29759
●                                     ;29760 =0 ;-----;CALL SITE FOR PSHSP
●                                     ;29761 CACHE_D[LONG], ;STORE FP,
●                                     ;29762 LAB_R[SP], ; GET SP AGAIN
● 6856K 21M U 11F8, 0000,003D,6D80,3270,0084,6CD9 ;29763 SC_K[.FFF0], ;=16 TO SC
●                                     ;29764 CALL,J/PSHSP
●                                     ;29765
●                                     ;29766 ;-----;
● 6856K 0 U 11F9, 0800,003C,3DF0,2E60,0000,134D ;29767 D_R[AP], ;READY TO PUSH AP
●                                     ;29768 Q_ID[PSL] ; AND GET PSW FOR COMBINATIO
●                                     ;29769
●                                     ;29770 ;-----;
● 6856K 21M U 134D, 0019,2024,8DC0,3270,0000,134E ;29771 CACHE_D[LONG], ;STORE OLD AP
●                                     ;29772 Q_Q,ANDNOT,K[,1F], ;CLEAR PSW<T,N,Z,V,C>
●                                     ;29773 LAB_R[SP] ;GET SP INTO LATCHES AGAIN
●                                     ;29774
● 6856K 0 U 134E, 2010,0038,0180,F909,4200,1350 ;29775 ;-----;
●                                     ;29776 PC&VA_RC[T1], FLUSH,IB ; LOAD NEW PC AND CLEAR OUT
●                                     ;29777
●                                     ;29778 ;-----;
●                                     ;29779 D_DAL.SC, ;PSW TO D<31:16>
●                                     ;29780 Q_RC[T2], ;RECOVER MASK
● 6856K 0 U 1350, 0D10,0038,0DC0,6114,0084,9351 ;29781 SC=SC+K[,3], ;PUT -13 IN SC
●                                     ;29782 LOAD,IB, PC_PC+1 ;START FETCHING SUBROUTINE I
●                                     ;29783
●                                     ;29784 ;-----;
●                                     ;29785 D_DAL.SC, ;MASK AND PSW IN D<31:03>
● 6856K 0 U 1351, 0D10,0038,F5C0,F920,0084,9352 ;29786 Q_PC[T4], ;GET LOW BITS OF OLD SP TO Q<1:0>
●                                     ;29787 SC=SC+K[,A] ;PUT -3 IN SC
●                                     ;29788



```

Very Long Instruction Word (VLIW) Processors

Sequential ISA Bottleneck

*Sequential
source code*


```
a = foo(b);  
for (i=0, i<
```

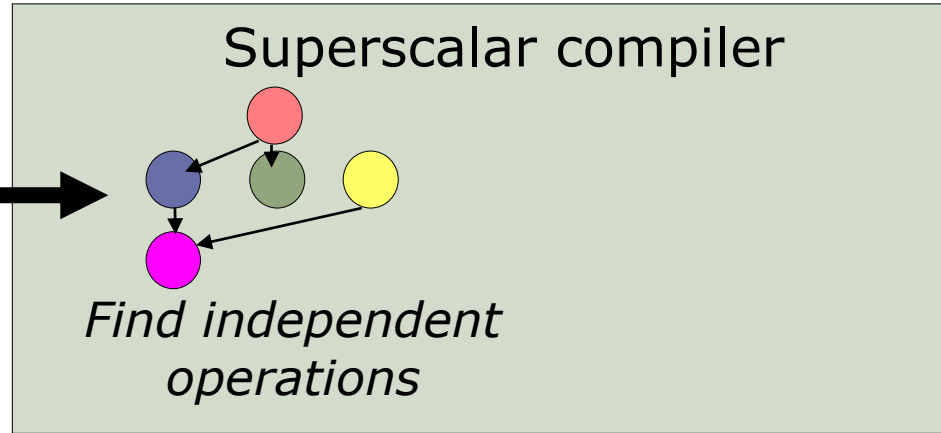


Sequential ISA Bottleneck

*Sequential
source code*


```
a = foo(b);  
for (i=0, i<
```

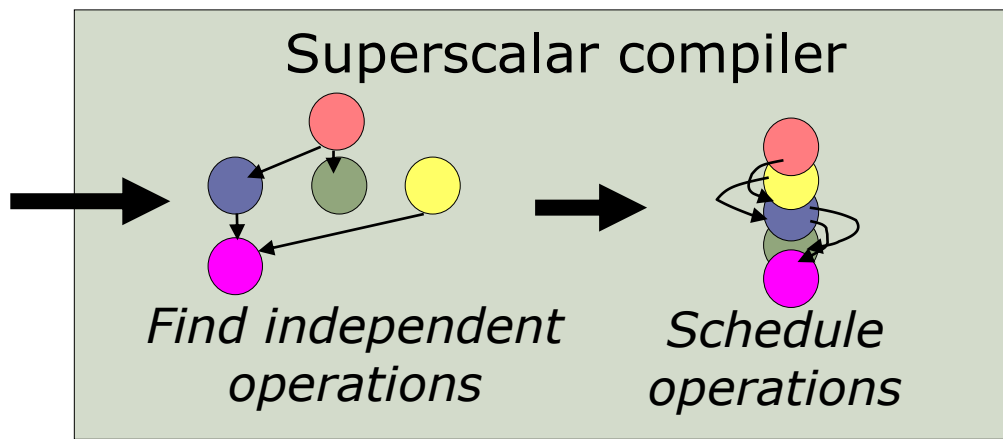


Sequential ISA Bottleneck

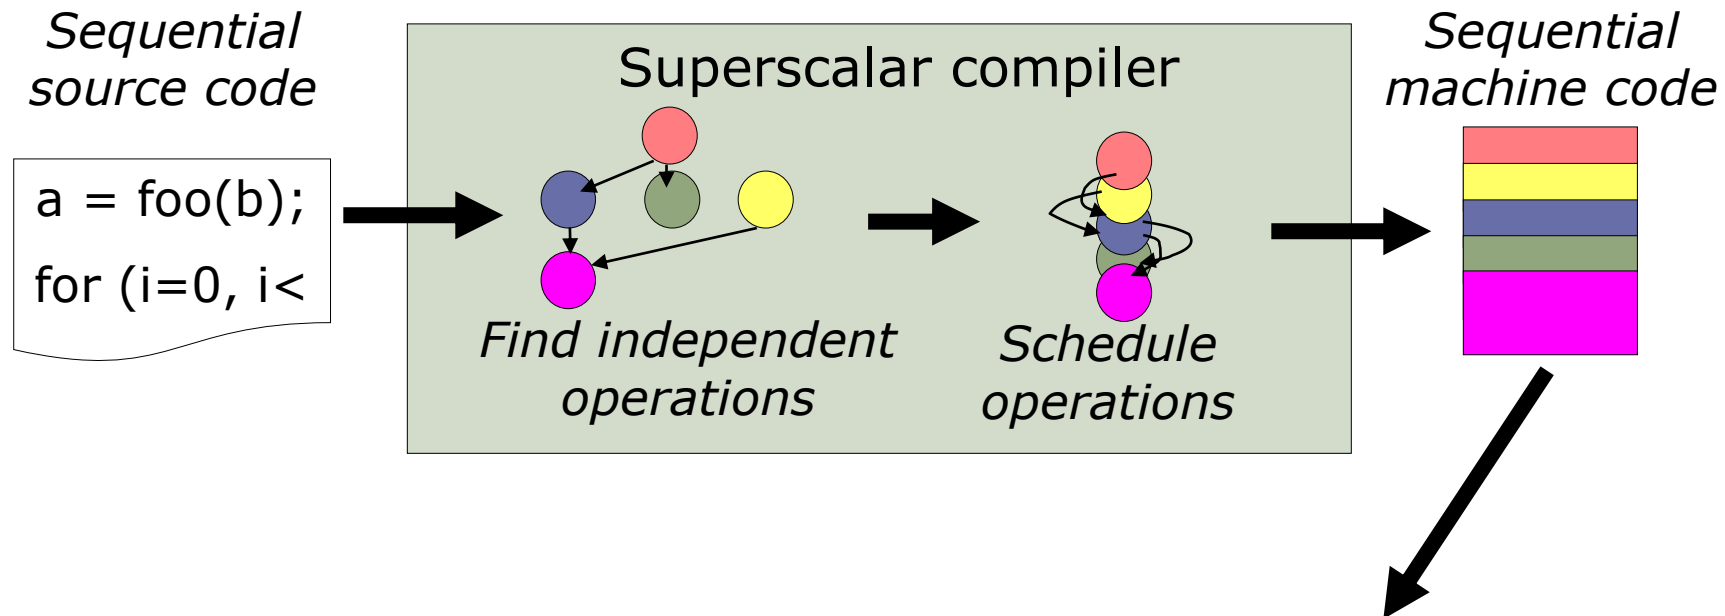


Sequential ISA Bottleneck

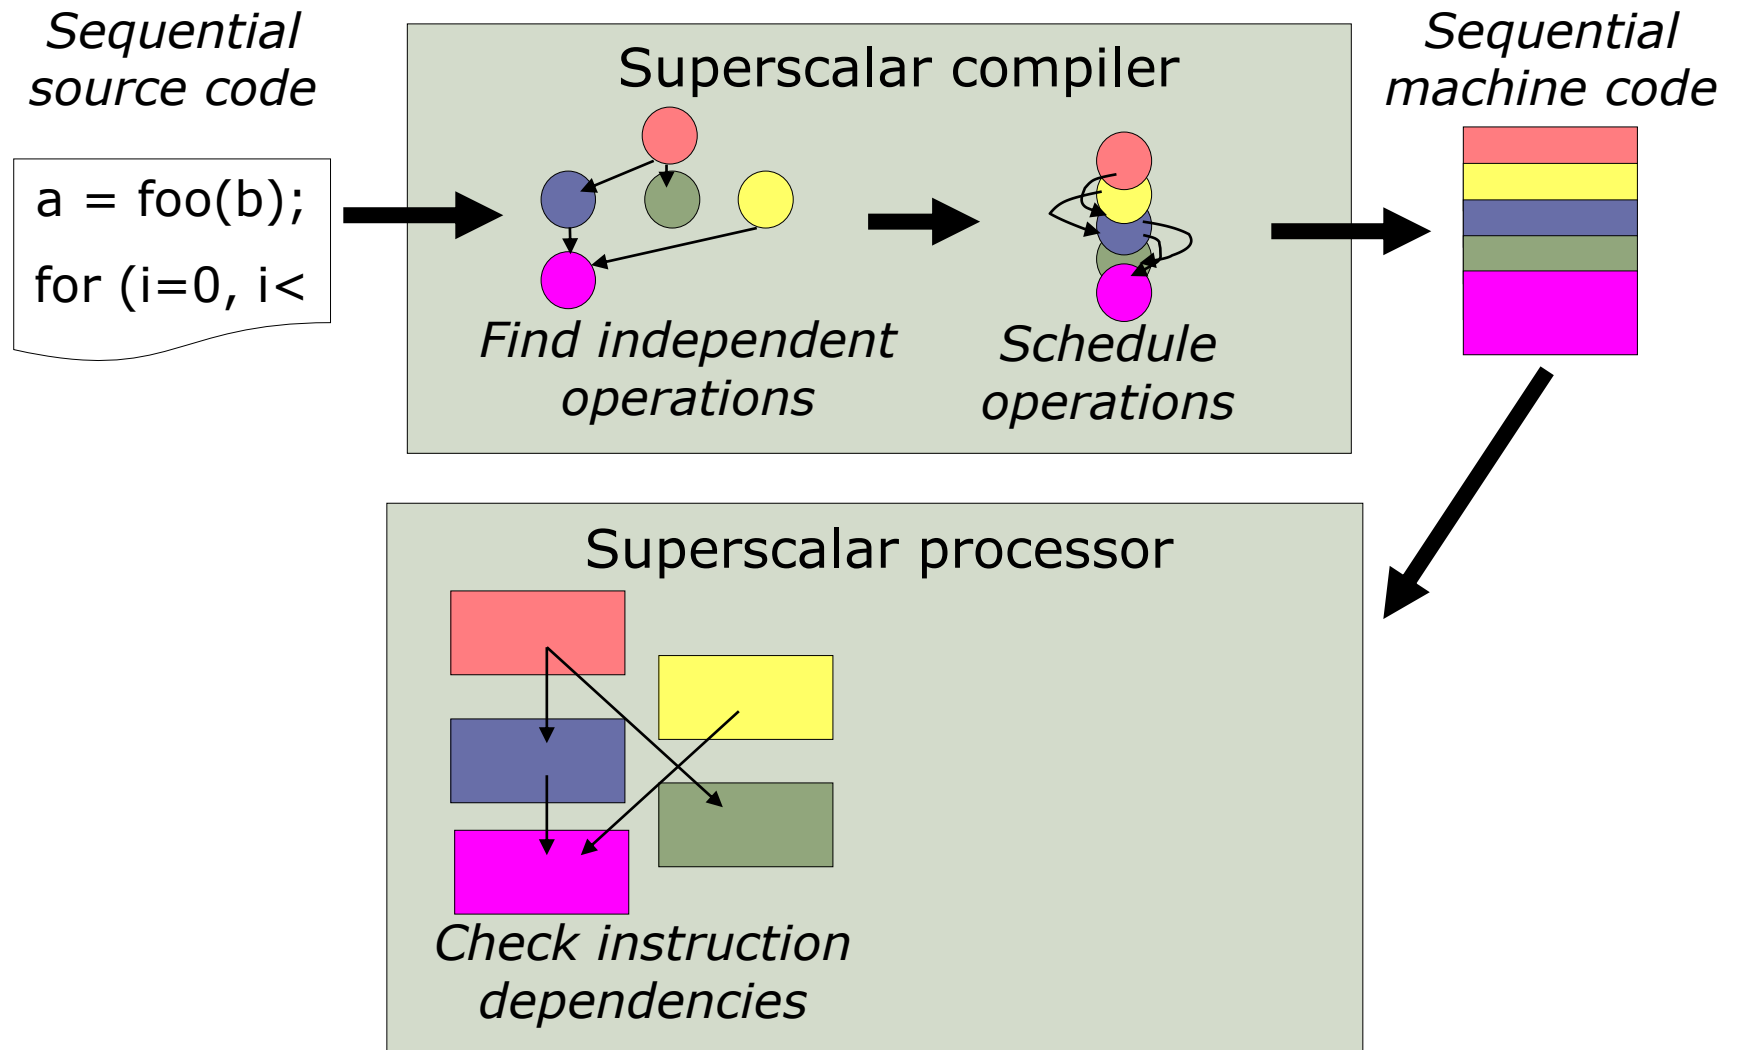


Sequential ISA Bottleneck

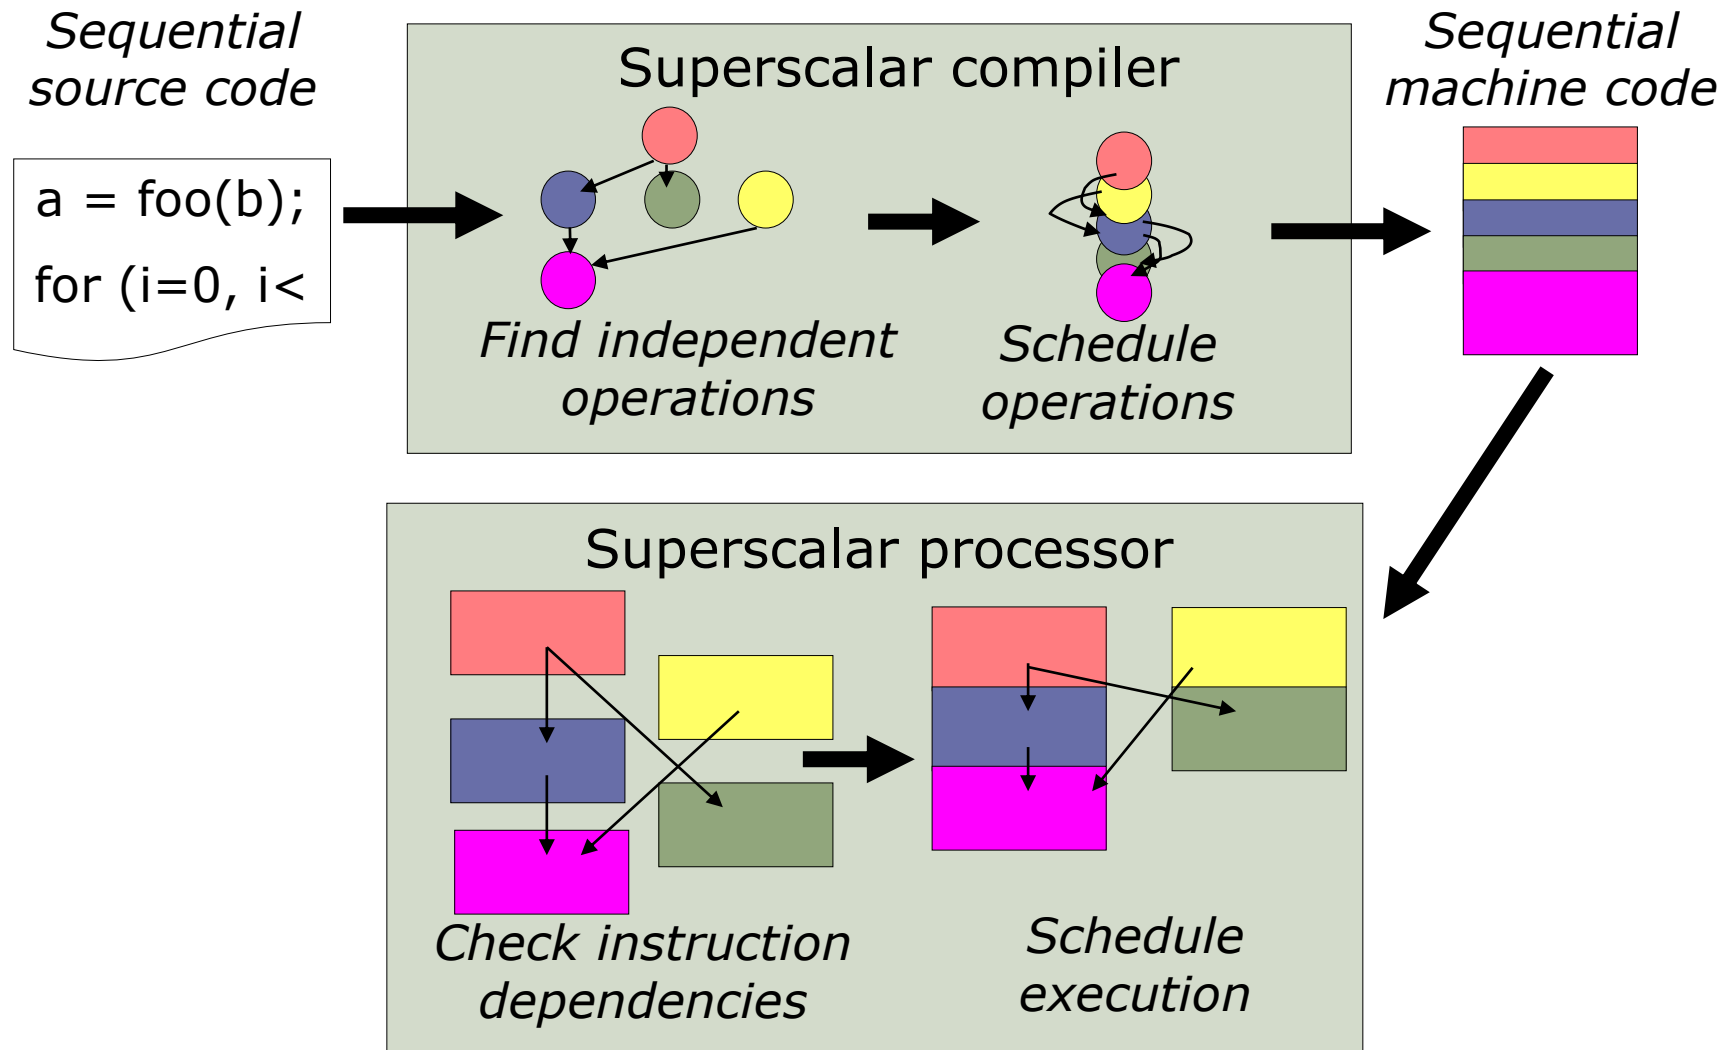

VLIW: Very Long Instruction Word

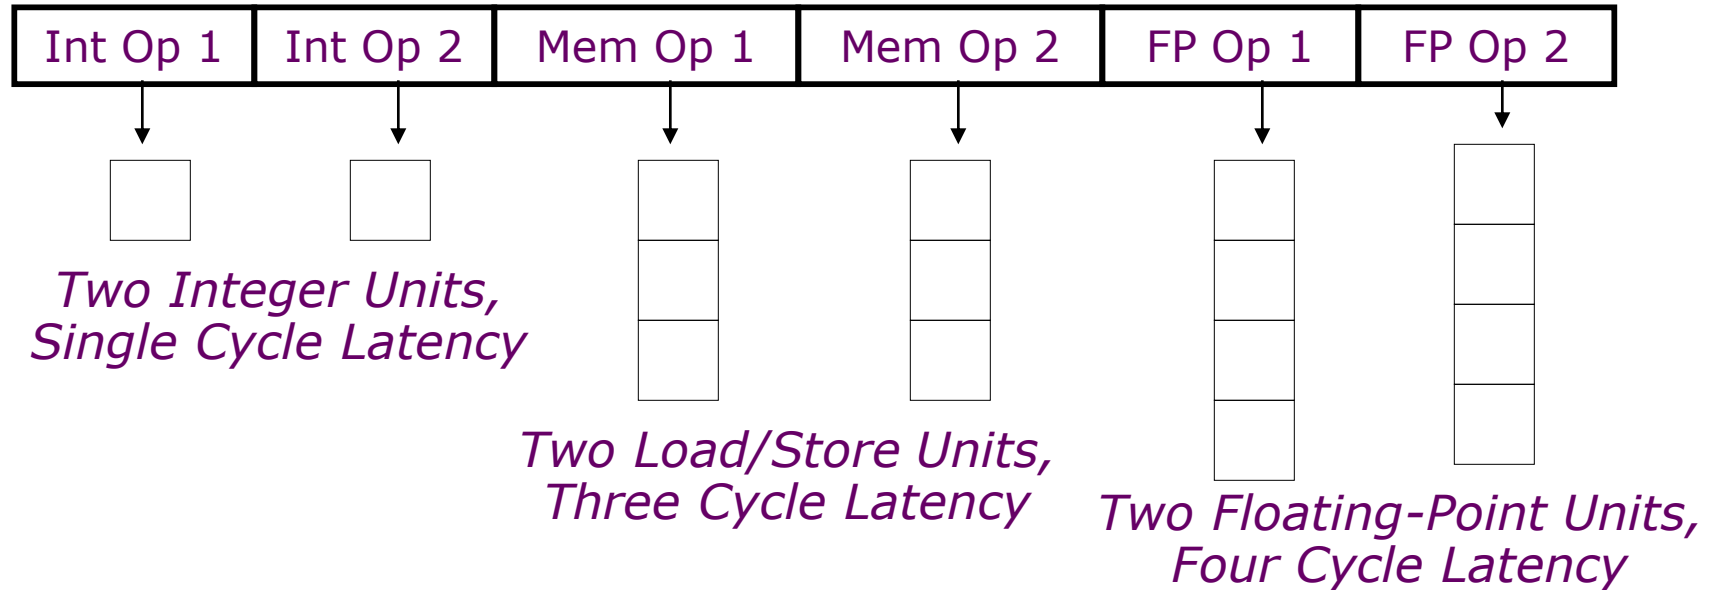


VLIW: Very Long Instruction Word

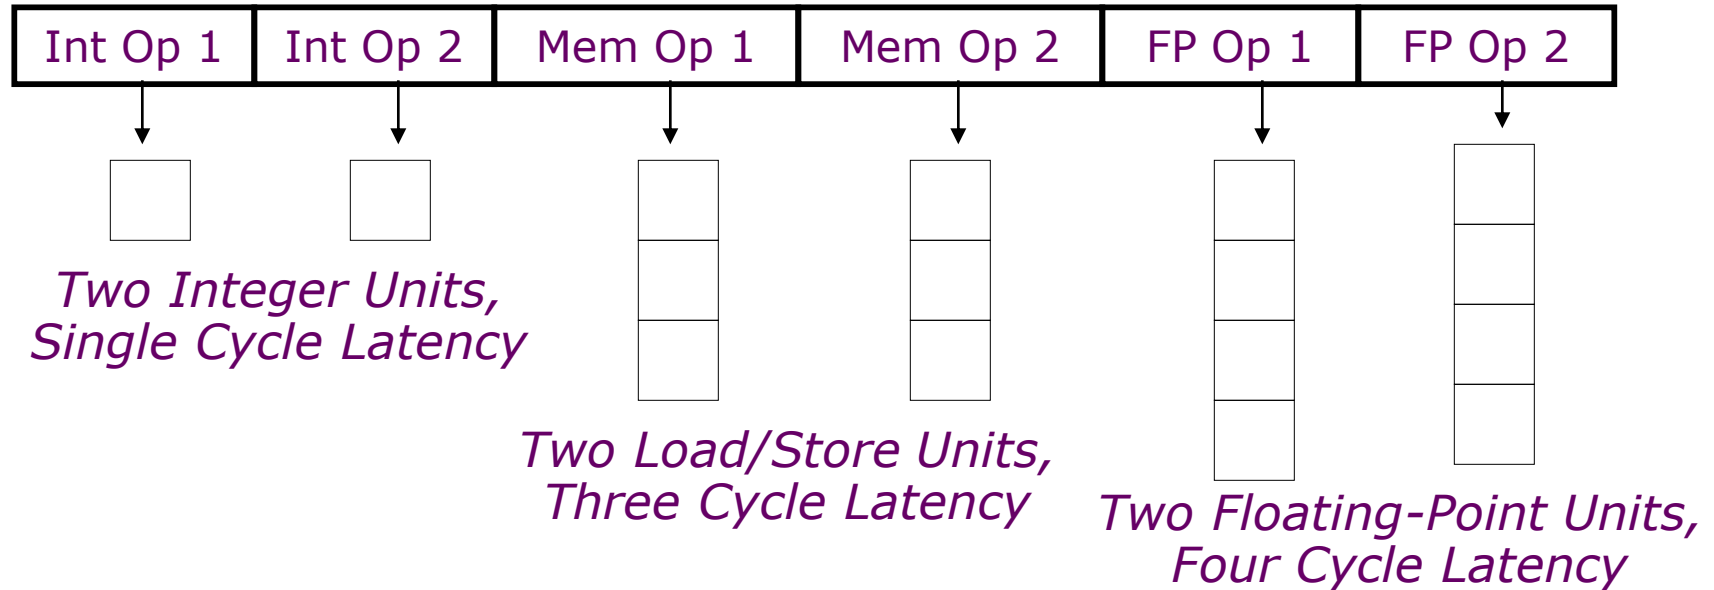


- Multiple operations packed into one instruction

VLIW: Very Long Instruction Word

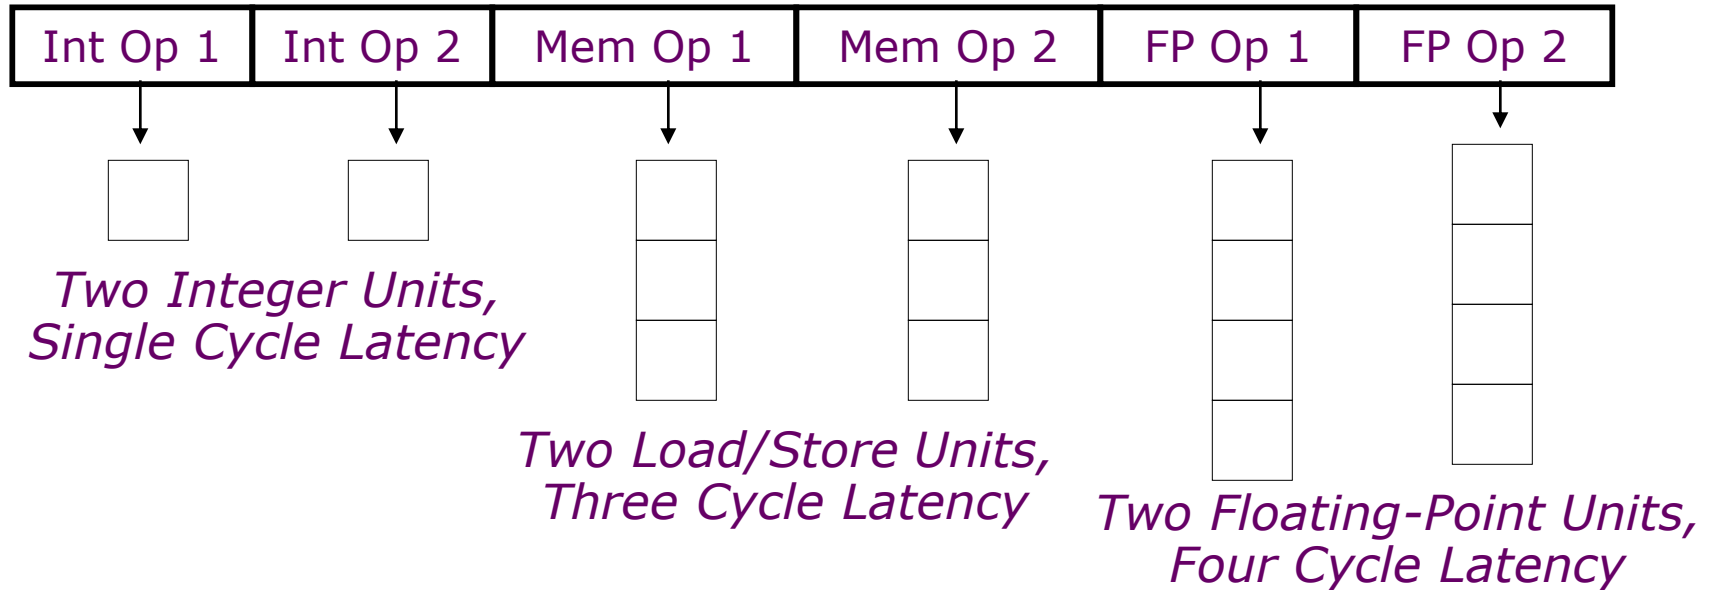

- Multiple operations packed into one instruction
- Each operation slot is for a fixed function

VLIW: Very Long Instruction Word

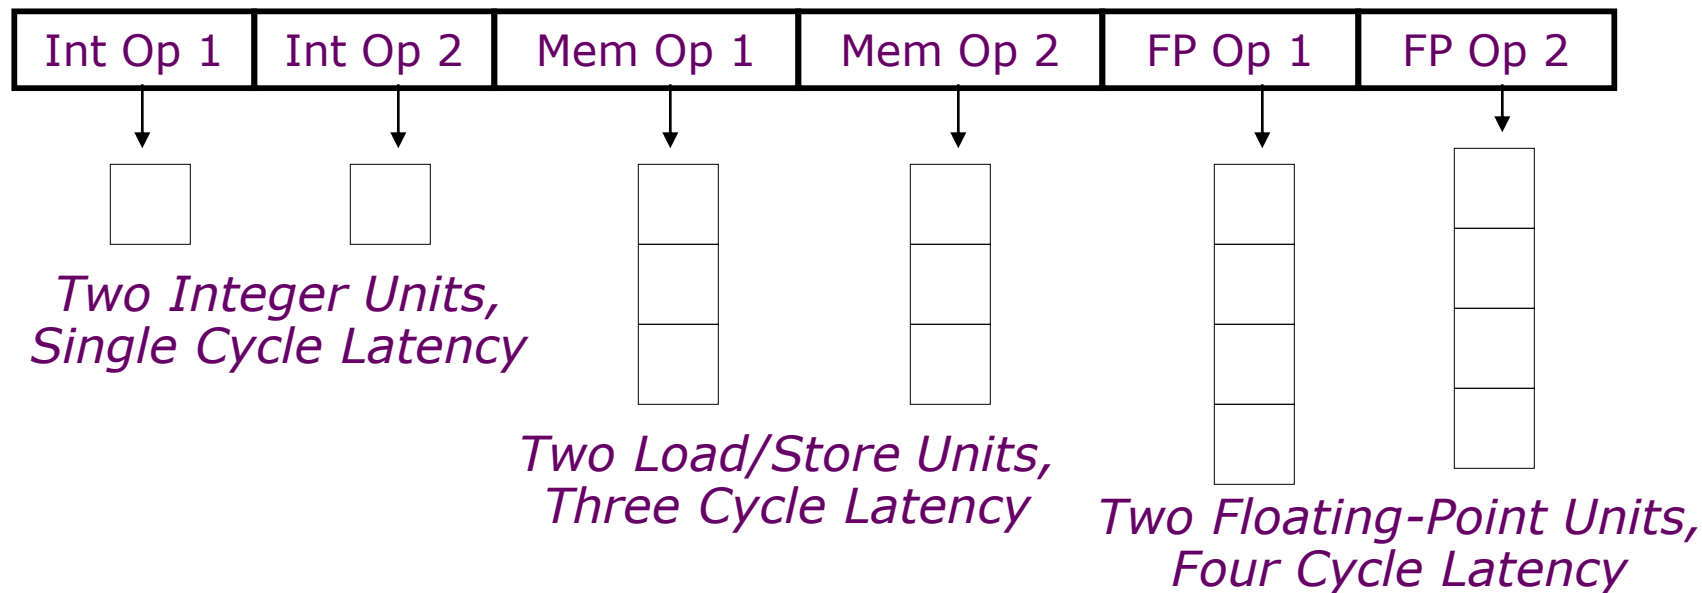

- Multiple operations packed into one instruction
- Each operation slot is for a fixed function
- Constant operation latencies are specified

VLIW Design Principles

The architecture:

- Allows operation parallelism within an instruction
 - No cross-operation RAW check
- Provides deterministic latency for all operations
 - Latency measured in 'instructions'
 - No data use allowed before specified latency with no data interlocks

The compiler:

VLIW Design Principles

The architecture:

- Allows operation parallelism within an instruction
 - No cross-operation RAW check
- Provides deterministic latency for all operations
 - Latency measured in 'instructions'
 - No data use allowed before specified latency with no data interlocks

The compiler:

- Schedules (reorders) to maximize parallel execution

VLIW Design Principles

The architecture:

- Allows operation parallelism within an instruction
 - No cross-operation RAW check
- Provides deterministic latency for all operations
 - Latency measured in 'instructions'
 - No data use allowed before specified latency with no data interlocks

The compiler:

- Schedules (reorders) to maximize parallel execution
- Guarantees intra-instruction parallelism

VLIW Design Principles

The architecture:

- Allows operation parallelism within an instruction
 - No cross-operation RAW check
- Provides deterministic latency for all operations
 - Latency measured in 'instructions'
 - No data use allowed before specified latency with no data interlocks

The compiler:

- Schedules (reorders) to maximize parallel execution
- Guarantees intra-instruction parallelism
- Schedules to avoid data hazards (no interlocks)
 - Typically separates operations with explicit NOPs

Early VLIW Machines

- FPS AP120B (1976)
 - scientific attached array processor
 - first commercial wide instruction machine
 - hand-coded vector math libraries using software pipelining and loop unrolling
- Multiflow Trace (1987)
 - commercialization of ideas from Fisher's Yale group including "trace scheduling"
 - available in configurations with 7, 14, or 28 operations/instruction
 - 28 operations packed into a 1024-bit instruction word
- Cydrome Cydra-5 (1987)
 - 7 operations encoded in 256-bit instruction word
 - rotating register file

Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld			

Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1	Int 2	M1	M2	FP+	FPx
add r1		ld			

Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1	Int 2	M1	M2	FP+	FPx
add r1		ld			
				fadd	

Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```


Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1	Int 2	M1	M2	FP+	FPx
add r1		ld			
				fadd	



Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```


Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1	Int 2	M1	M2	FP+	FPx
add r1		ld			
				fadd	
		sd			



Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1	Int 2	M1	M2	FP+	FPx
add r1		ld			
				fadd	
		sd			

Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1	Int 2	M1	M2	FP+	FPx
add r1		ld			
				fadd	
add r2		sd			

Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1	Int 2	M1	M2	FP+	FPx
add r1		ld			
				fadd	
add r2	bne	sd			

Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1	Int 2	M1	M2	FP+	FPx
add r1		ld			
				fadd	
add r2	bne	sd			

How many FP ops/cycle?

Loop Execution

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Compile

```
loop: ld f1, 0(r1)  
      add r1, 8  
      fadd f2, f0, f1  
      sd f2, 0(r2)  
      add r2, 8  
      bne r1, r3, loop
```

loop:

Schedule

Int1	Int 2	M1	M2	FP+	FPx
add r1		ld			
				fadd	
add r2	bne	sd			

How many FP ops/cycle?
1 fadd / 8 cycles = 0.125

Loop Unrolling

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Unroll inner loop to
perform 4 iterations
at once

```
for (i=0; i<N; i+=4)  
{  
    B[i]    = A[i] + C;  
    B[i+1] = A[i+1] + C;  
    B[i+2] = A[i+2] + C;  
    B[i+3] = A[i+3] + C;  
}
```

Loop Unrolling

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Unroll inner loop to
perform 4 iterations
at once

```
for (i=0; i<N; i+=4)  
{  
    B[i]    = A[i] + C;  
    B[i+1] = A[i+1] + C;  
    B[i+2] = A[i+2] + C;  
    B[i+3] = A[i+3] + C;  
}
```

Is this code correct?

Loop Unrolling

```
for (i=0; i<N; i++)  
    B[i] = A[i] + C;
```

Unroll inner loop to
perform 4 iterations
at once

```
for (i=0; i<N; i+=4)  
{  
    B[i]    = A[i] + C;  
    B[i+1] = A[i+1] + C;  
    B[i+2] = A[i+2] + C;  
    B[i+3] = A[i+3] + C;  
}
```

Is this code correct?

No, need to handle values of N that are not multiples of
unrolling factor with final cleanup loop

Scheduling Loop Unrolled Code

Unroll 4 ways

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

Scheduling Loop Unrolled Code

Unroll 4 ways

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			

Scheduling Loop Unrolled Code

Unroll 4 ways

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			
		ld f2			
		ld f3			
		ld f4			

Scheduling Loop Unrolled Code

Unroll 4 ways

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			
		ld f2			
		ld f3			
add r1		ld f4			

Scheduling Loop Unrolled Code

Unroll 4 ways

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			
		ld f2			
		ld f3			
add r1		ld f4		fadd f5	

Scheduling Loop Unrolled Code

Unroll 4 ways

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			
		ld f2			
		ld f3			
add r1		ld f4		fadd f5	
				fadd f6	
				fadd f7	
				fadd f8	

Scheduling Loop Unrolled Code

Unroll 4 ways

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			
		ld f2			
		ld f3			
add r1		ld f4		fadd f5	
				fadd f6	
				fadd f7	
				fadd f8	
		sd f5			
		sd f6			
		sd f7			
		sd f8			

Scheduling Loop Unrolled Code

Unroll 4 ways

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			
		ld f2			
		ld f3			
add r1		ld f4		fadd f5	
				fadd f6	
				fadd f7	
				fadd f8	
		sd f5			
		sd f6			
		sd f7			
add r2		sd f8			

Scheduling Loop Unrolled Code

Unroll 4 ways

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			
		ld f2			
		ld f3			
add r1		ld f4		fadd f5	
				fadd f6	
				fadd f7	
				fadd f8	
		sd f5			
		sd f6			
		sd f7			
add r2	bne	sd f8			

Scheduling Loop Unrolled Code

Unroll 4 ways

```

loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
    
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			
		ld f2			
		ld f3			
add r1		ld f4		fadd f5	
				fadd f6	
				fadd f7	
				fadd f8	
		sd f5			
		sd f6			
		sd f7			
add r2	bne	sd f8			

How many FLOPS/cycle?

Scheduling Loop Unrolled Code

Unroll 4 ways

```

loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      sd f8, 24(r2)
      add r2, 32
      bne r1, r3, loop
    
```

loop:

Schedule

Int1 Int 2 M1 M2 FP+ FPx

		ld f1			
		ld f2			
		ld f3			
add r1		ld f4		fadd f5	
				fadd f6	
				fadd f7	
				fadd f8	
		sd f5			
		sd f6			
		sd f7			
add r2	bne	sd f8			

4 fadds / 11 cycles = 0.36

How many FLOPS/cycle?

Software Pipelining

Unroll 4 ways first

```
loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      add r2, 32
      sd f8, -8(r2)
      bne r1, r3, loop
```

Int1	Int 2	M1	M2	FP+	FPx

Software Pipelining

Unroll 4 ways first

```

loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      add r2, 32
      sd f8, -8(r2)
      bne r1, r3, loop
    
```

Int1	Int 2	M1	M2	FP+	FPx
		ld f1			
		ld f2			
		ld f3			
add r1		ld f4			
				fadd f5	
				fadd f6	
				fadd f7	
				fadd f8	
			sd f5		
			sd f6		
	add r2		sd f7		
	bne		sd f8		

Software Pipelining

Unroll 4 ways first

```

loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      add r2, 32
      sd f8, -8(r2)
      bne r1, r3, loop
    
```

Int1	Int 2	M1	M2	FP+	FPx
		ld f1			
		ld f2			
		ld f3			
add r1		ld f4			
		ld f1		fadd f5	
		ld f2		fadd f6	
		ld f3		fadd f7	
add r1		ld f4		fadd f8	
			sd f5	fadd f5	
			sd f6	fadd f6	
	add r2		sd f7	fadd f7	
	bne		sd f8	fadd f8	
			sd f5		
			sd f6		
	add r2		sd f7		
	bne		sd f8		

Software Pipelining

Unroll 4 ways first

```

loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      add r2, 32
      sd f8, -8(r2)
      bne r1, r3, loop
    
```

Int1	Int 2	M1	M2	FP+	FPx
		ld f1			
		ld f2			
		ld f3			
add r1		ld f4			
		ld f1		fadd f5	
		ld f2		fadd f6	
		ld f3		fadd f7	
add r1		ld f4		fadd f8	
		ld f1	sd f5	fadd f5	
		ld f2	sd f6	fadd f6	
	add r2	ld f3	sd f7	fadd f7	
add r1 bne		ld f4	sd f8	fadd f8	
			sd f5	fadd f5	
			sd f6	fadd f6	
	add r2		sd f7	fadd f7	
	bne		sd f8	fadd f8	
			sd f5		

Software Pipelining

Unroll 4 ways first

```

loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      add r2, 32
      sd f8, -8(r2)
      bne r1, r3, loop
    
```

	Int1	Int 2	M1	M2	FP+	FPx
prolog			ld f1			
			ld f2			
			ld f3			
	add r1		ld f4			
			ld f1		fadd f5	
			ld f2		fadd f6	
			ld f3		fadd f7	
	add r1		ld f4		fadd f8	
iterate			ld f1	sd f5	fadd f5	
			ld f2	sd f6	fadd f6	
		add r2	ld f3	sd f7	fadd f7	
	add r1 bne		ld f4	sd f8	fadd f8	
epilog				sd f5	fadd f5	
				sd f6	fadd f6	
		add r2		sd f7	fadd f7	
		bne		sd f8	fadd f8	
				sd f5		

Software Pipelining

Unroll 4 ways first

```

loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      add r2, 32
      sd f8, -8(r2)
      bne r1, r3, loop
    
```

	Int1	Int 2	M1	M2	FP+	FPx
prolog			ld f1			
			ld f2			
			ld f3			
	add r1		ld f4			
			ld f1		fadd f5	
			ld f2		fadd f6	
			ld f3		fadd f7	
	add r1		ld f4		fadd f8	
iterate	loop:					
			ld f1	sd f5	fadd f5	
			ld f2	sd f6	fadd f6	
		add r2	ld f3	sd f7	fadd f7	
epilog	add r1	bne	ld f4	sd f8	fadd f8	
				sd f5	fadd f5	
				sd f6	fadd f6	
		add r2		sd f7	fadd f7	
		bne		sd f8	fadd f8	
				sd f5		

How many FLOPS/cycle?

Software Pipelining

Unroll 4 ways first

```


loop: ld f1, 0(r1)
      ld f2, 8(r1)
      ld f3, 16(r1)
      ld f4, 24(r1)
      add r1, 32
      fadd f5, f0, f1
      fadd f6, f0, f2
      fadd f7, f0, f3
      fadd f8, f0, f4
      sd f5, 0(r2)
      sd f6, 8(r2)
      sd f7, 16(r2)
      add r2, 32
      sd f8, -8(r2)
      bne r1, r3, loop
    
```

	Int1	Int 2	M1	M2	FP+	FPx
prolog			ld f1			
			ld f2			
			ld f3			
	add r1		ld f4			
			ld f1		fadd f5	
			ld f2		fadd f6	
			ld f3		fadd f7	
	add r1		ld f4		fadd f8	
iterate			ld f1	sd f5	fadd f5	
			ld f2	sd f6	fadd f6	
		add r2	ld f3	sd f7	fadd f7	
	add r1 bne		ld f4	sd f8	fadd f8	
epilog				sd f5	fadd f5	
				sd f6	fadd f6	
		add r2		sd f7	fadd f7	
		bne		sd f8	fadd f8	
				sd f5		


How many FLOPS/cycle?
 $4 \text{ fadds} / 4 \text{ cycles} = 1$

Software Pipelining vs. Unrolling

Loop Unrolling

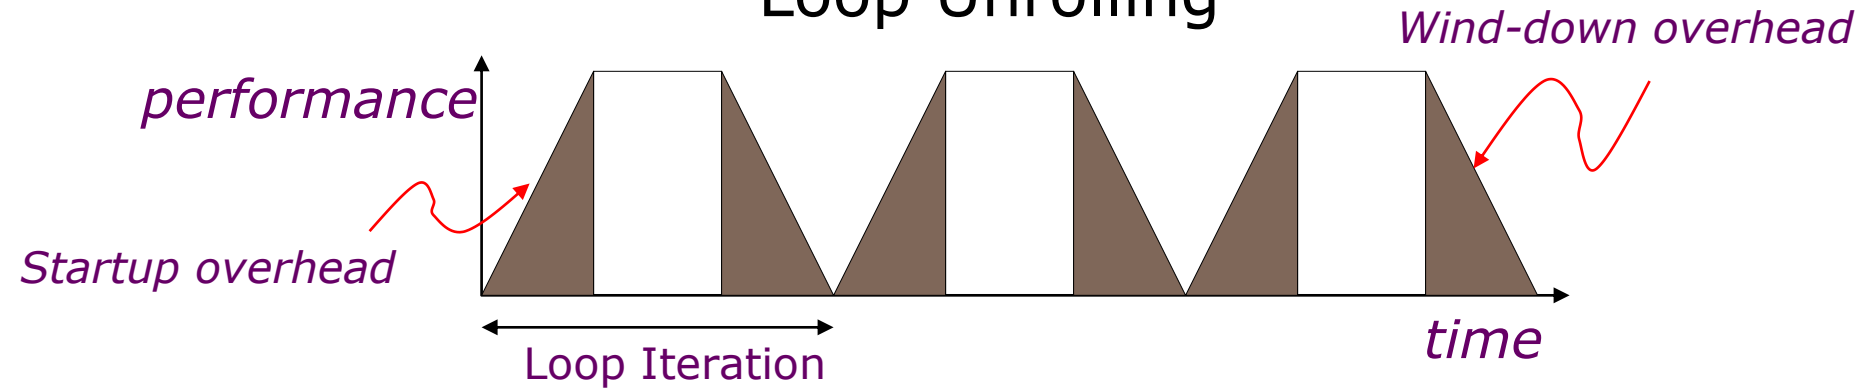


Software Pipelining

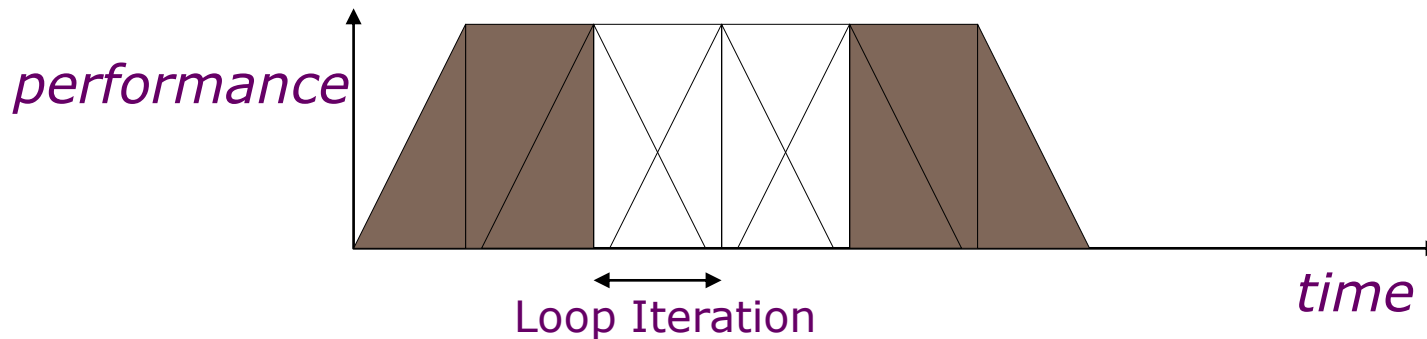

Software pipelining pays startup/wind-down costs only once per loop, not once per iteration

What if there are no loops?

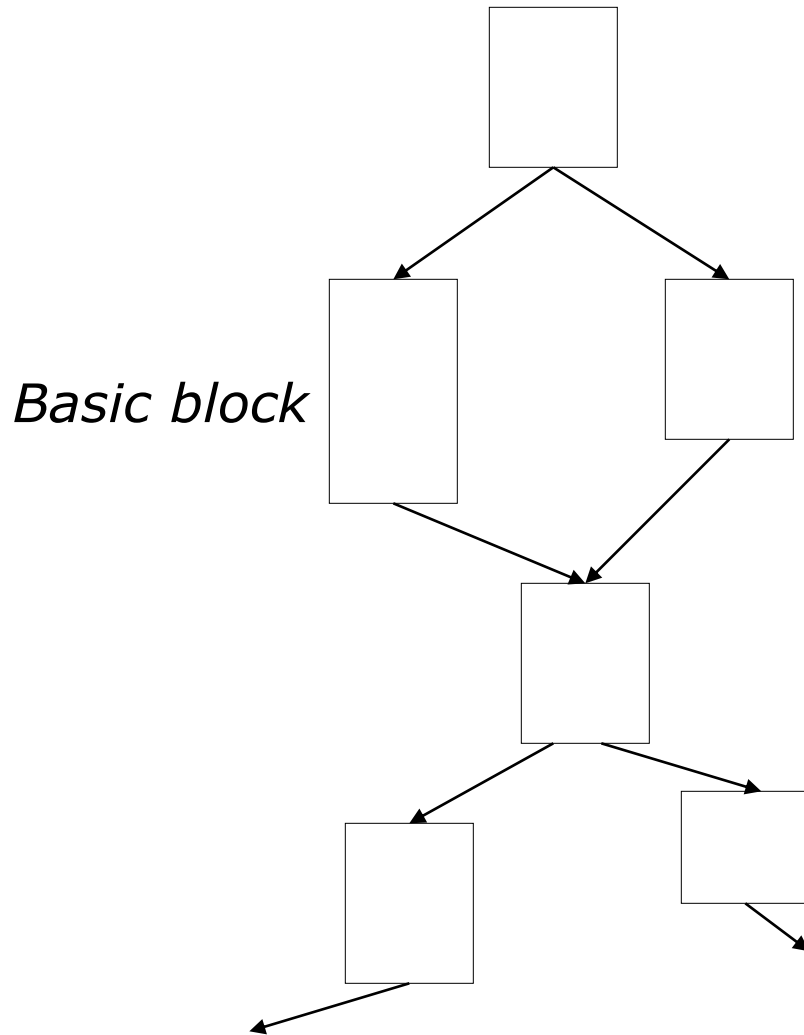


- Branches limit basic block size in control-flow intensive irregular code
- Difficult to find ILP in individual basic blocks

Trace Scheduling


[Fisher, Ellis]

- Pick string of basic blocks, a trace, that represents most frequent branch path
- Schedule whole “trace” at once
- Add fixup code to cope with branches jumping out of trace

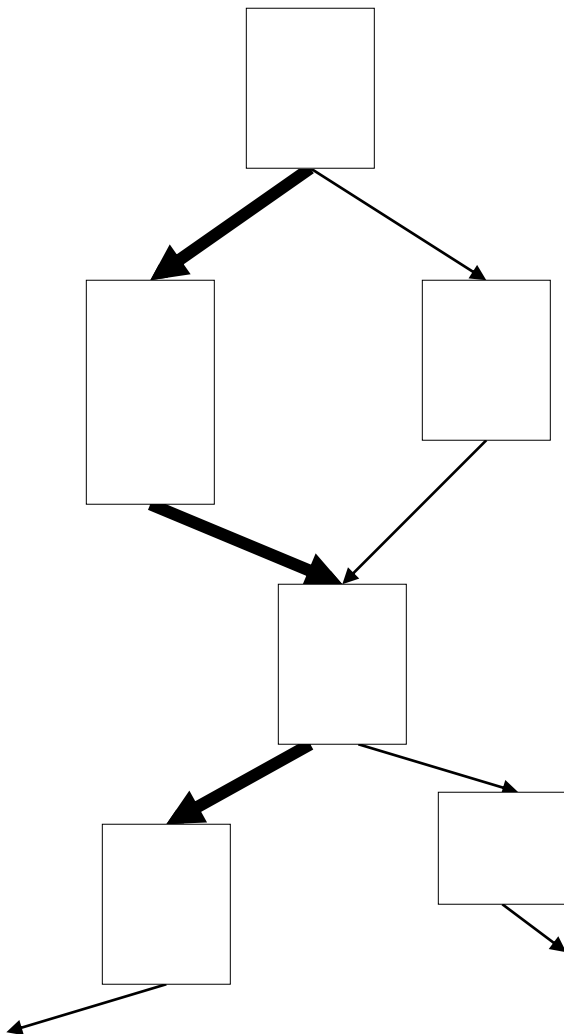

Trace Scheduling


[Fisher, Ellis]

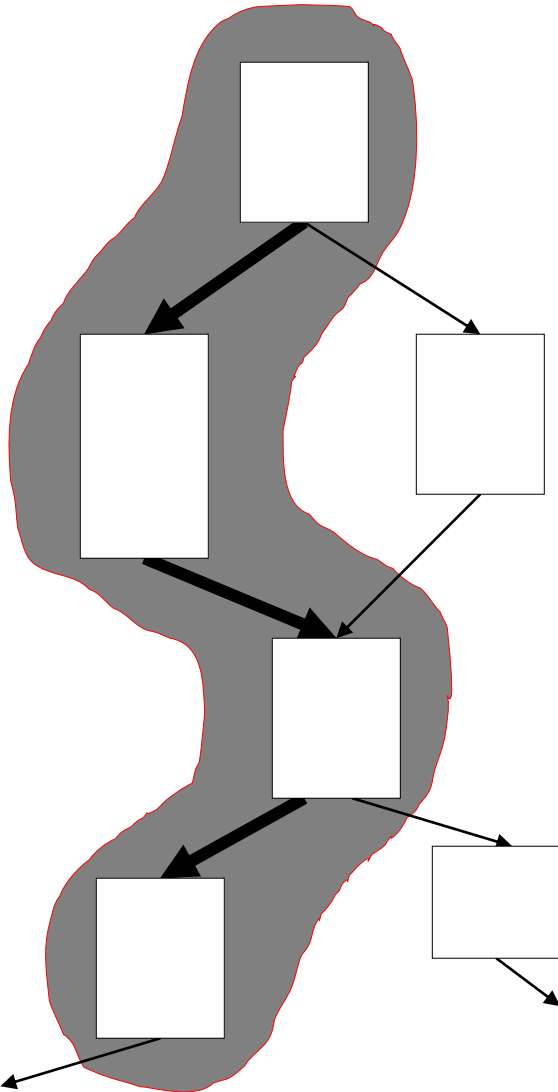

- Pick string of basic blocks, a trace, that represents most frequent branch path
- Schedule whole “trace” at once
- Add fixup code to cope with branches jumping out of trace

Trace Scheduling

[Fisher, Ellis]

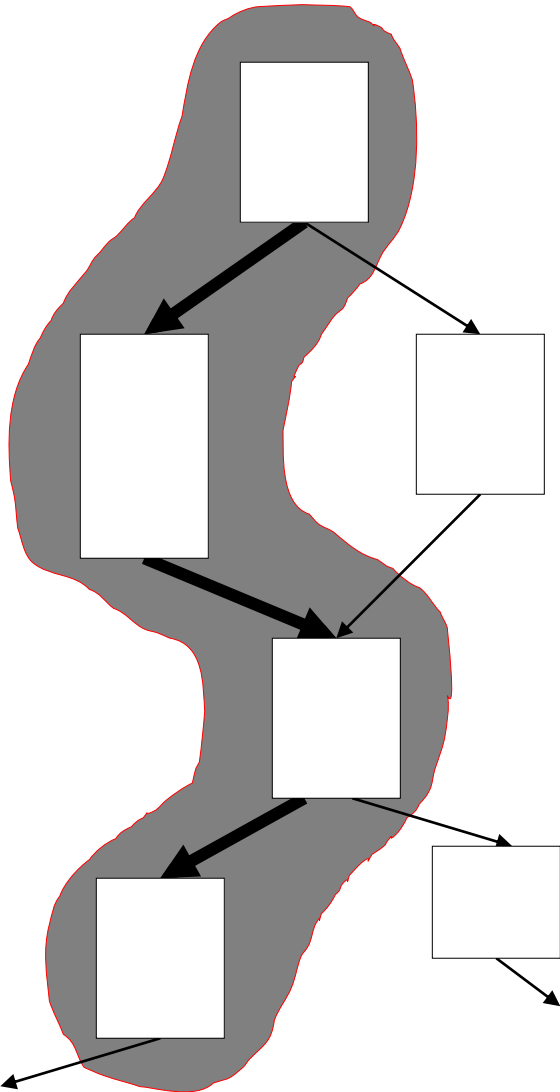


- Pick string of basic blocks, a trace, that represents most frequent branch path
- Schedule whole “trace” at once
- Add fixup code to cope with branches jumping out of trace

How do we know which trace to pick?

Trace Scheduling

[Fisher, Ellis]

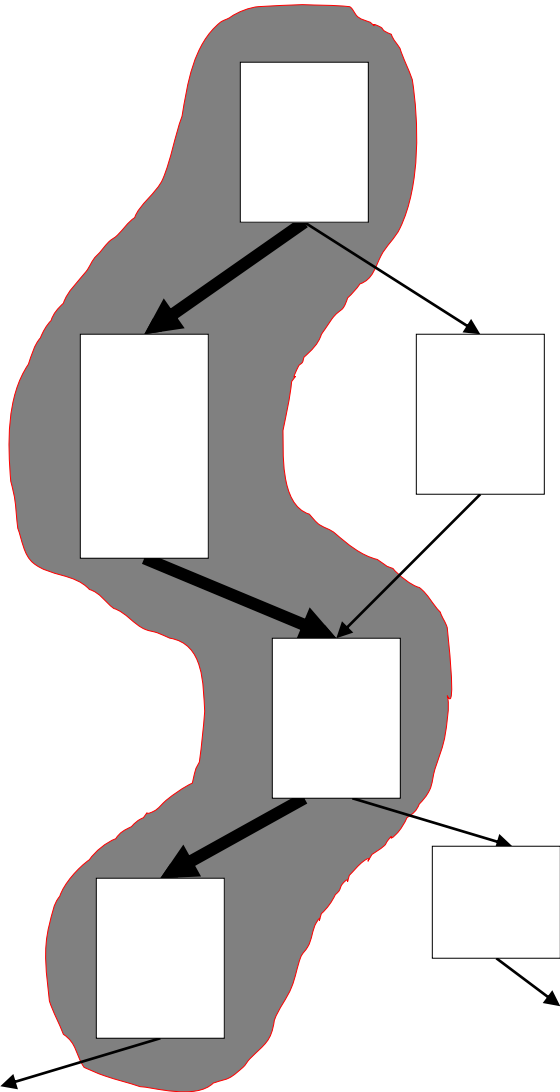

- Pick string of basic blocks, a trace, that represents most frequent branch path
- Schedule whole “trace” at once
- Add fixup code to cope with branches jumping out of trace

How do we know which trace to pick?

Use profiling feedback or compiler heuristics to find common branch paths

Problems with “Classic” VLIW

Problems with “Classic” VLIW

- Knowing branch probabilities
 - Profiling requires an significant extra step in build process

Problems with “Classic” VLIW

- Knowing branch probabilities
 - Profiling requires an significant extra step in build process
- Scheduling for statically unpredictable branches
 - Optimal schedule varies with branch path

Problems with “Classic” VLIW

- Knowing branch probabilities
 - Profiling requires a significant extra step in build process
- Scheduling for statically unpredictable branches
 - Optimal schedule varies with branch path
- Object code size
 - Instruction padding wastes instruction memory/cache
 - Loop unrolling/software pipelining replicates code

Problems with “Classic” VLIW


- Knowing branch probabilities
 - Profiling requires an significant extra step in build process
- Scheduling for statically unpredictable branches
 - Optimal schedule varies with branch path
- Object code size
 - Instruction padding wastes instruction memory/cache
 - Loop unrolling/software pipelining replicates code
- Scheduling memory operations
 - Caches and/or memory bank conflicts impose statically unpredictable variability
 - Uncertainty about addresses limit code reordering

Problems with “Classic” VLIW

- Knowing branch probabilities
 - Profiling requires an significant extra step in build process
- Scheduling for statically unpredictable branches
 - Optimal schedule varies with branch path
- Object code size
 - Instruction padding wastes instruction memory/cache
 - Loop unrolling/software pipelining replicates code
- Scheduling memory operations
 - Caches and/or memory bank conflicts impose statically unpredictable variability
 - Uncertainty about addresses limit code reordering
- Object-code compatibility
 - Have to recompile all code for every machine, even for two machines in same generation

VLIW Instruction Encoding

- Schemes to reduce effect of unused fields
 - Compressed format in memory, expand on I-cache refill
 - used in Multiflow Trace
 - introduces instruction addressing challenge
 - Provide a single-op VLIW instruction
 - Cydra-5 UniOp instructions
 - Mark parallel groups
 - used in TMS320C6x DSPs, Intel IA-64

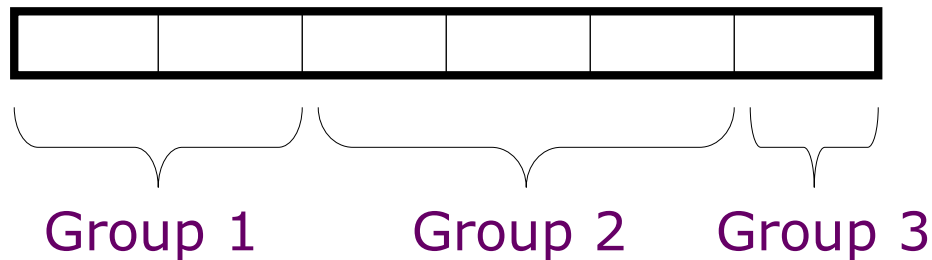

Cydra-5: Memory Latency Register (MLR)

Cydra-5: Memory Latency Register (MLR)

- Problem: Loads have variable latency

Cydra-5: Memory Latency Register (MLR)

- Problem: Loads have variable latency
- Solution: Let software choose desired memory latency

Cydra-5: Memory Latency Register (MLR)

- Problem: Loads have variable latency
- Solution: Let software choose desired memory latency
- Compiler schedules code for maximum load-use distance

Cydra-5: Memory Latency Register (MLR)

- Problem: Loads have variable latency
- Solution: Let software choose desired memory latency
- Compiler schedules code for maximum load-use distance
- Software sets MLR to latency that matches code schedule

Cydra-5: Memory Latency Register (MLR)

- Problem: Loads have variable latency
- Solution: Let software choose desired memory latency
- Compiler schedules code for maximum load-use distance
- Software sets MLR to latency that matches code schedule
- Hardware ensures that loads take exactly MLR cycles to return values into processor pipeline
 - Hardware buffers loads that return early
 - Hardware stalls processor if loads return late

IA-64 Predicated Execution

IA-64 Predicated Execution

Problem: Mispredicted branches limit ILP

IA-64 Predicated Execution

Problem: Mispredicted branches limit ILP

Solution: Eliminate hard-to-predict branches with predicated execution


- Almost all IA-64 instructions can be executed conditionally under predicate
- Instruction becomes NOP if predicate register false

IA-64 Predicated Execution

Problem: Mispredicted branches limit ILP

Solution: Eliminate hard-to-predict branches with predicated execution

- Almost all IA-64 instructions can be executed conditionally under predicate
- Instruction becomes NOP if predicate register false

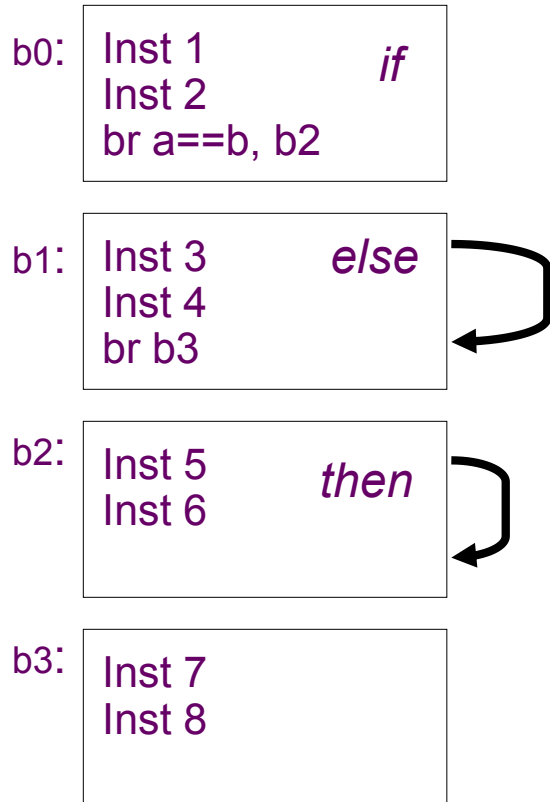


Four basic blocks

IA-64 Predicated Execution


Problem: Mispredicted branches limit ILP

Solution: Eliminate hard-to-predict branches with predicated execution

- Almost all IA-64 instructions can be executed conditionally under predicate
- Instruction becomes NOP if predicate register false

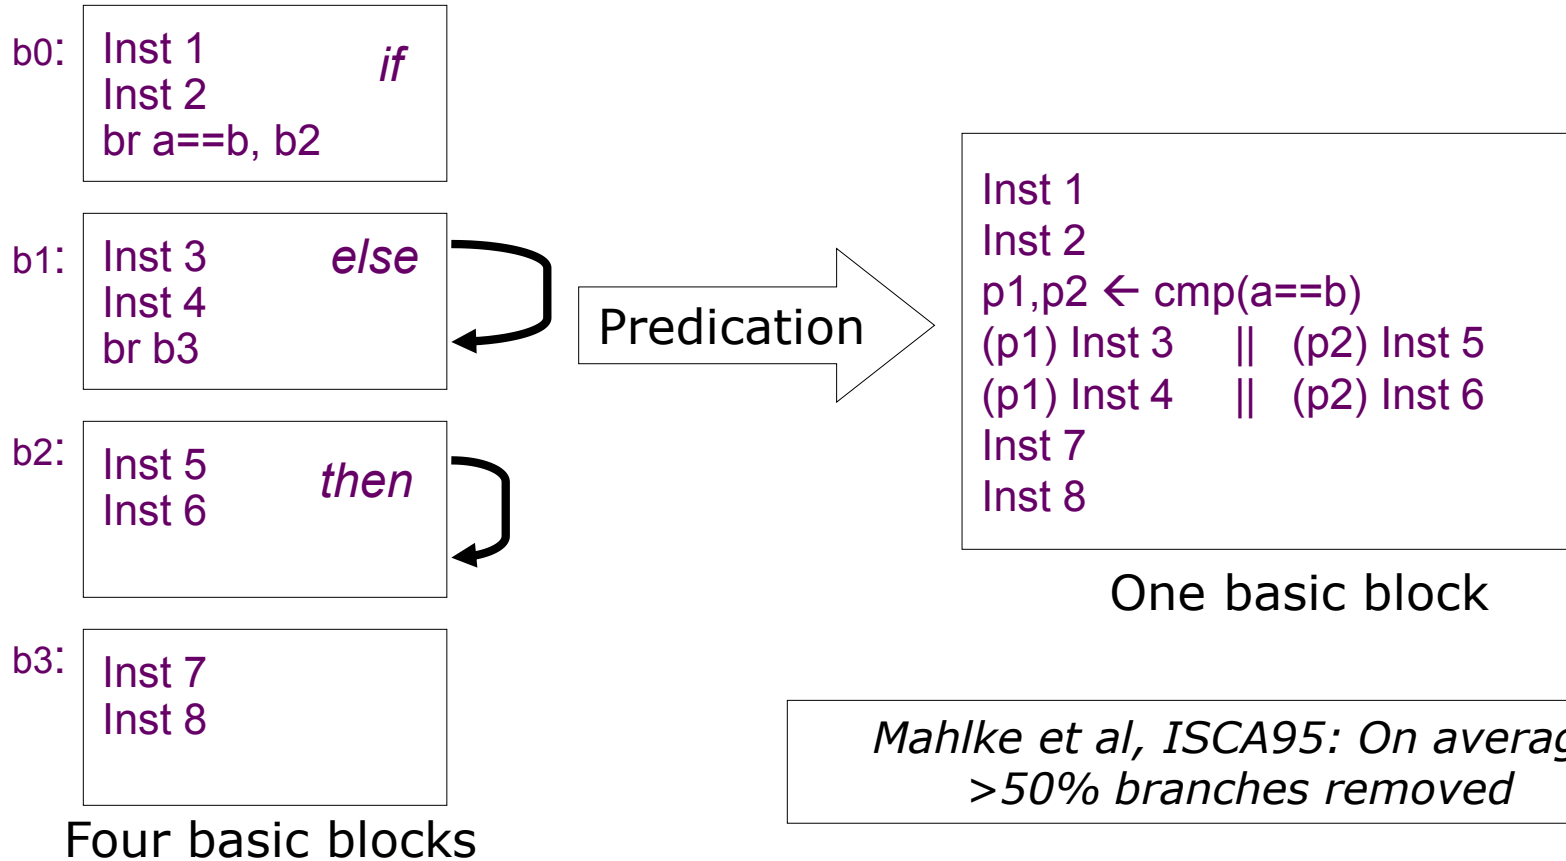


Fully Bypassed Datapath

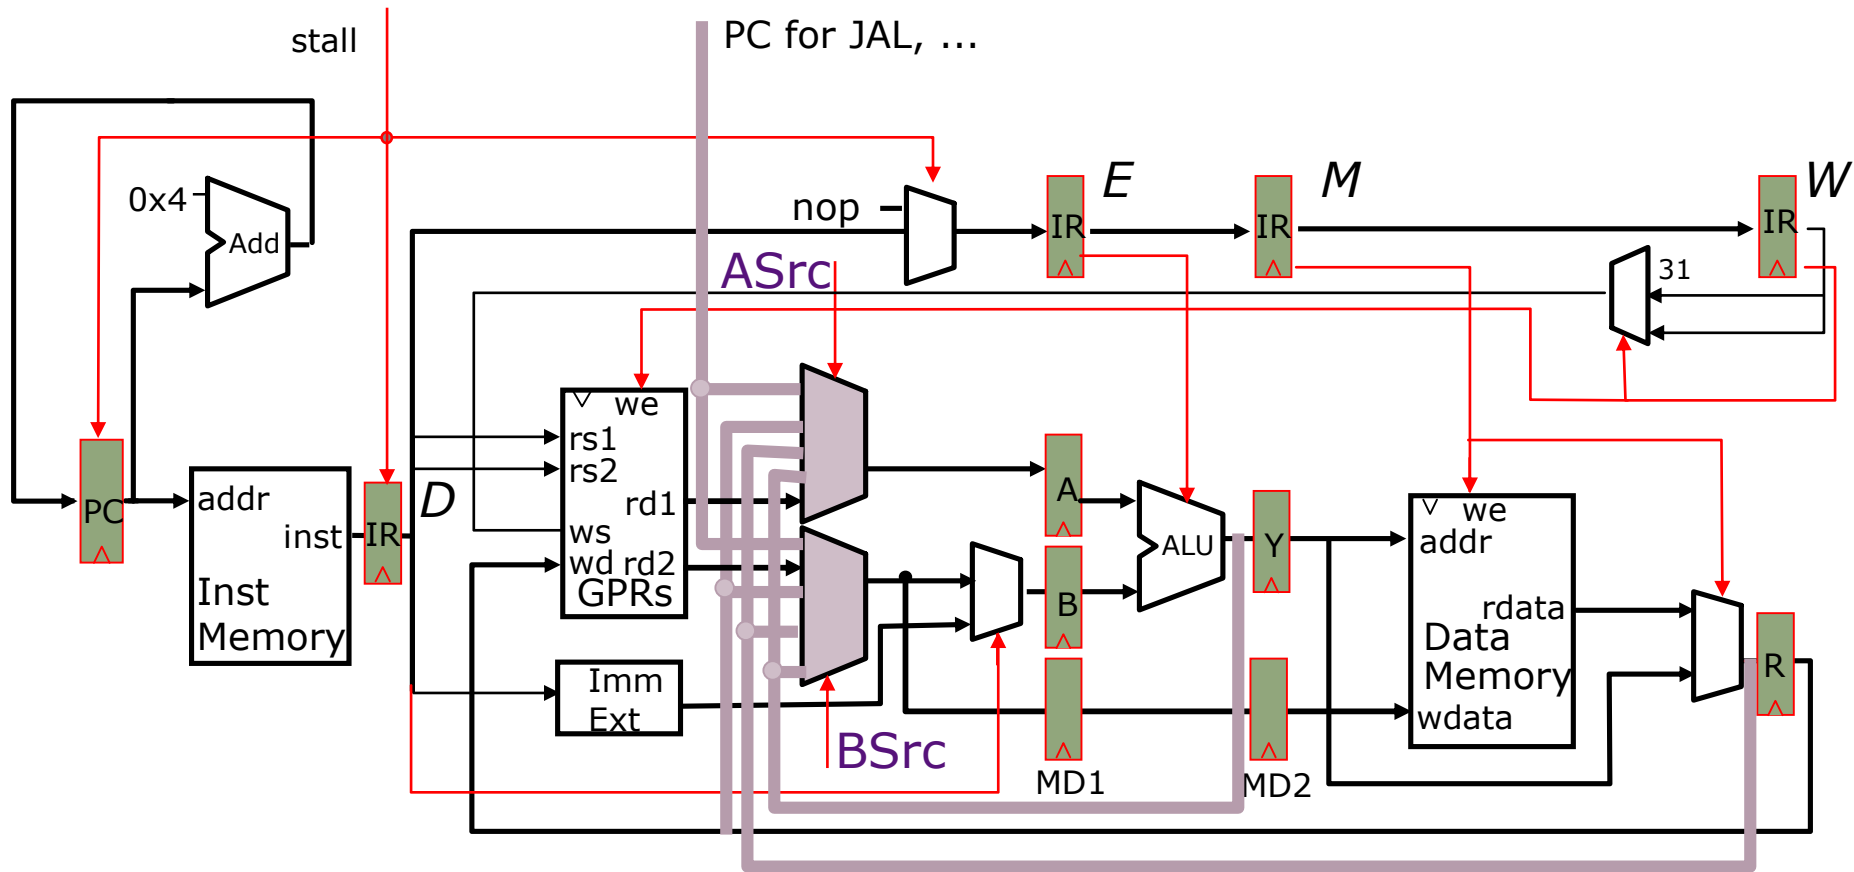

Where does predication fit in?


IA-64 Speculative Execution

Problem: Branches restrict compiler code motion

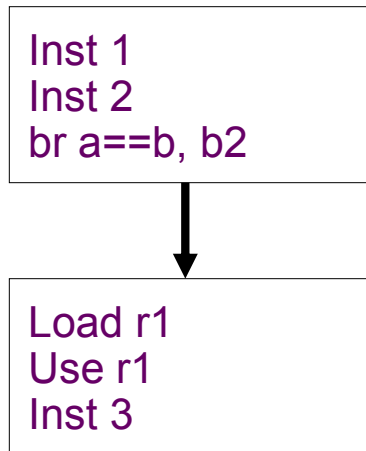

IA-64 Speculative Execution

Problem: Branches restrict compiler code motion

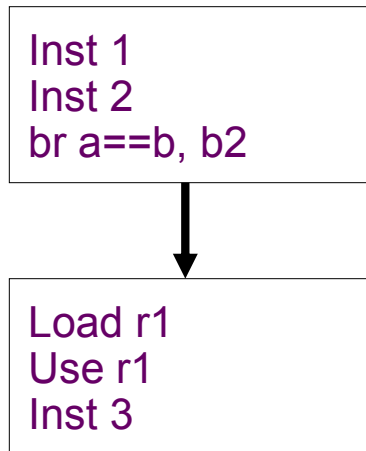


*Can't move load above branch
because might cause spurious
exception*

IA-64 Speculative Execution

Problem: Branches restrict compiler code motion

Solution: Speculative operations that don't cause exceptions

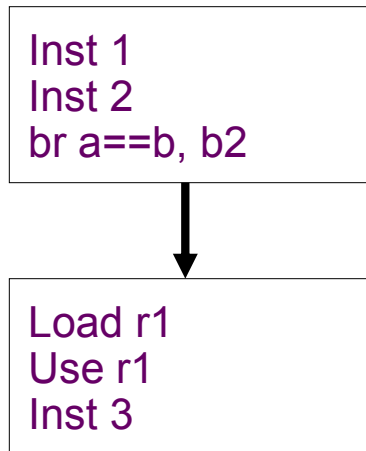


*Can't move load above branch
because might cause spurious
exception*

IA-64 Speculative Execution

Problem: Branches restrict compiler code motion


Solution: Speculative operations that don't cause exceptions

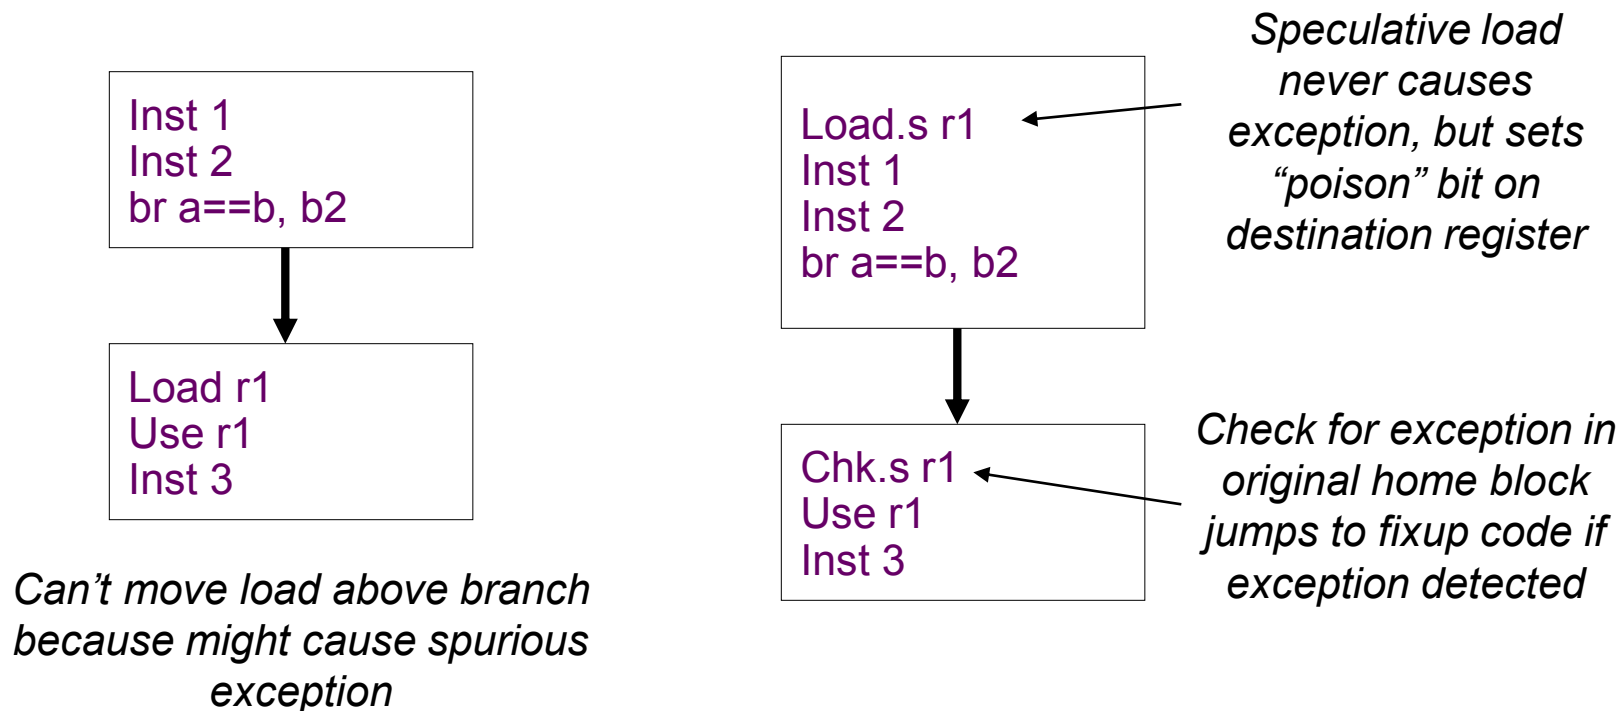

IA-64 Speculative Execution

Problem: Branches restrict compiler code motion

Solution: Speculative operations that don't cause exceptions

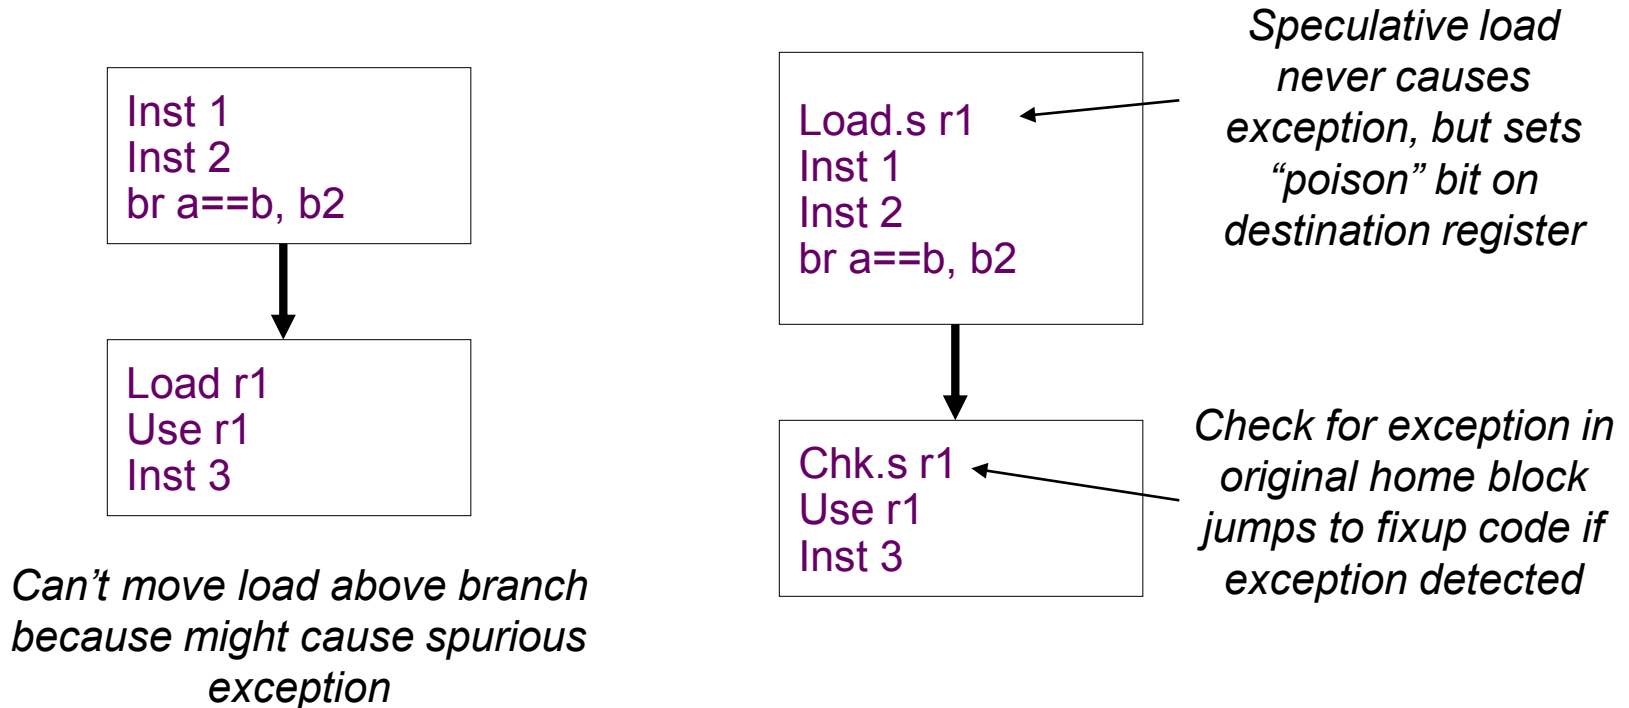


Particularly useful for scheduling long latency loads early

IA-64 Data Speculation

Problem: Possible memory hazards limit code scheduling

IA-64 Data Speculation

Problem: Possible memory hazards limit code scheduling

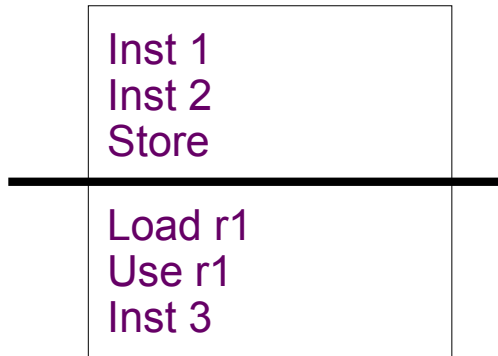


*Can't move load above store
because store might be to same
address*

IA-64 Data Speculation

Problem: Possible memory hazards limit code scheduling

Solution: Instruction-based speculation with hardware monitor to check for pointer hazards

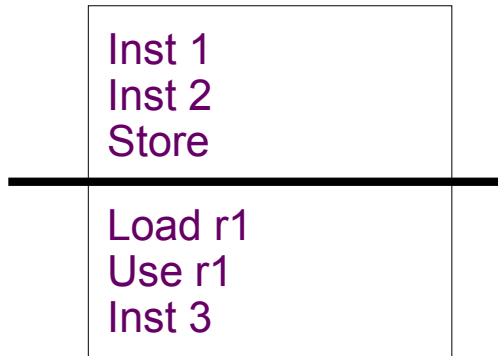


*Can't move load above store
because store might be to same
address*

IA-64 Data Speculation

Problem: Possible memory hazards limit code scheduling


Solution: Instruction-based speculation with hardware monitor to check for pointer hazards

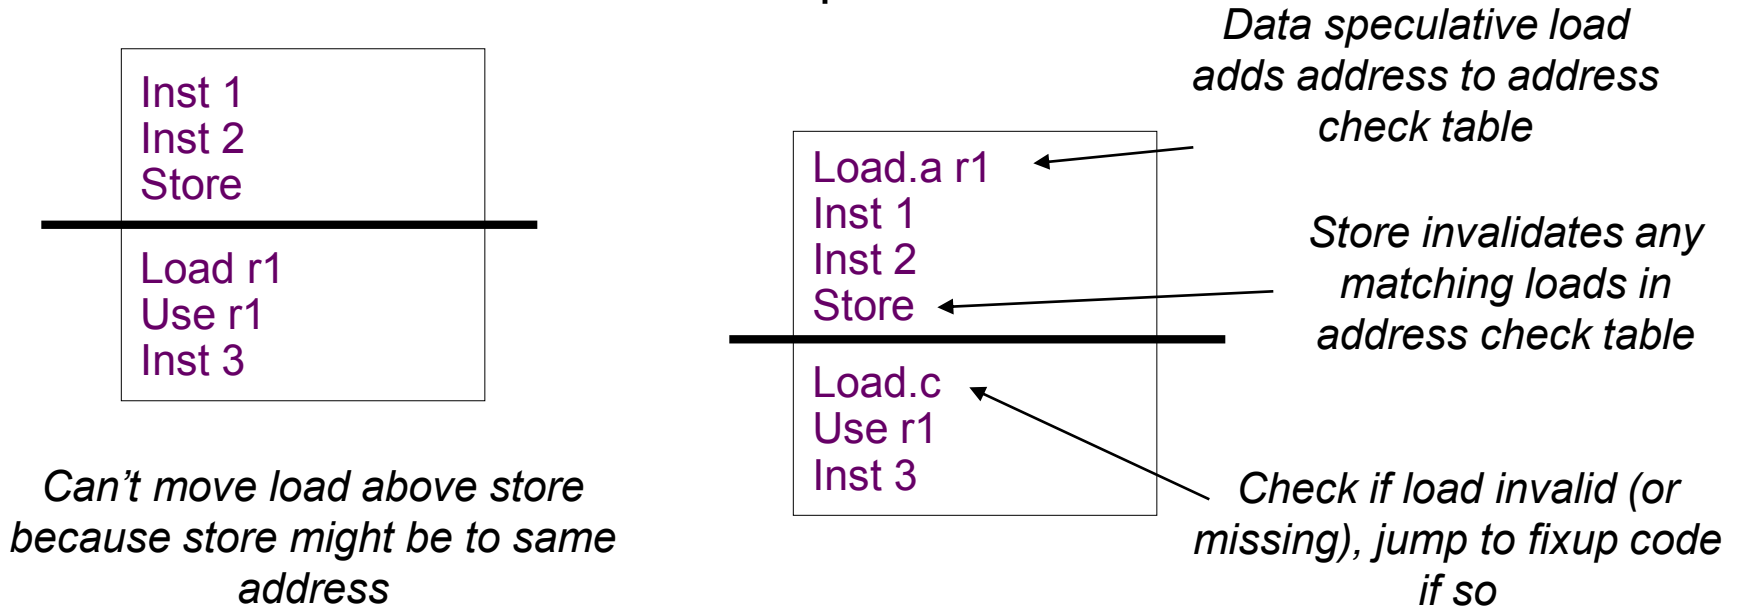

IA-64 Data Speculation


Problem: Possible memory hazards limit code scheduling

Solution: Instruction-based speculation with hardware monitor to check for pointer hazards

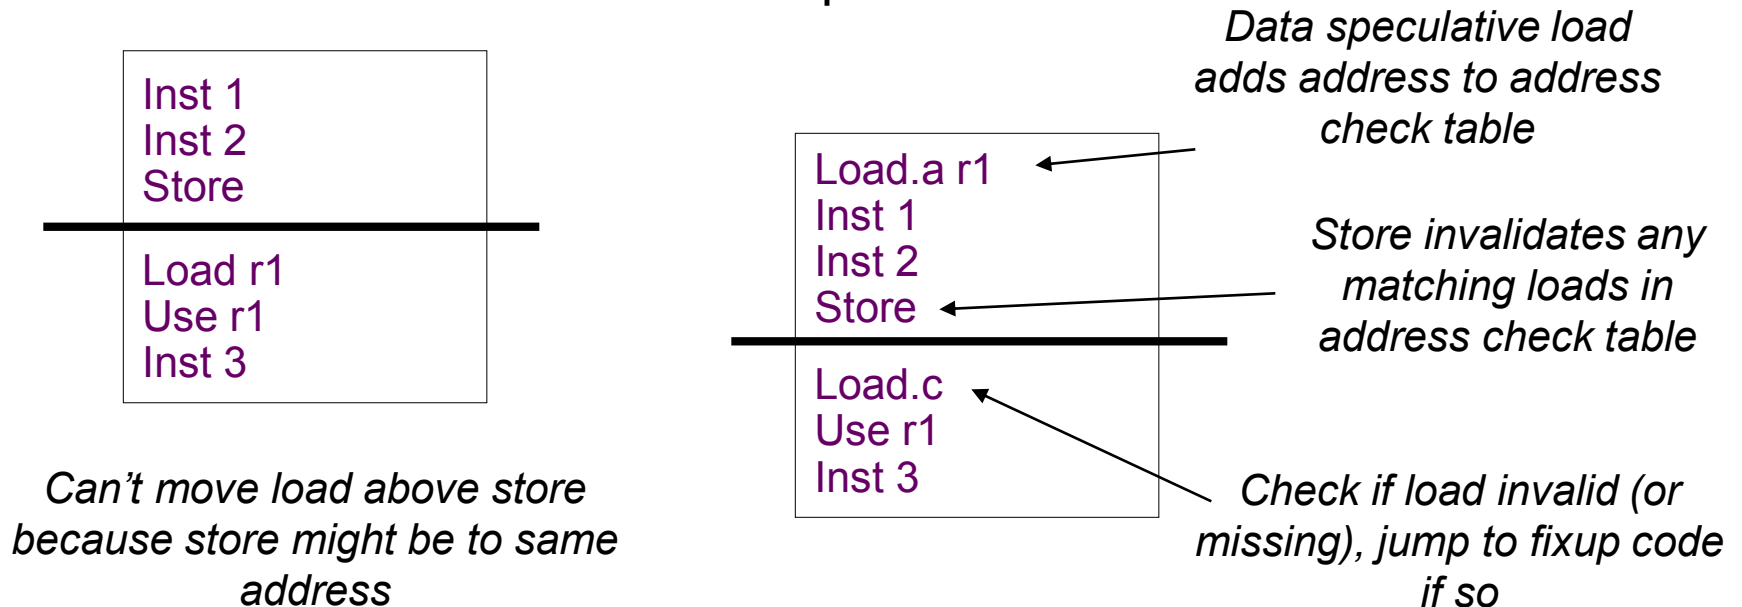

Requires associative hardware in address check table

Clustered VLIW

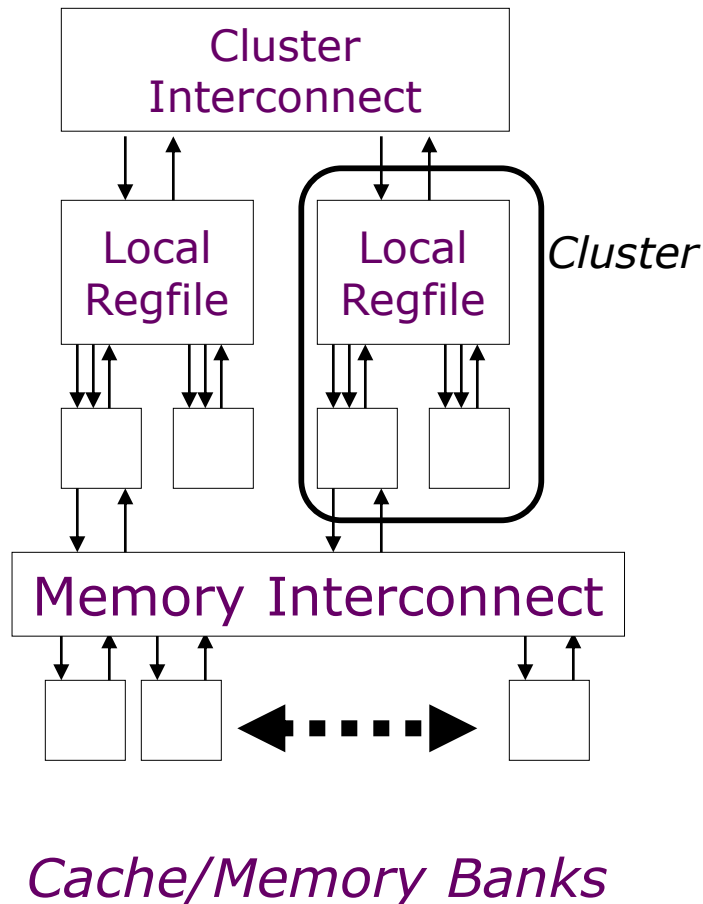

- Divide machine into clusters of local register files and local functional units
- Lower bandwidth/higher latency interconnect between clusters
- Software responsible for mapping computations to minimize communication overhead
- Common in commercial embedded processors, examples include TI C6x series DSPs, and HP Lx processor
- Exists in some superscalar processors, e.g., Alpha 21264

Limits of Static Scheduling

- Unpredictable branches
- Unpredictable memory behavior
(cache misses and dependencies)
- Code size explosion
- Compiler complexity

Limits of Static Scheduling

- Unpredictable branches
- Unpredictable memory behavior (cache misses and dependencies)
- Code size explosion
- Compiler complexity

Question:

How applicable are the VLIW-inspired techniques to traditional RISC/CISC processor architectures?

Thank you!

Next Lecture: Vector Processors