




What does this  
WW2 poster  
have in common  
with pipelined  
processors?



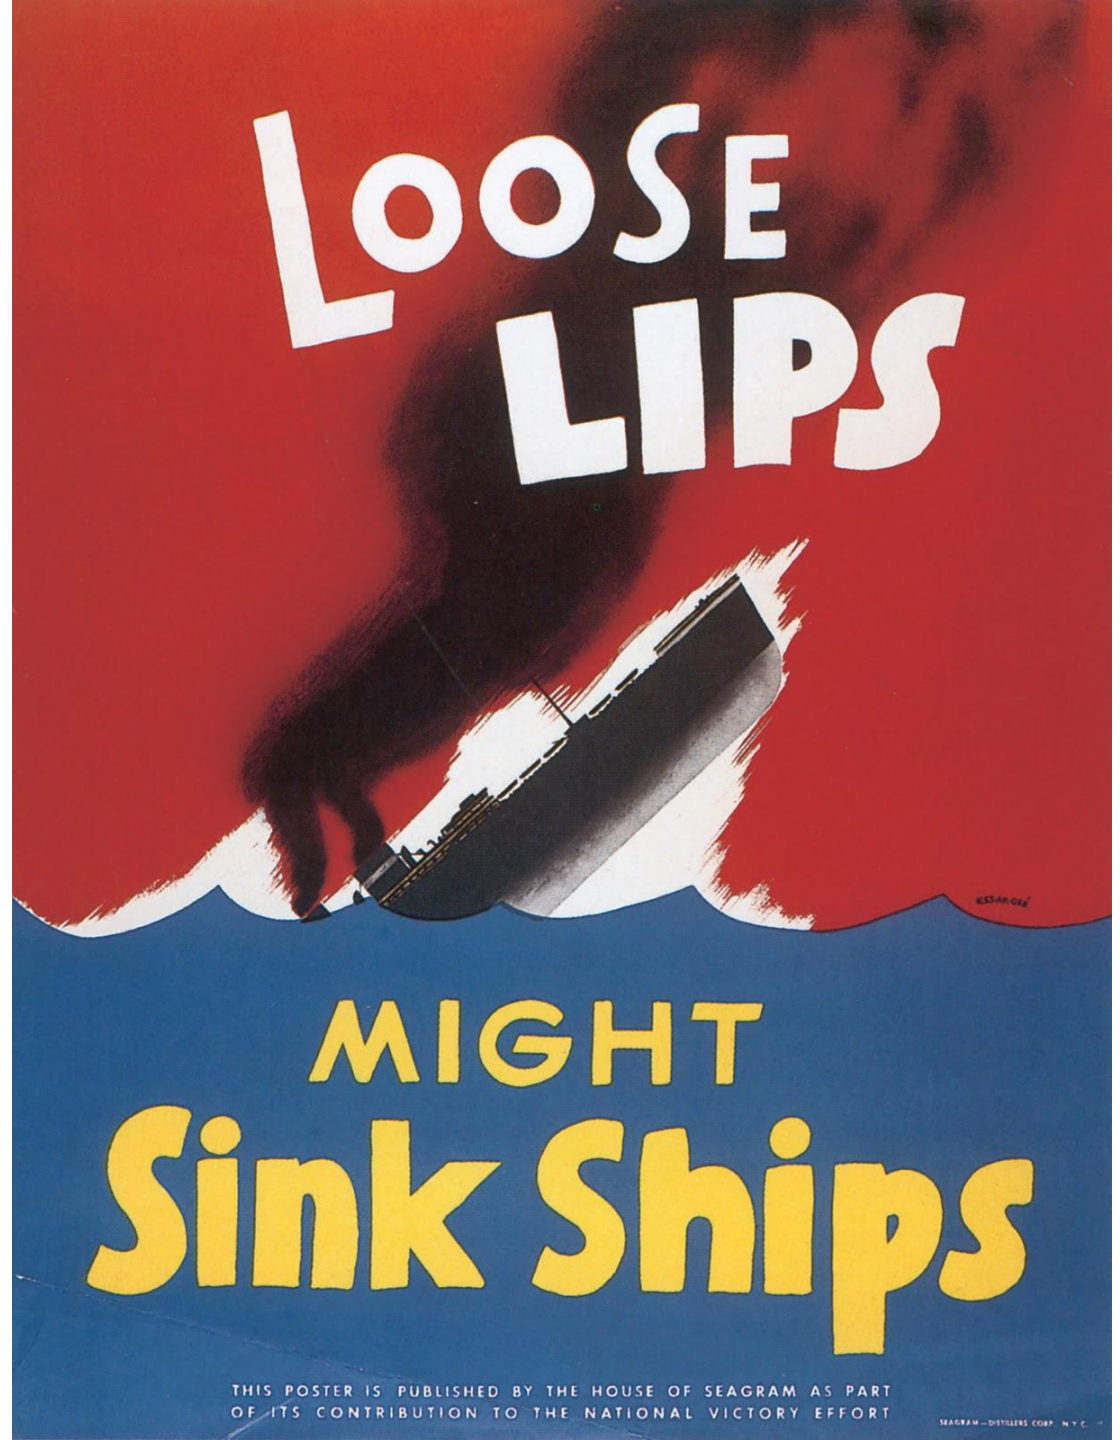

What does this  
WW2 poster  
have in common  
with pipelined  
processors?





What does this  
WW2 poster  
have in common  
with pipelined  
processors?





# Speculative Execution

*Daniel Sanchez*

Computer Science and Artificial Intelligence Laboratory  
M.I.T.

<http://www.csg.csail.mit.edu/6.823>

# Speculative Execution Recipe

---

1. Proceed ahead despite unresolved dependencies using a prediction for an architectural or micro-architectural value



2. Maintain both old and new values on updates to architectural (and often micro-architectural) state.



3. After sure that there was no mis-speculation and there will be no more uses of the old values, discard old values and just use new values.

OR

3. In event of mis-speculation dispose of all new values, restore old values and re-execute from point before mis-speculation

Why might one use old values?

# Speculative Execution Recipe

---

1. Proceed ahead despite unresolved dependencies using a prediction for an architectural or micro-architectural value



2. Maintain both old and new values on updates to architectural (and often micro-architectural) state.



3. After sure that there was no mis-speculation and there will be no more uses of the old values, discard old values and just use new values.

OR

3. In event of mis-speculation dispose of all new values, restore old values and re-execute from point before mis-speculation

Why might one use old values?

O-O-O WAR hazards

# Value Management Strategies

---

# Value Management Strategies

---

## Greedy (or Eager) Update:

- Update value in place, and
- Maintain a log of old values to use for recovery.



# Value Management Strategies

---

## Greedy (or Eager) Update:

- Update value in place, and
- Maintain a log of old values to use for recovery.

## Lazy Update:

- Buffer new value leaving old value in place.
- Replace old value only at 'commit' time.

# Value Management Strategies

---

## Greedy (or Eager) Update:

- Update value in place, and
- Maintain a log of old values to use for recovery.

## Lazy Update:

- Buffer new value leaving old value in place.
- Replace old value only at 'commit' time.

Why leave an old value in place?

# Value Management Strategies

---

## Greedy (or Eager) Update:

- Update value in place, and
- Maintain a log of old values to use for recovery.


## Lazy Update:

- Buffer new value leaving old value in place.
- Replace old value only at 'commit' time.

## Why leave an old value in place?

- Old value can be used after new value is generated
- Simplified recovery


# Exception Handling (In-Order Five-Stage Pipeline)

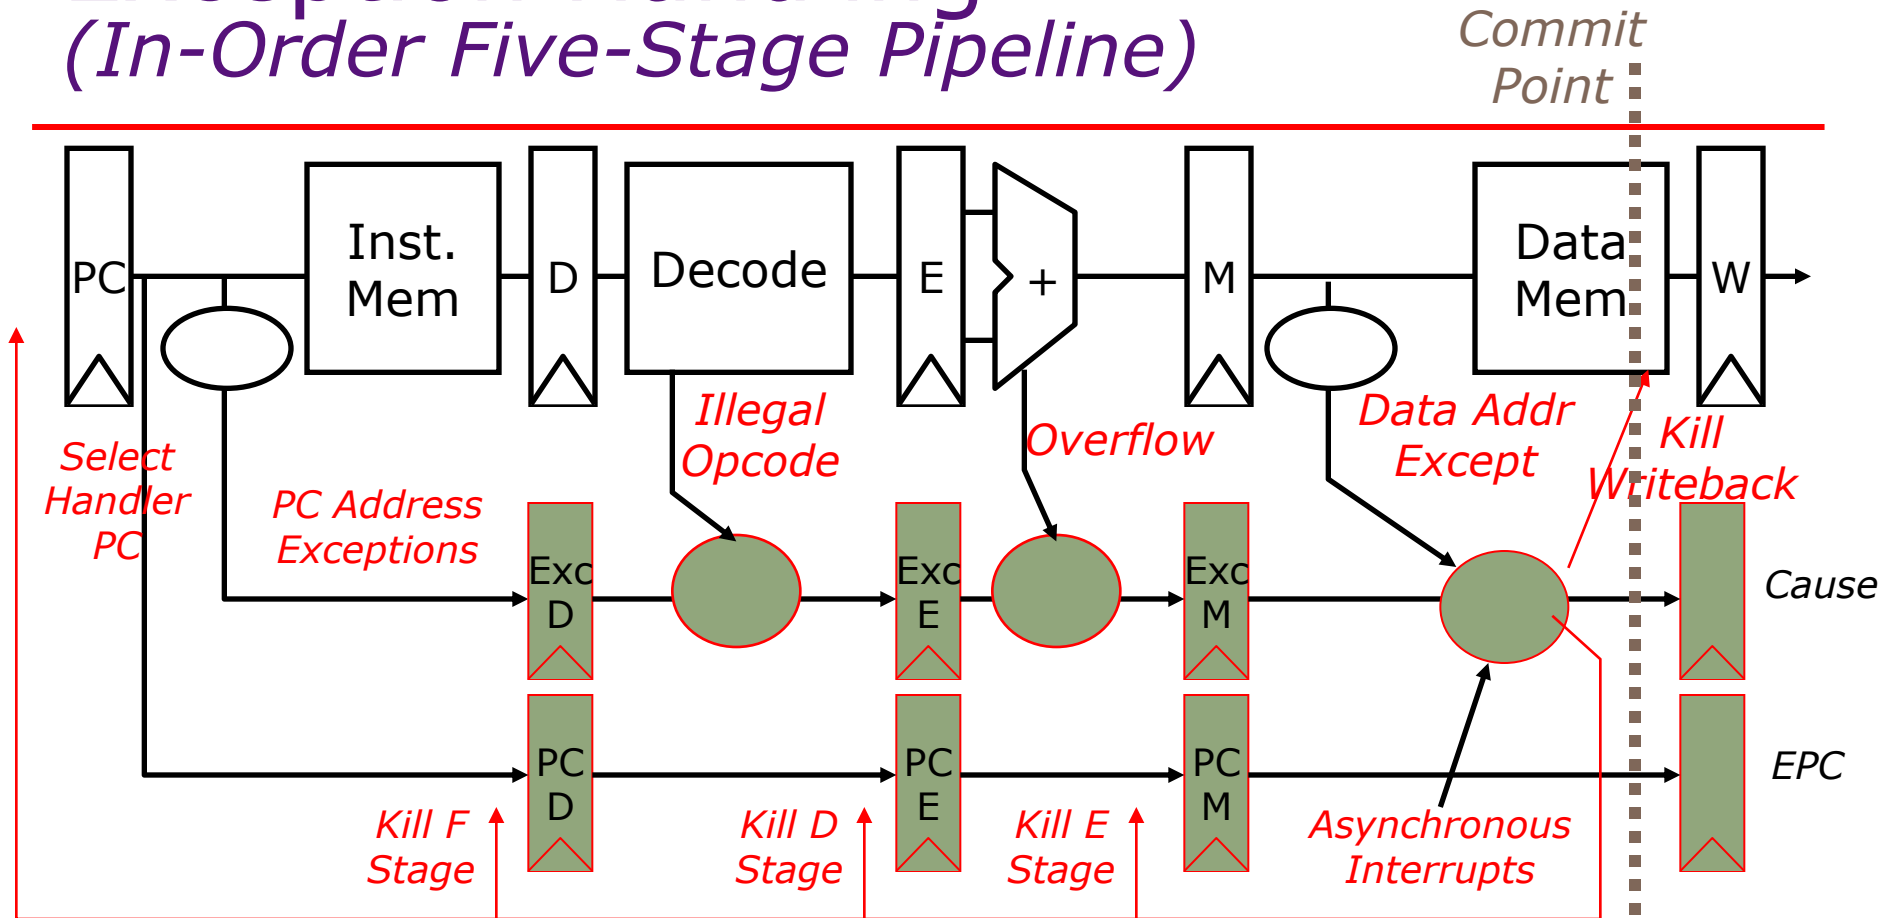

Strategy for PC?

Strategy for Registers?

# Exception Handling (In-Order Five-Stage Pipeline)

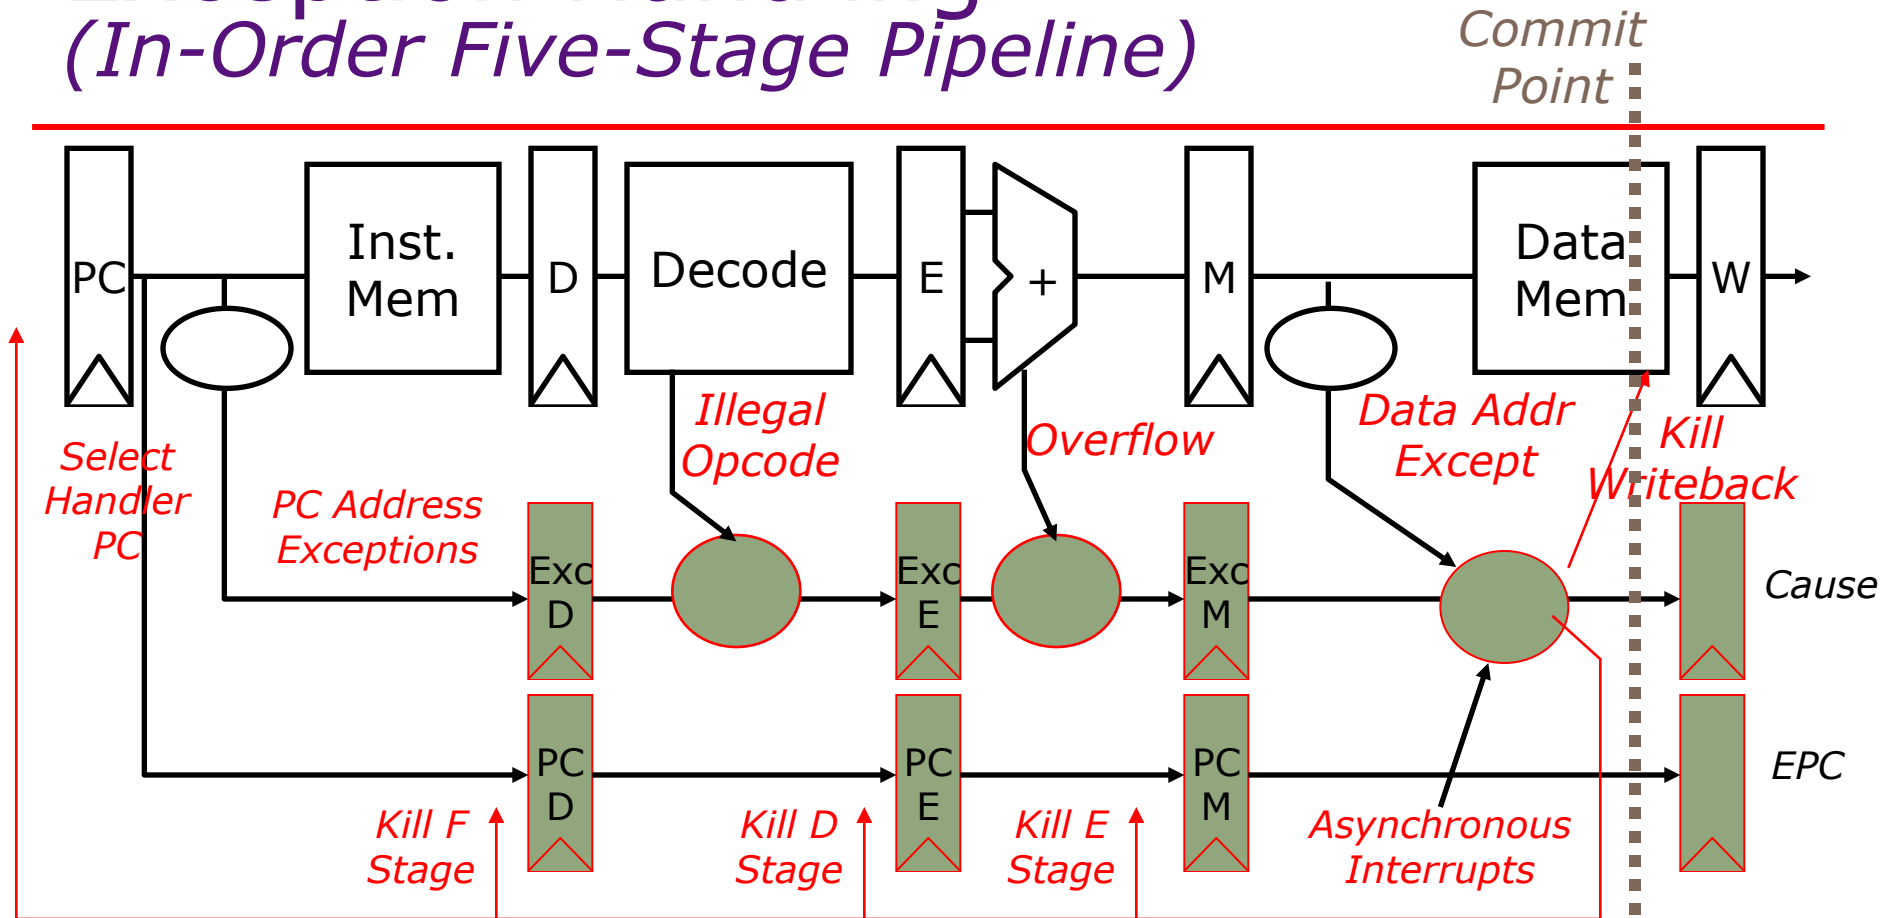


Strategy for PC?

Greedy – update immediately

Strategy for Registers?

# Exception Handling (In-Order Five-Stage Pipeline)

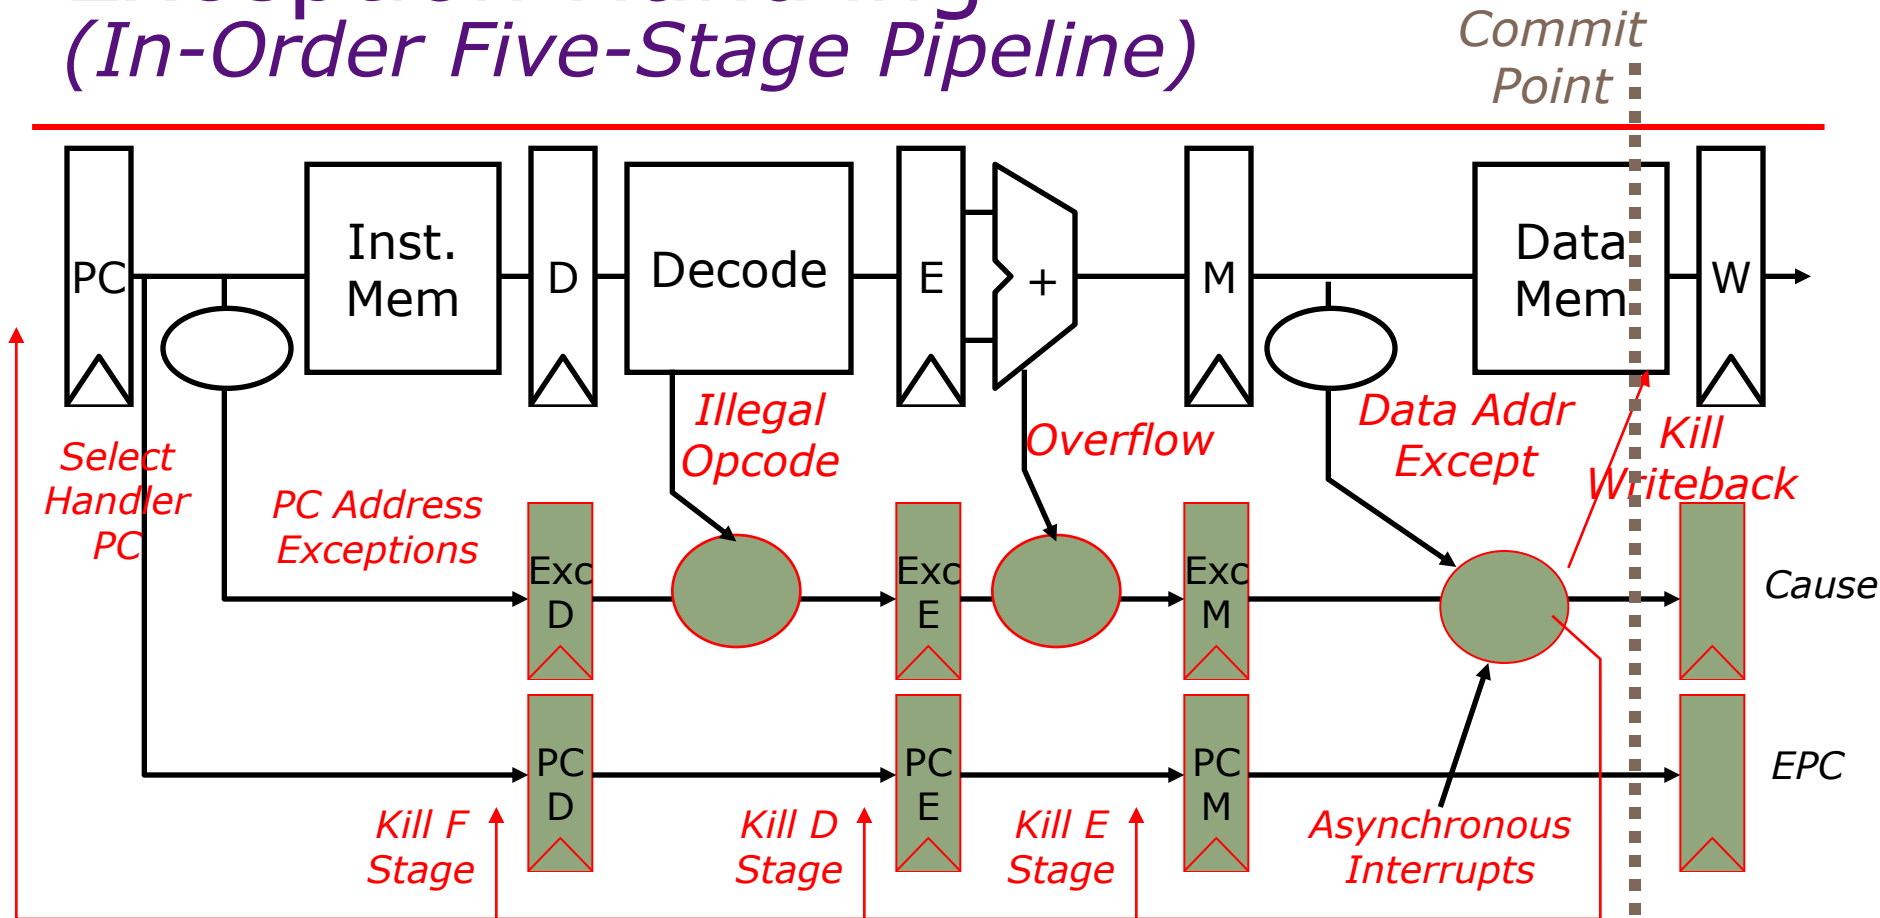

Strategy for PC?

Greedy – update immediately

Strategy for Registers?

Lazy – update at commit

# Misprediction Recovery

---

## In-order execution machines:

- Guarantee no instruction issued after branch can write-back before branch resolves by keeping values in the pipeline
- Kill all values from all instructions in pipeline behind mispredicted branch

# Misprediction Recovery

---

## In-order execution machines:

- Guarantee no instruction issued after branch can write-back before branch resolves by keeping values in the pipeline
- Kill all values from all instructions in pipeline behind mispredicted branch

## Out-of-order execution?



# Misprediction Recovery

---

## In-order execution machines:

- Guarantee no instruction issued after branch can write-back before branch resolves by keeping values in the pipeline
- Kill all values from all instructions in pipeline behind mispredicted branch


## Out-of-order execution?

- Multiple instructions following branch in program order can generate new values before branch resolves

# Data-Driven Execution

*Renaming  
table &  
reg file*

*Reorder  
buffer*

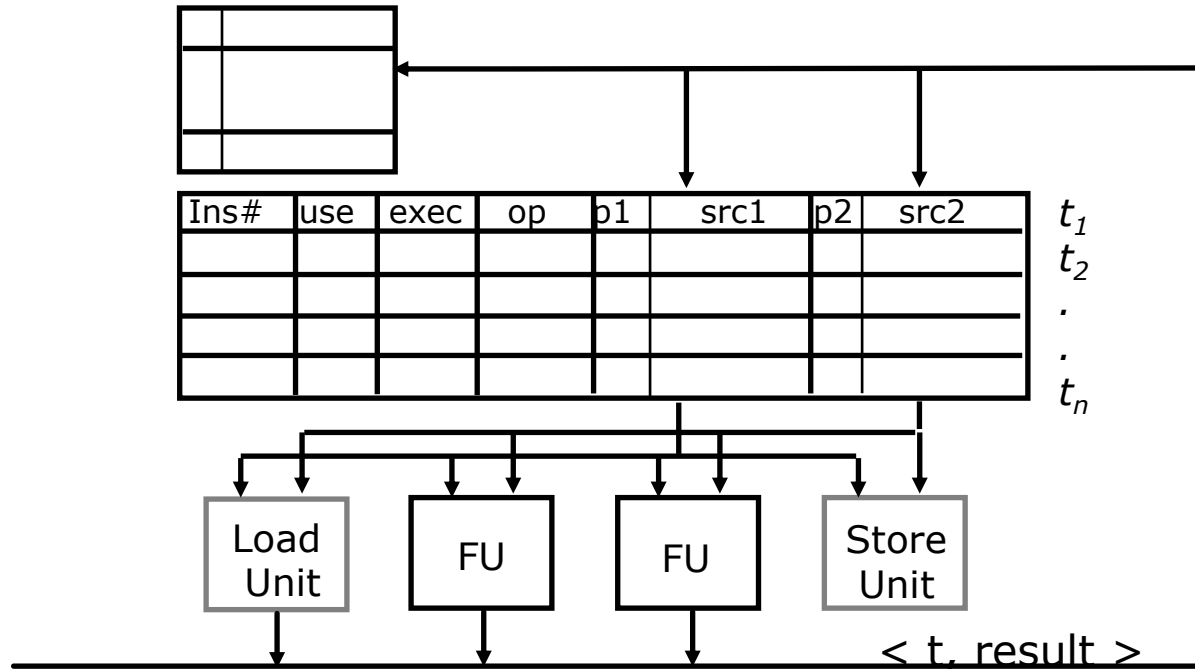


Basic Operation:

- Enter op and tag or data (if known) for each source
- Replace tag with data as it becomes available
- Issue instruction when all sources are available
- Save dest data when operation finishes

# Rollback and Renaming


Register File  
(now holds only committed state)

Reorder buffer

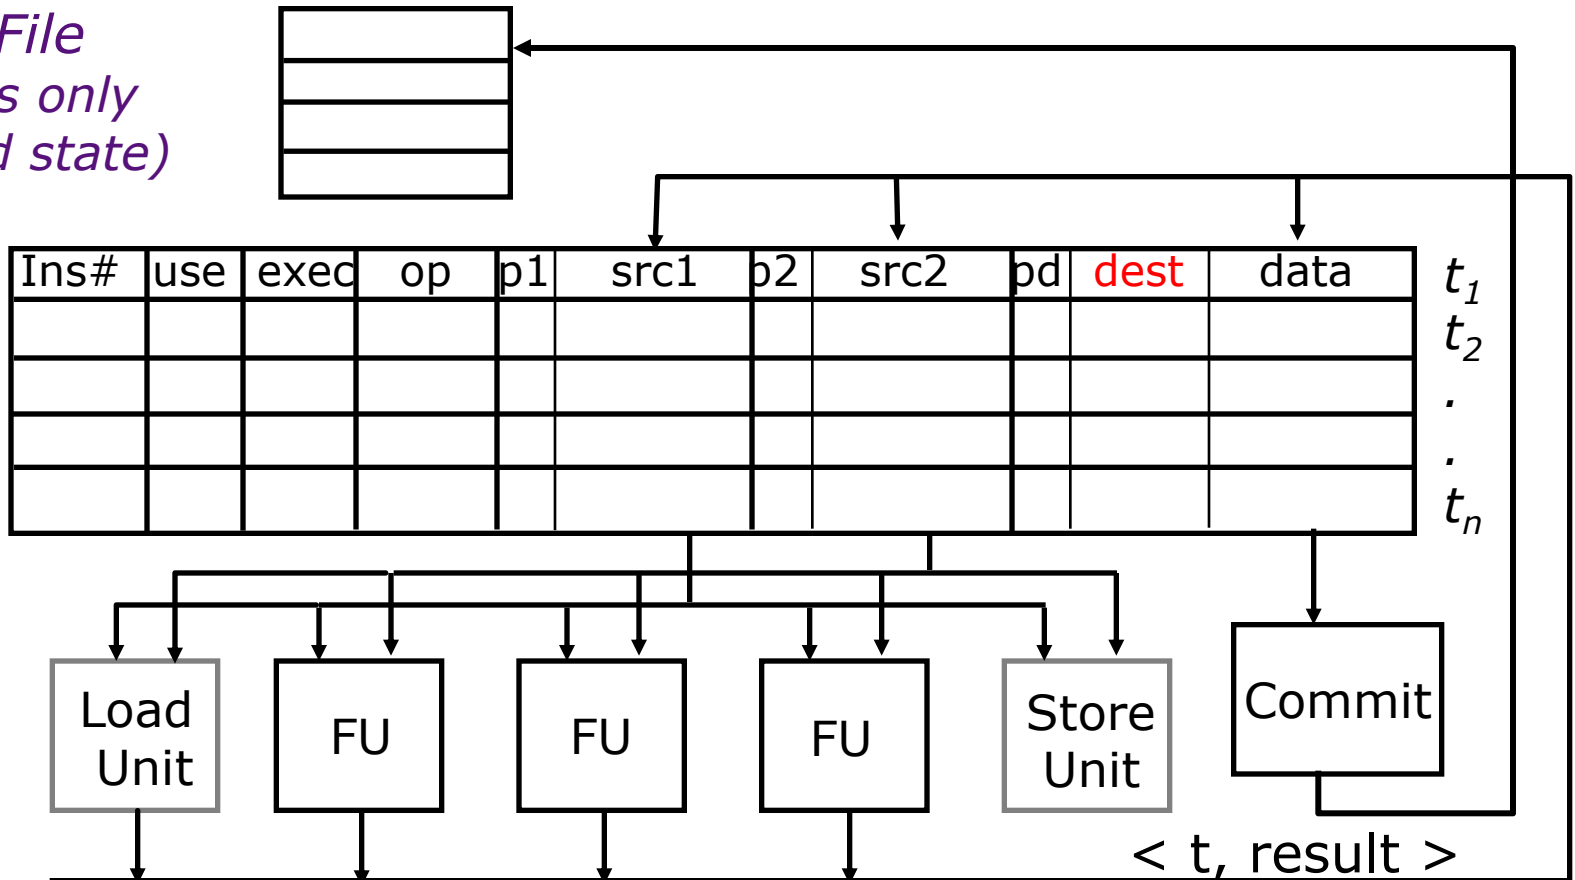

Register file does not contain renaming tags any more.  
How does the decode stage find the tag of a source register?


# Rollback and Renaming

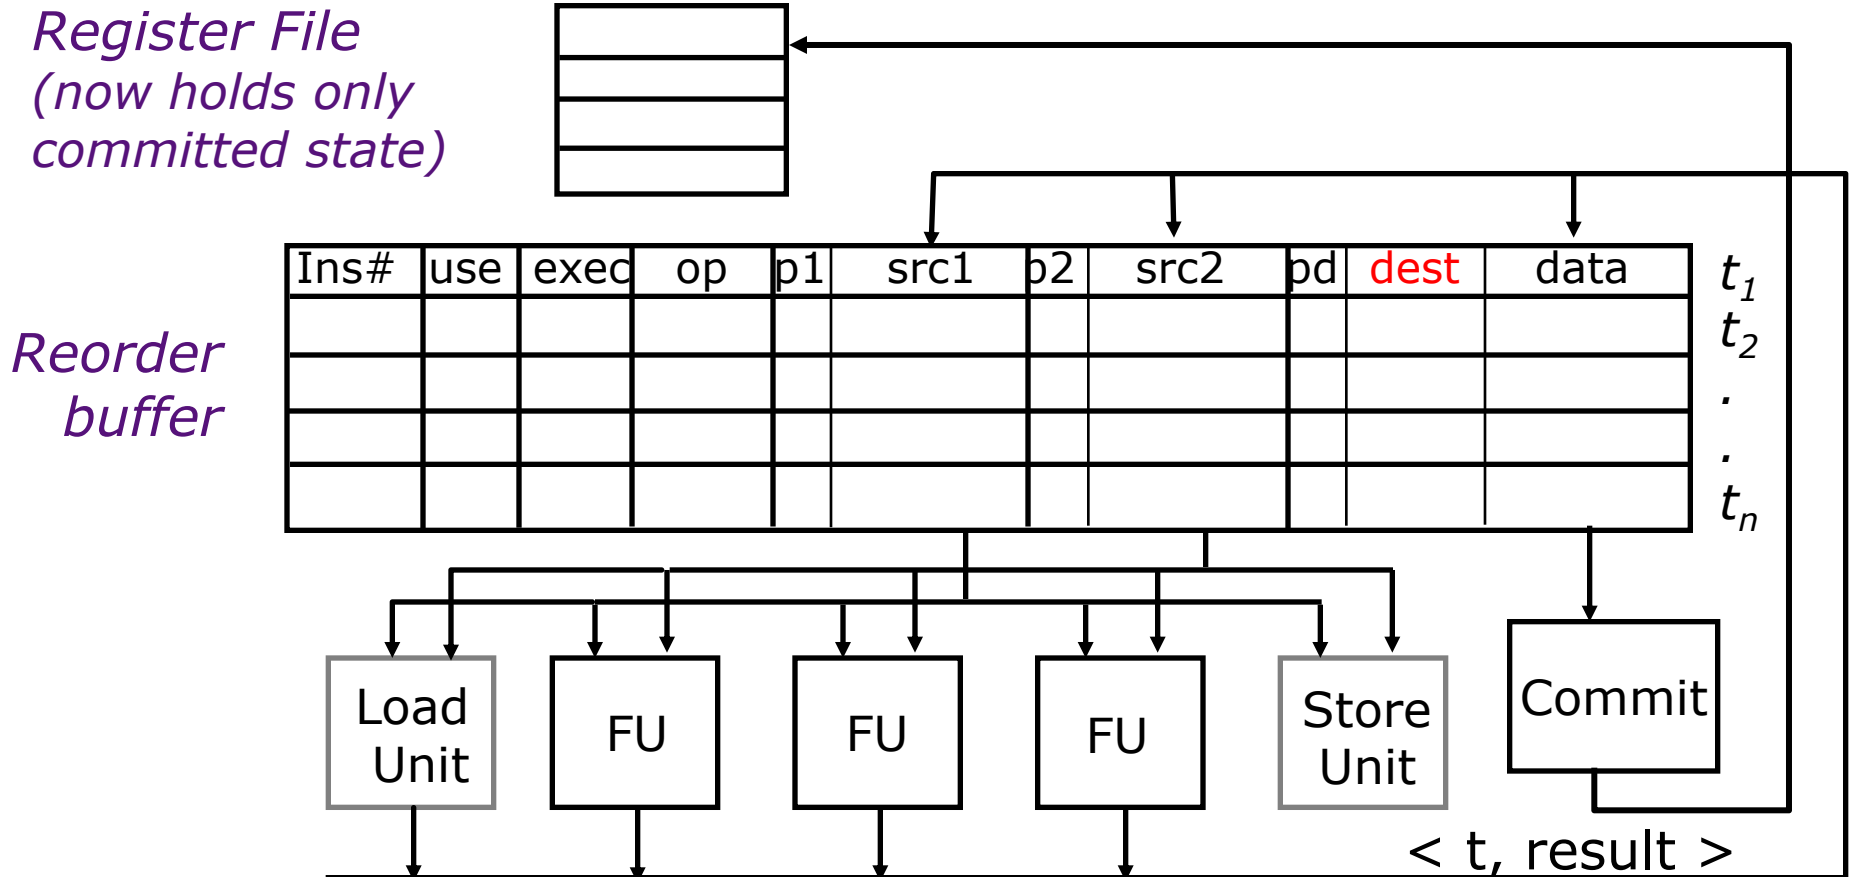

Register file does not contain renaming tags any more.  
*How does the decode stage find the tag of a source register?*

*Search the "dest" field in the reorder buffer*

# Renaming Table

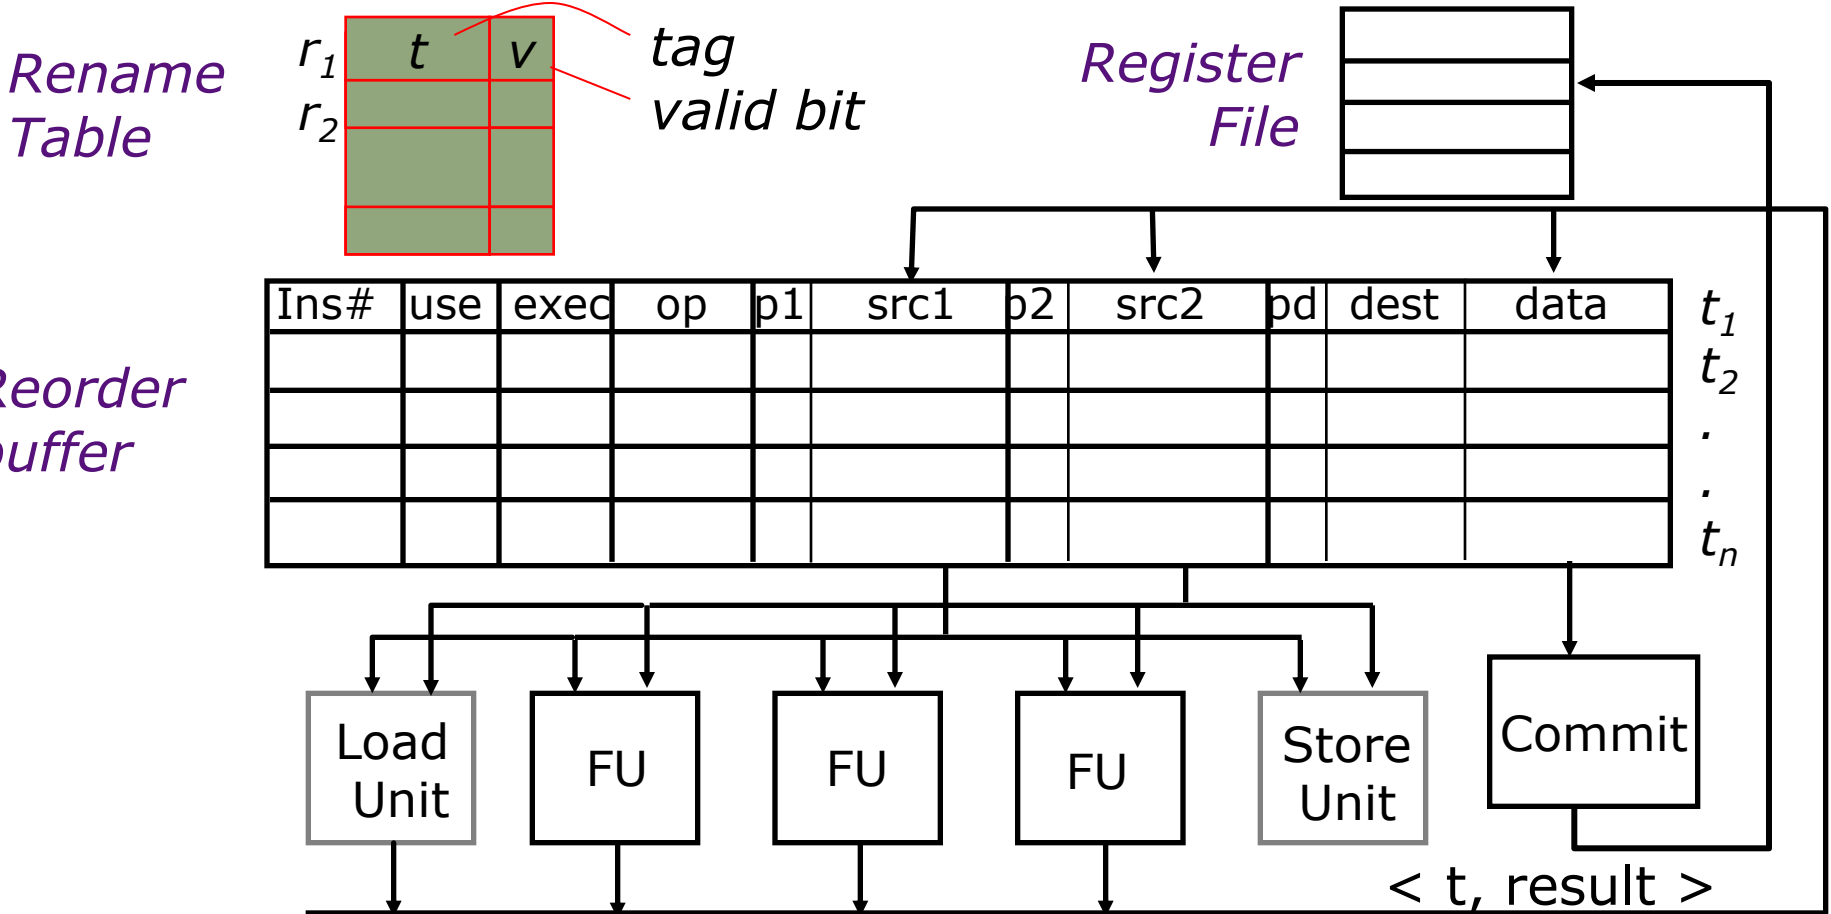


Renaming table is a cache to speed up register name look up.

Valid bits are cleared on exceptions and when else?

After being cleared, when can instructions be added to ROB?

# Renaming Table

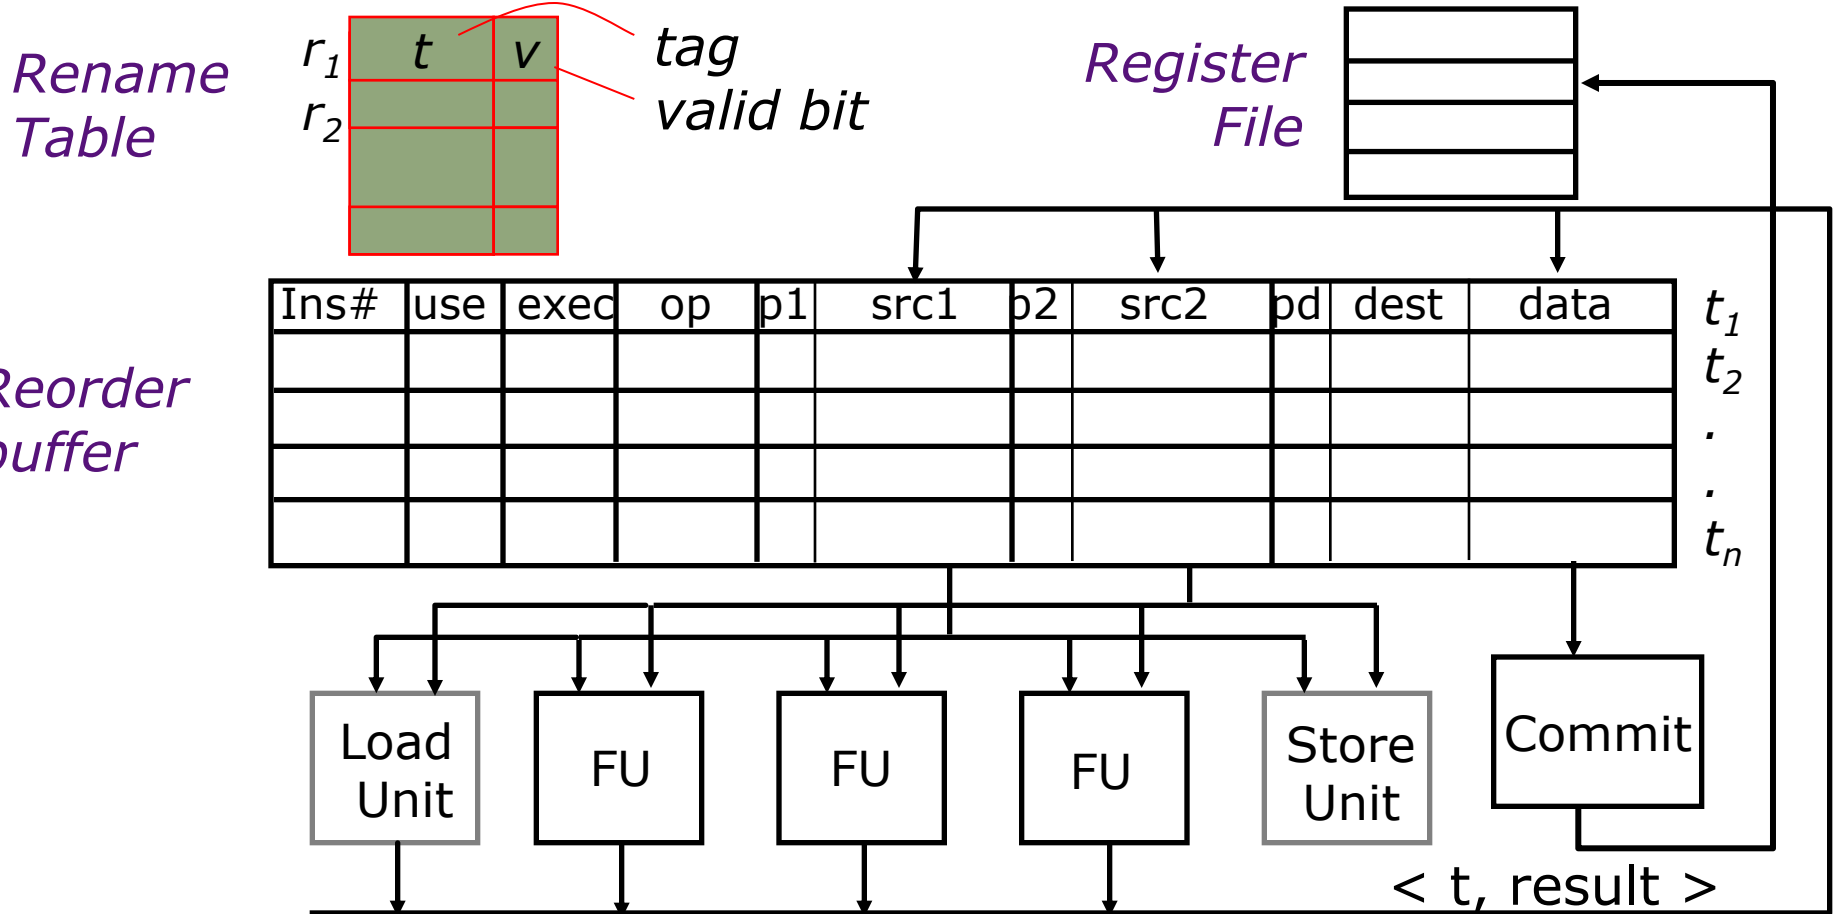


Renaming table is a cache to speed up register name look up.

Valid bits are cleared on exceptions and when else?

*Branch mispredicts*

After being cleared, when can instructions be added to ROB?

# Renaming Table

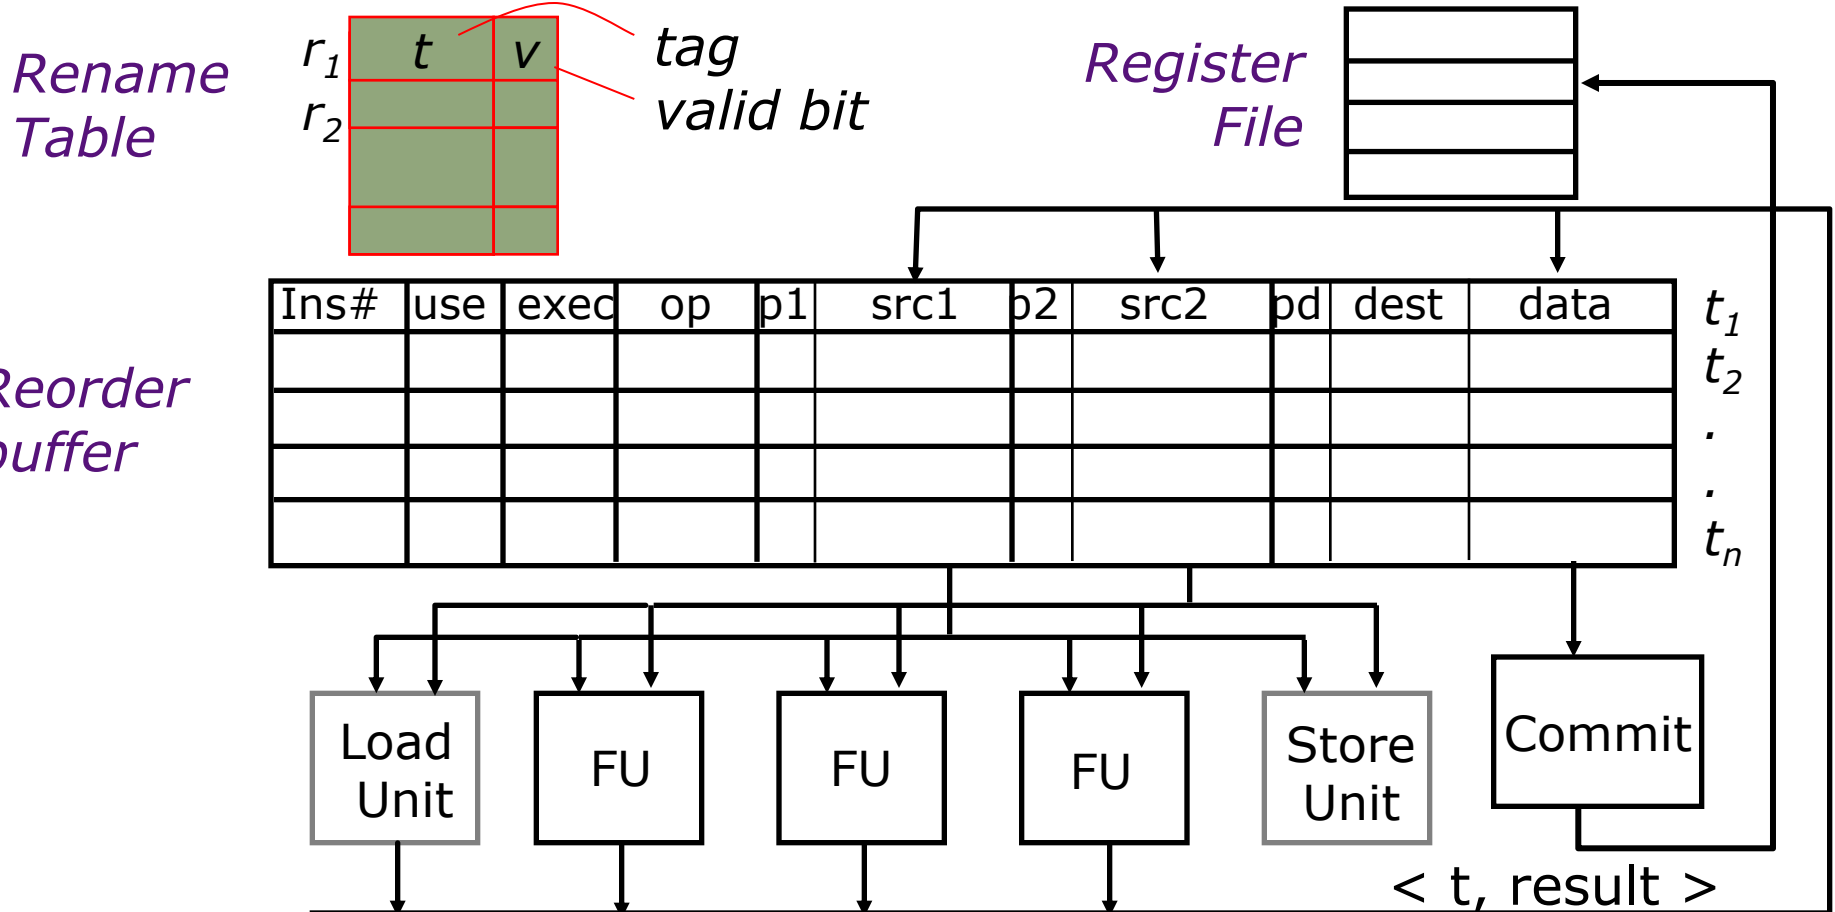

Renaming table is a cache to speed up register name look up.


Valid bits are cleared on exceptions and when else?

*Branch mispredicts*

After being cleared, when can instructions be added to ROB?


*After drain*

# Recovering ROB/Renaming Table

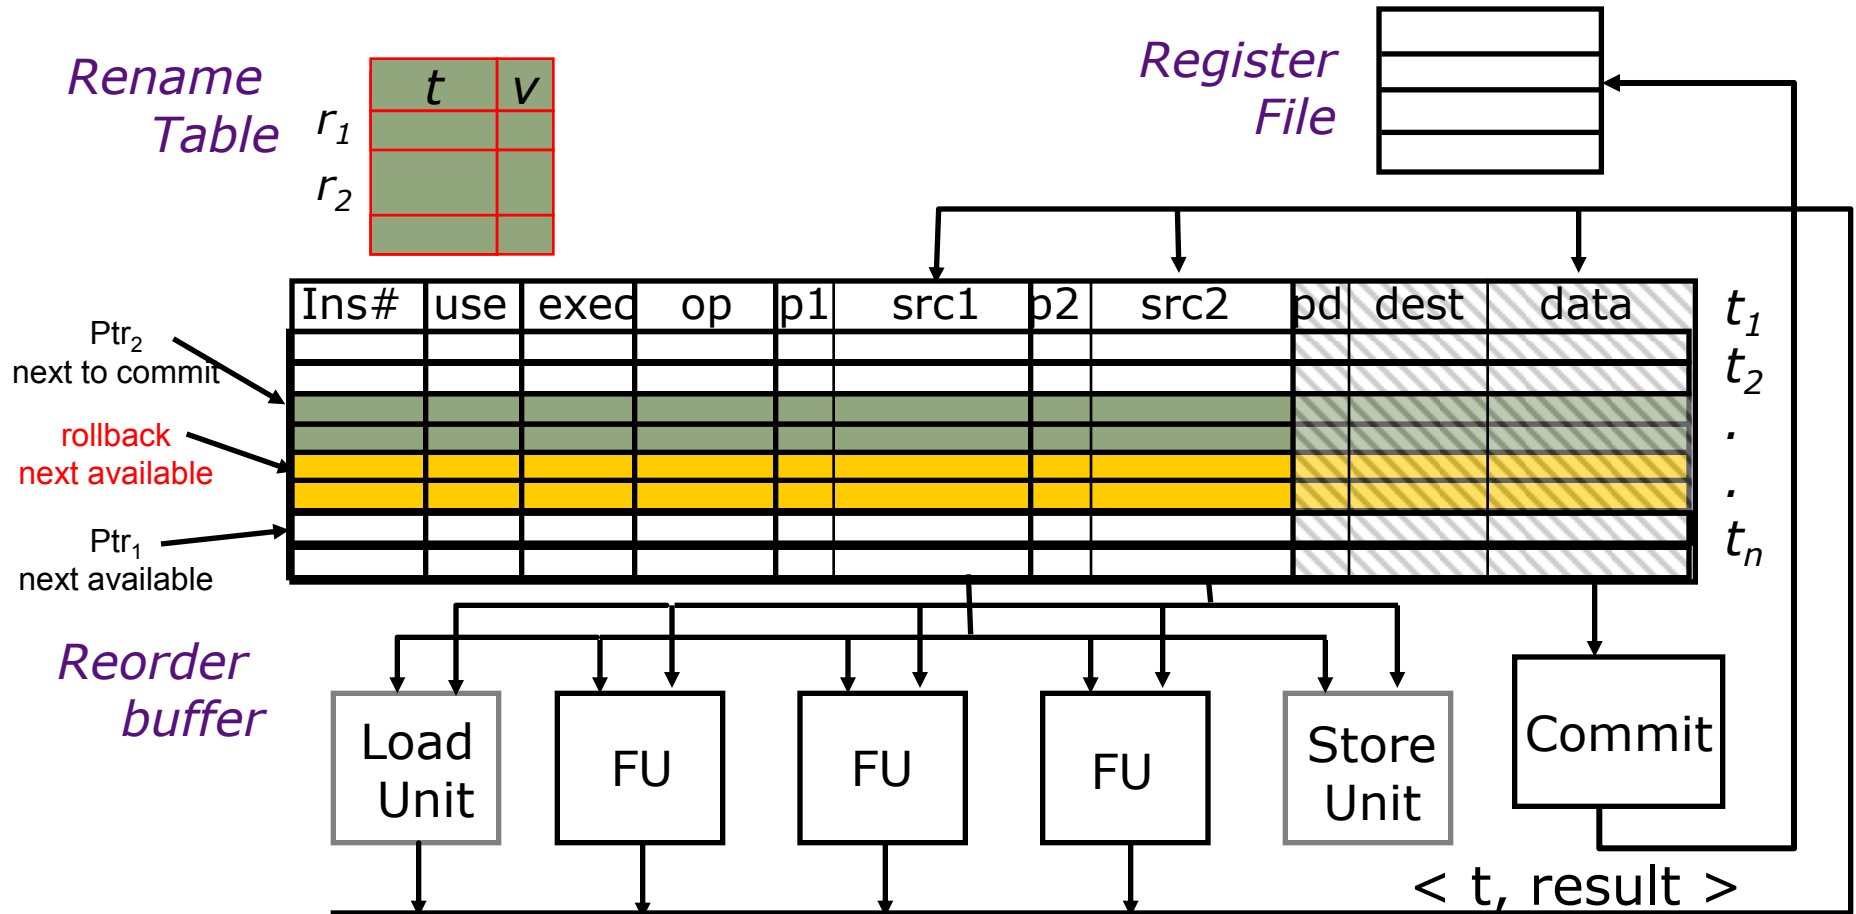




# Recovering ROB/Renaming Table

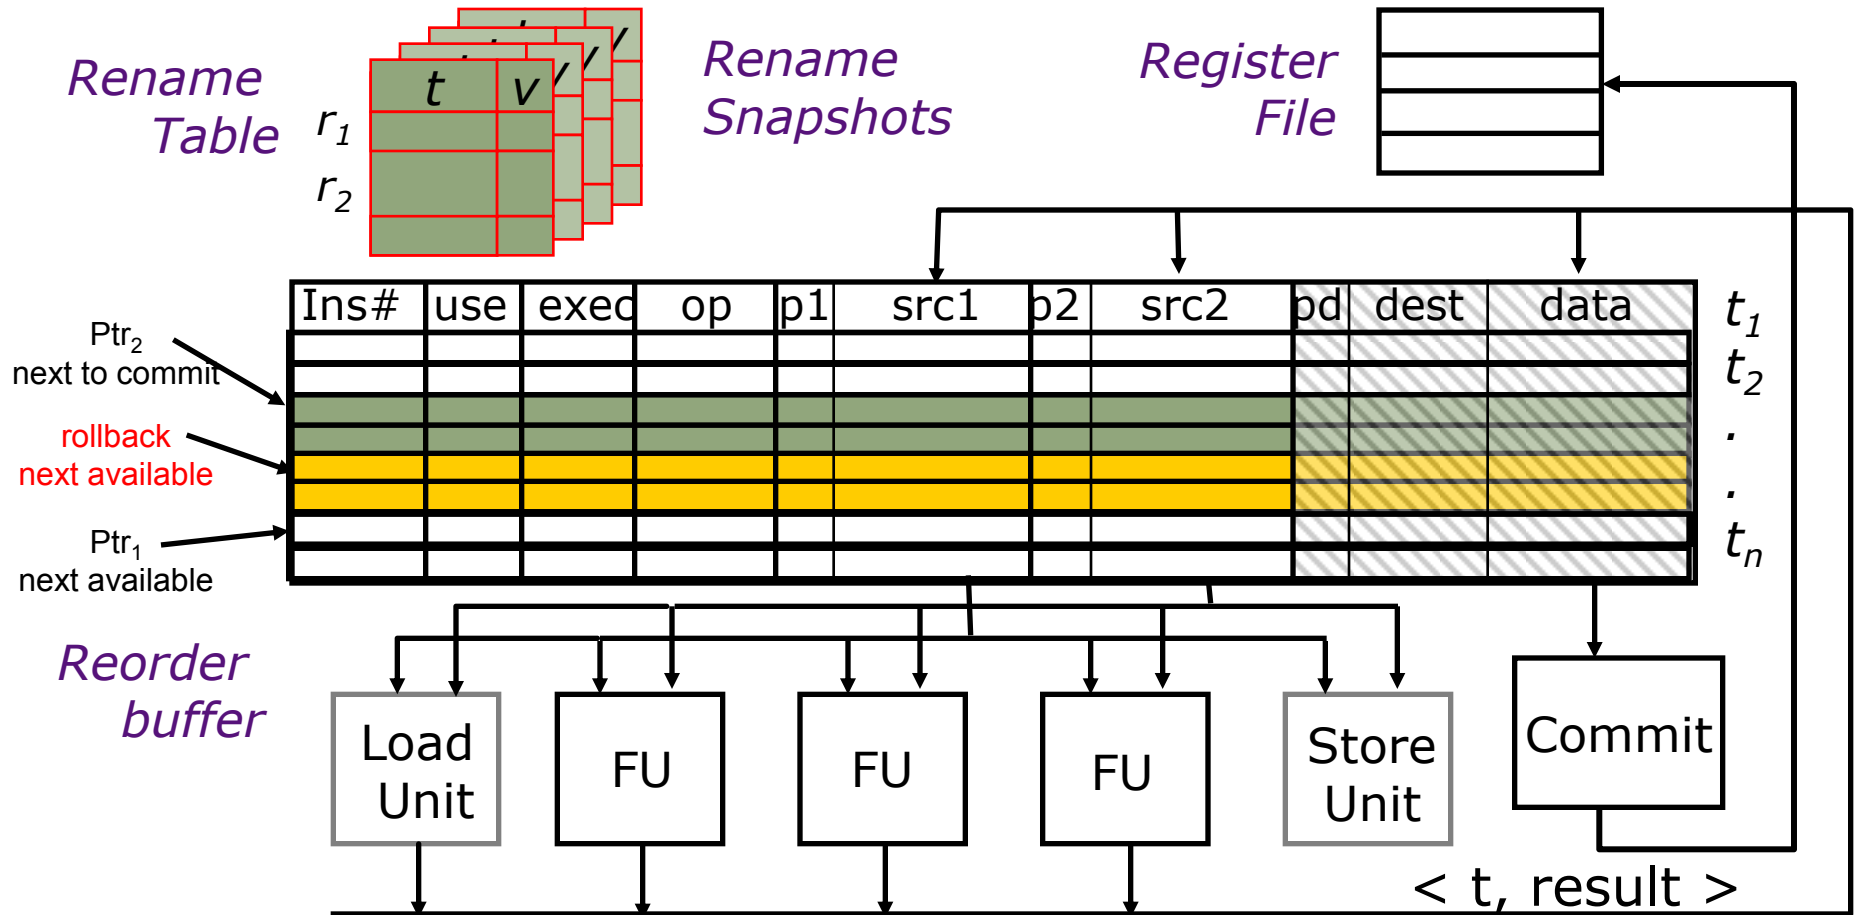

# Recovering ROB/Renaming Table

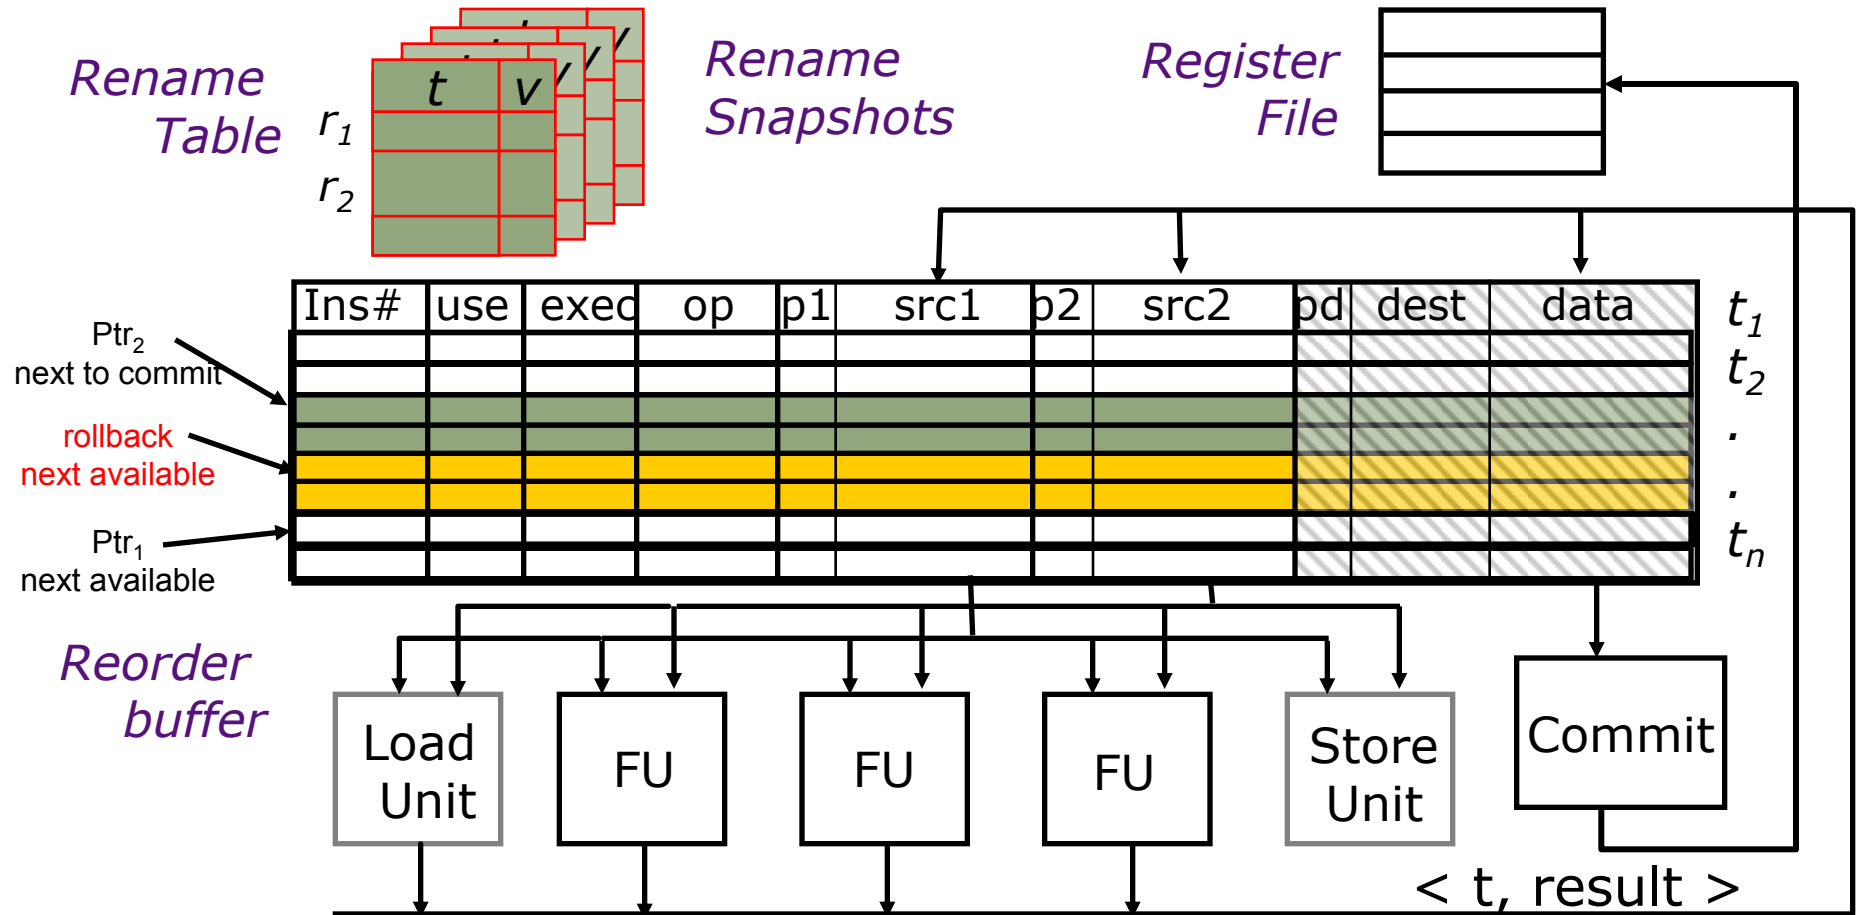

Take snapshot of register rename table at each predicted branch, recover earlier snapshot if branch mispredicted

# Map Table Recovery - Snapshots

---

Speculative value management of microarchitectural state

	Reg Map	V
R0	T20	X
R1	T08	
R2	T45	X
R3	T128	X
	•	
	•	
	•	
R30	T54	
R31	T88	X

# Map Table Recovery - Snapshots

---

Speculative value management of microarchitectural state

	Reg Map	V
R0	T20	X
R1	T08	
R2	T45	X
R3	T128	X
	⋮	
R30	T54	
R31	T88	X

	Snap Map	V
	T20	X
	T08	
	T45	X
	T128	X
	⋮	
	T54	
	T88	X

# Map Table Recovery - Snapshots

---

Speculative value management of microarchitectural state

	Reg Map	V
R0	T20	X
R1	T73	X
R2	T45	X
R3	T128	X
	⋮	
R30	T54	
R31	T88	X

	Snap Map	V
	T20	X
	T08	
	T45	X
	T128	X
	⋮	
	T54	
	T88	X

# Map Table Recovery - Snapshots

---

Speculative value management of microarchitectural state

	Reg Map	V
R0	T20	X
R1	T73	X
R2	T45	X
R3	T128	
	⋮	
R30	T54	
R31	T88	X

	Snap Map	V
	T20	X
	T08	
	T45	X
	T128	X
	⋮	
	T54	
	T88	X

# Map Table Recovery - Snapshots

Speculative value management of microarchitectural state

	Reg Map	V	Snap Map	V	Snap Map	V
R0	T20	X	T20	X	T20	X
R1	T73	X	T73	X	T08	
R2	T45	X	T45	X	T45	X
R3	T128		T128		T128	X
	⋮		⋮		⋮	
R30	T54		T54		T54	
R31	T88	X	T88	X	T88	X

# Map Table Recovery - Snapshots

Speculative value management of microarchitectural state

	Reg Map	V	Snap Map	V	Snap Map	V
R0	T20	X	T20	X	T20	X
R1	T73	X	T73	X	T08	
R2	T45	X	T45	X	T45	X
R3	T128		T128		T128	X
	⋮		⋮		⋮	
R30	T54		T54		T54	
R31	T88	X	T88	X	T88	X

What kind of value management is this?



# Map Table Recovery - Snapshots

Speculative value management of microarchitectural state


	Reg Map	V	Snap Map	V	Snap Map	V
R0	T20	X	T20	X	T20	X
R1	T73	X	T73	X	T08	
R2	T45	X	T45	X	T45	X
R3	T128		T128		T128	X
	⋮		⋮		⋮	
R30	T54		T54		T54	
R31	T88	X	T88	X	T88	X

What kind of value management is this?

**Greedy!!**

# Branch Predictor Recovery


---



# Branch Predictor Recovery

---


- 1-Bit Counter Recovery

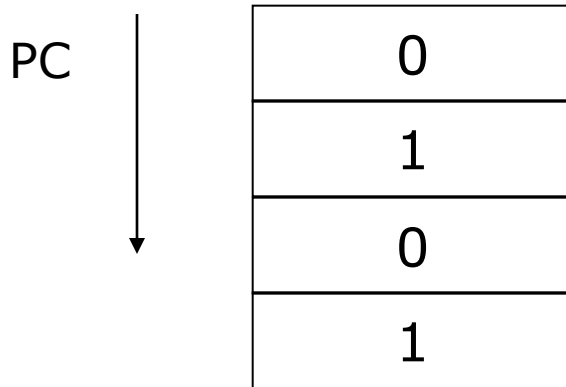

# Branch Predictor Recovery

---


- 1-Bit Counter Recovery

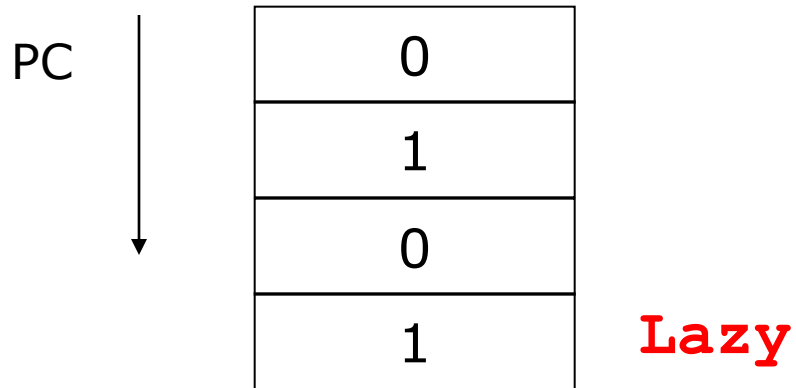


# Branch Predictor Recovery

---

- 1-Bit Counter Recovery

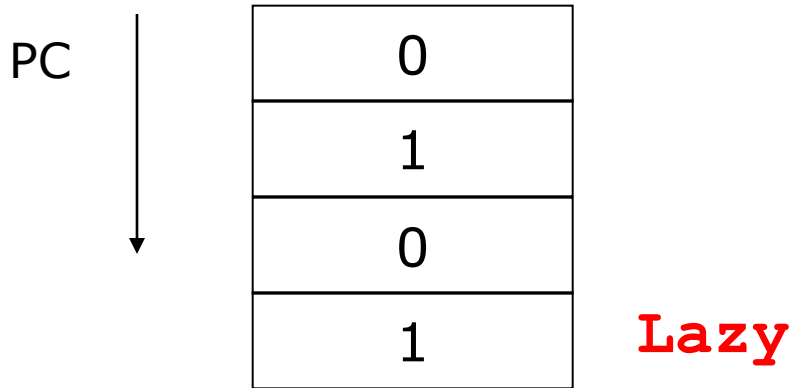


- 2-Bit Counter Recovery

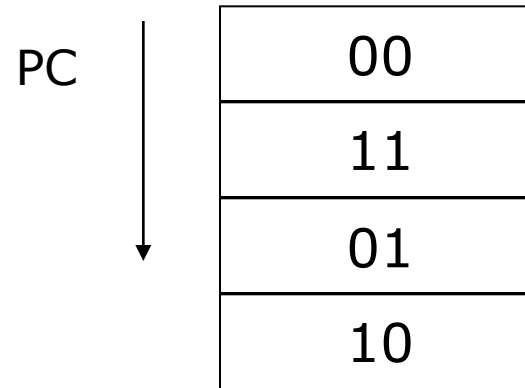


# Branch Predictor Recovery

---

- 1-Bit Counter Recovery

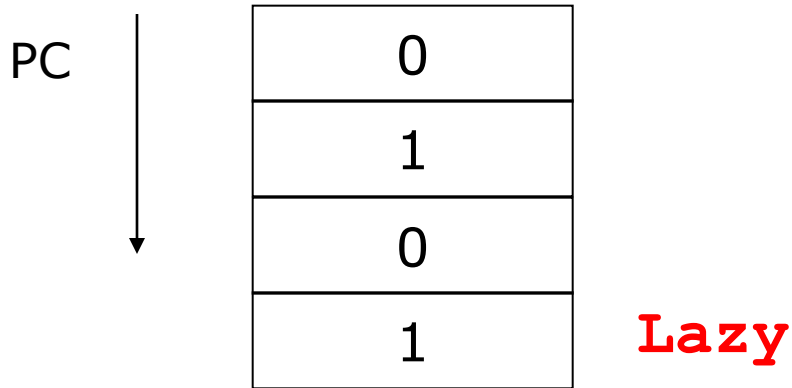


- 2-Bit Counter Recovery

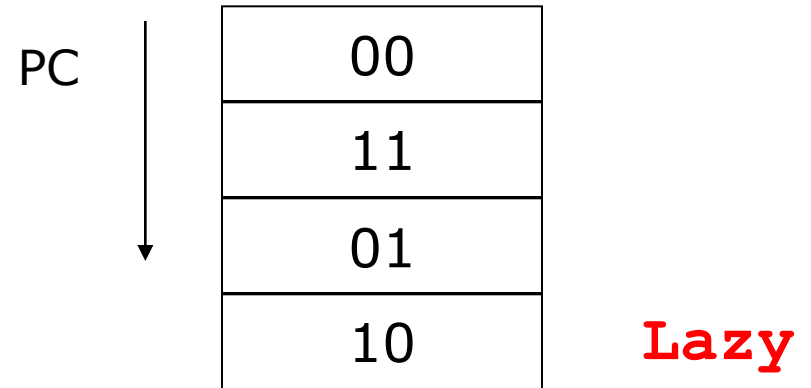


# Branch Predictor Recovery

---

- 1-Bit Counter Recovery

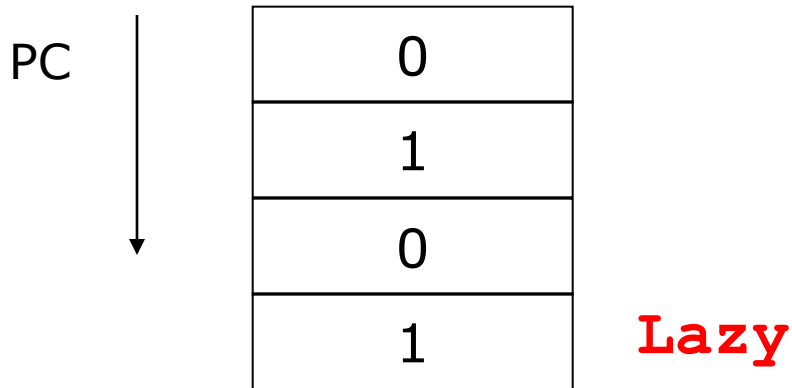

- 2-Bit Counter Recovery

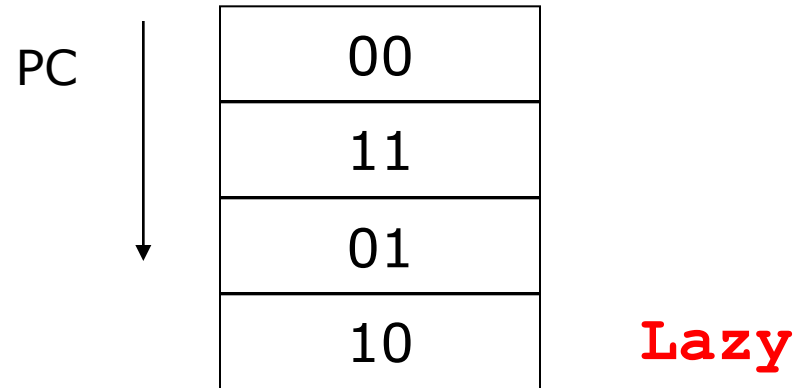


- Global History Recovery


10101010

# Branch Predictor Recovery


- 1-Bit Counter Recovery

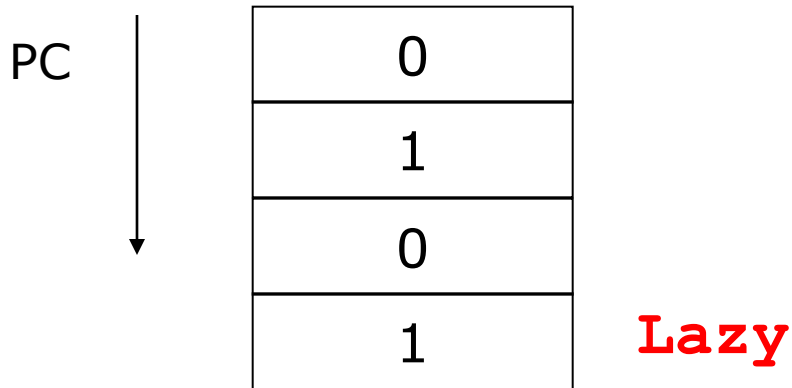

- 2-Bit Counter Recovery

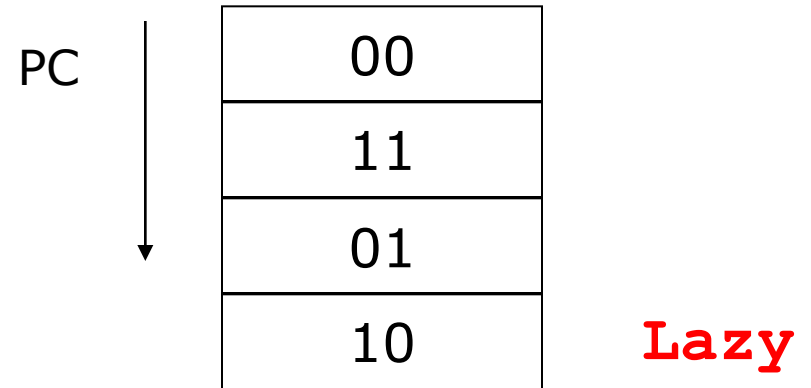


- Global History Recovery

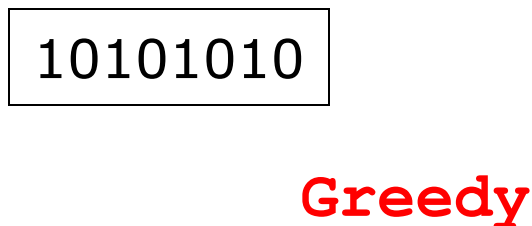




# Branch Predictor Recovery

- 1-Bit Counter Recovery

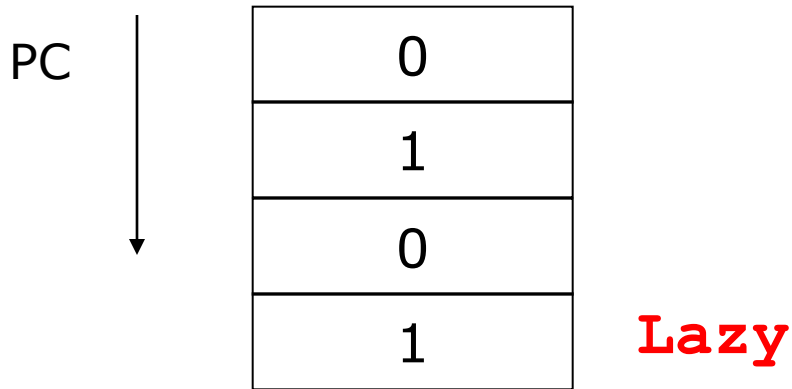

- 2-Bit Counter Recovery

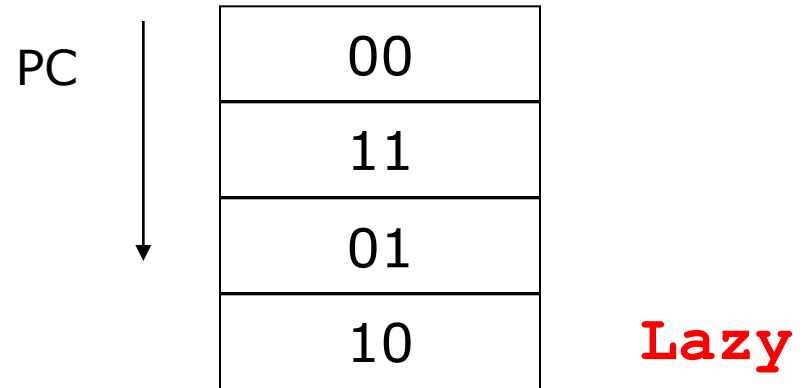


- Global History Recovery

10101010


**Greedy**

- Local History Recovery

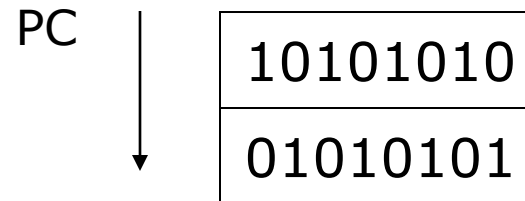


# Branch Predictor Recovery


- 1-Bit Counter Recovery

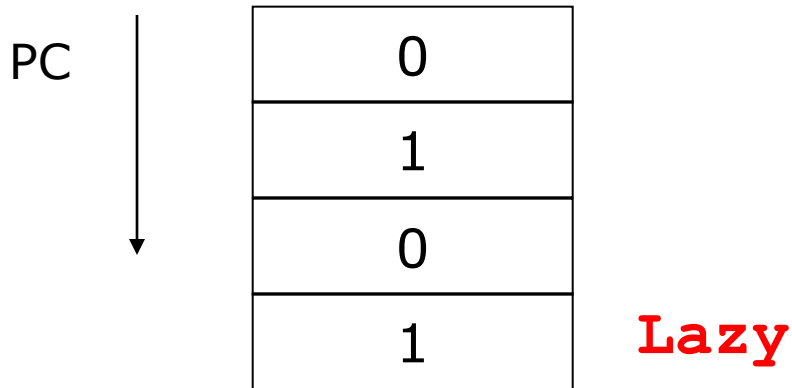


- 2-Bit Counter Recovery

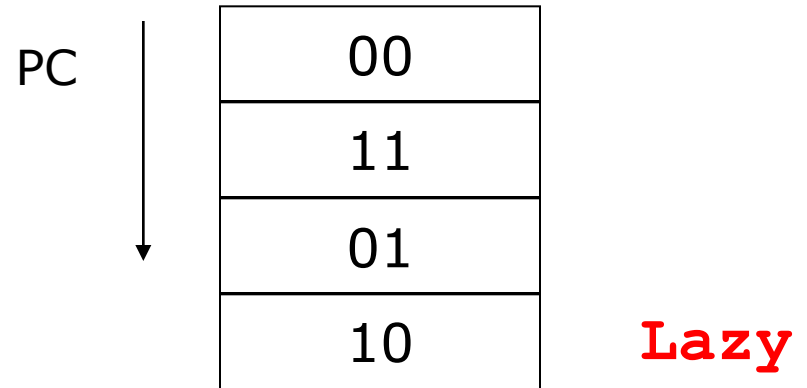


- Global History Recovery

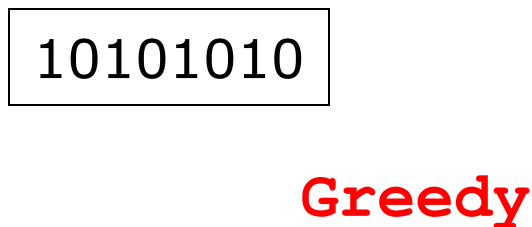

- Local History Recovery

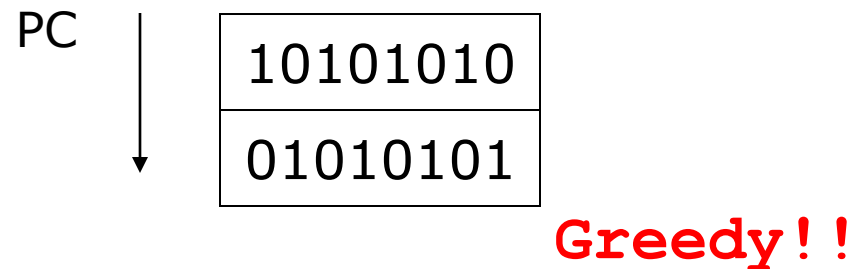

# O-o-O Execution with ROB

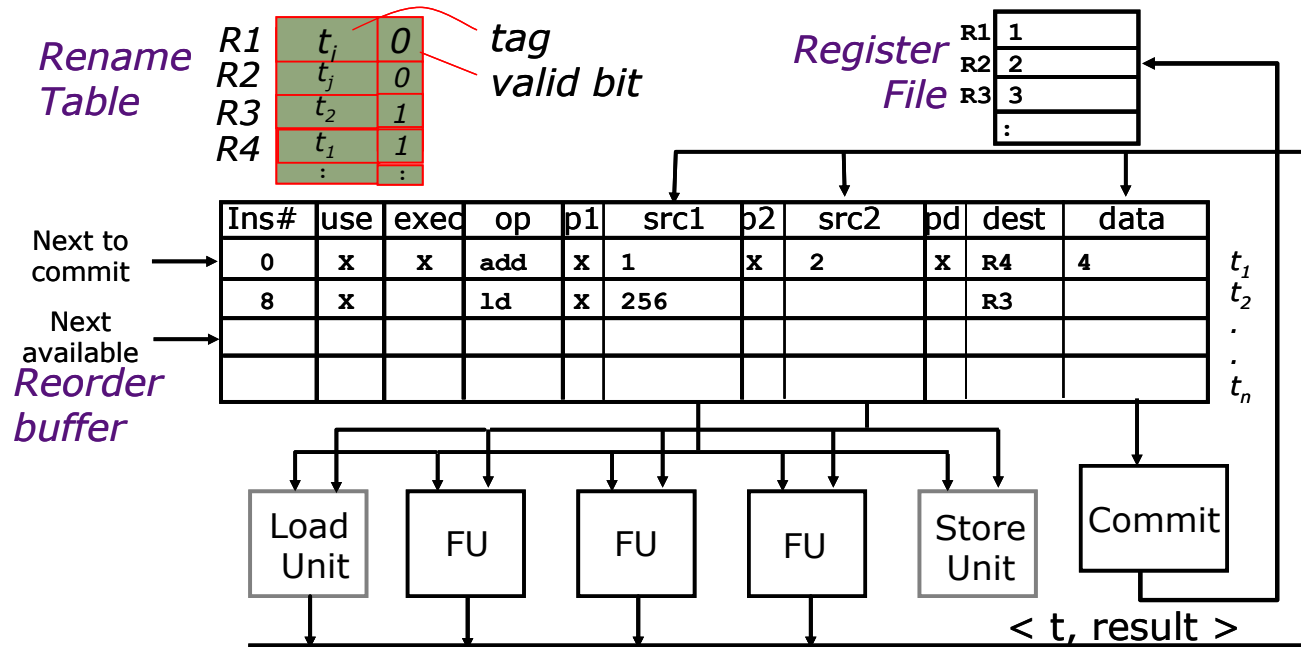


## Basic Operation:

- Enter op and tag or data (if known) for each source
- Replace tag with data as it becomes available
- Issue instruction when all sources are available
- Save dest data when operation finishes
- Commit saved dest data when instruction commits


# Unified Physical Register File

(MIPS R10K, Alpha 21264, Pentium 4)

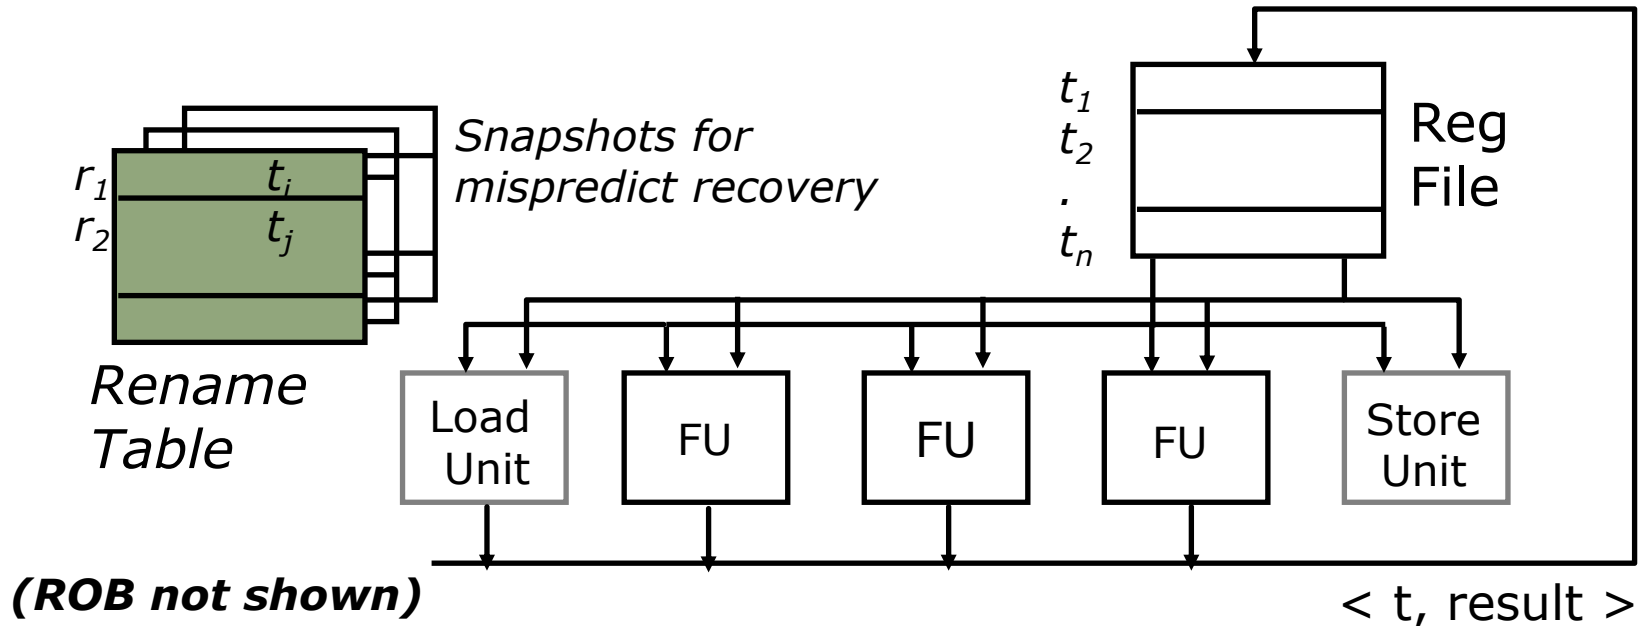

- One regfile for both *committed* and *speculative* values (no data in ROB)
- During decode, instruction result allocated new physical register, source regs translated to physical regs through rename table
- Instruction reads data from regfile at start of execute (not in decode)
- Write-back updates reg. busy bits on instructions in ROB (assoc. search)
- Snapshots of rename table taken at every branch to recover mispredicts
- On exception, renaming undone in reverse order of issue (*MIPS R10000*)

# Speculative & Out-of-Order Execution

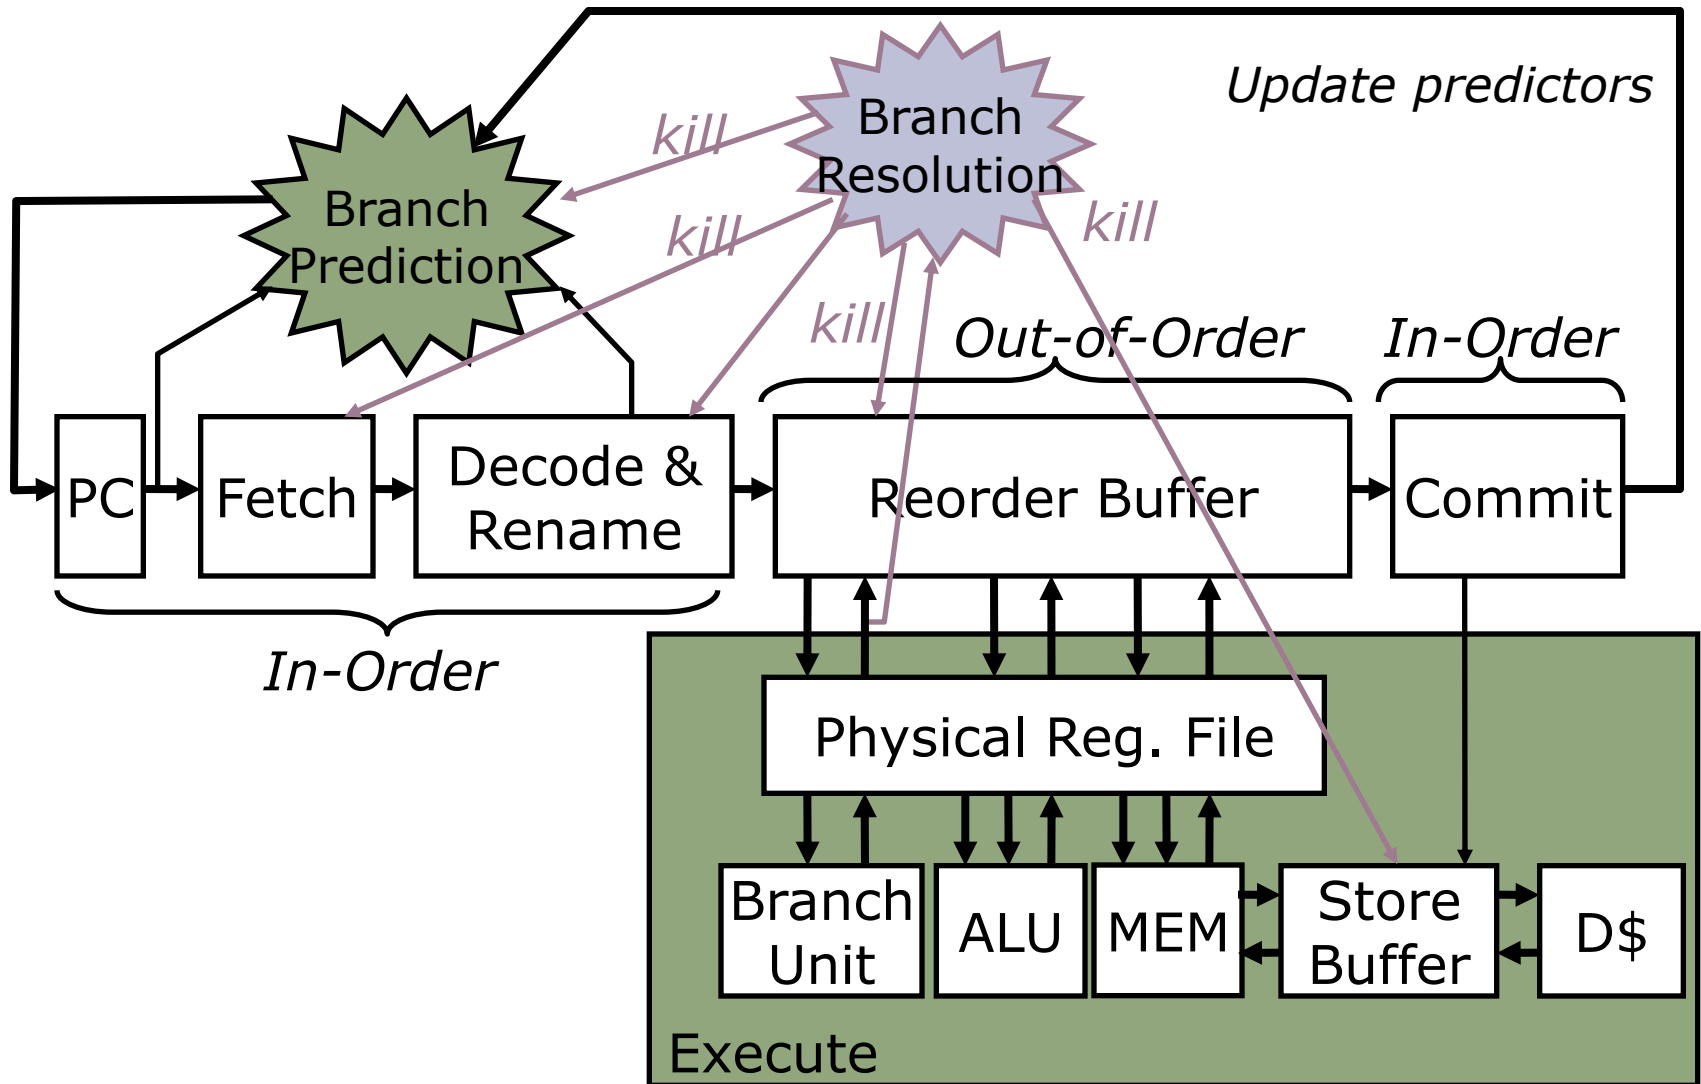

# Lifetime of Physical Registers

---

- Physical regfile holds committed and speculative values
- Physical registers decoupled from ROB entries (*no data in ROB*)


- a) ld r1, (r3)
- b) add r3, r1, #4
- c) sub r1, r3, r9
- d) add r3, r1, r7
- e) ld r6, (r1)
- f) add r8, r6, r3
- g) st r8, (r1)
- h) ld r3, (r11)

# Lifetime of Physical Registers

---

- Physical regfile holds committed and speculative values
- Physical registers decoupled from ROB entries (*no data in ROB*)


a) ld r1, (r3)  
b) add r3, r1, #4  
c) sub r1, r3, r9  
d) add r3, r1, r7  
e) ld r6, (r1)  
f) add r8, r6, r3  
g) st r8, (r1)  
h) ld r3, (r11)

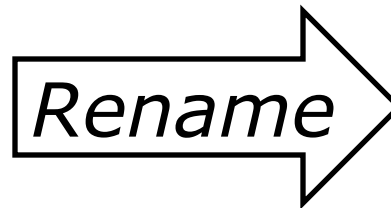

# Lifetime of Physical Registers

---

- Physical regfile holds committed and speculative values
- Physical registers decoupled from ROB entries (*no data in ROB*)

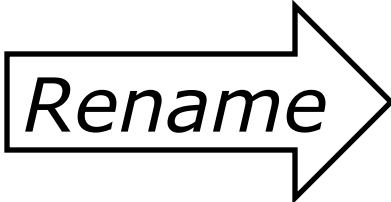
a)	ld <b>r1</b> , (r3)		ld P1, (Px)
b)	add r3, r1, #4		add P2, P1, #4
c)	sub <b>r1</b> , r3, r9		sub P3, P2, Py
d)	add <b>r3</b> , r1, r7		add P4, P3, Pz
e)	ld r6, (r1)		ld P5, (P3)
f)	add r8, r6, r3		add P6, P5, P4
g)	st r8, (r1)		st P6, (P3)
h)	ld <b>r3</b> , (r11)		ld P7, (Pw)



# Lifetime of Physical Registers

---

- Physical regfile holds committed and speculative values
- Physical registers decoupled from ROB entries (*no data in ROB*)

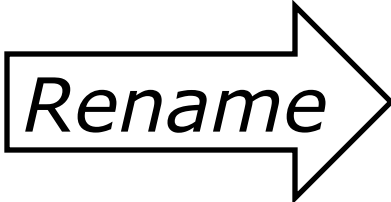
a)	ld <b>r1</b> , (r3)		ld P1, (Px)
b)	add r3, r1, #4		add P2, P1, #4
c)	sub <b>r1</b> , r3, r9		sub P3, P2, Py
d)	add <b>r3</b> , r1, r7		add P4, P3, Pz
e)	ld r6, (r1)		ld P5, (P3)
f)	add r8, r6, r3		add P6, P5, P4
g)	st r8, (r1)		st P6, (P3)
h)	ld <b>r3</b> , (r11)		ld P7, (Pw)

When can we reuse a physical register?

# Lifetime of Physical Registers

---


- Physical regfile holds committed and speculative values
- Physical registers decoupled from ROB entries (*no data in ROB*)

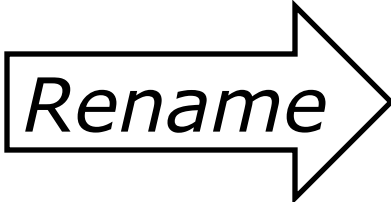a)	ld <b>r1</b> , (r3)		ld P1, (Px)
b)	add r3, r1, #4		add P2, P1, #4
c)	sub <b>r1</b> , r3, r9		sub P3, P2, Py
d)	add <b>r3</b> , r1, r7		add P4, P3, Pz
e)	ld r6, (r1)		ld P5, (P3)
f)	add r8, r6, r3		add P6, P5, P4
g)	st r8, (r1)		st P6, (P3)
h)	ld <b>r3</b> , (r11)		ld P7, (Pw)

When can we reuse a physical register?

*When next write to same architectural register commits*

# Physical Register Management

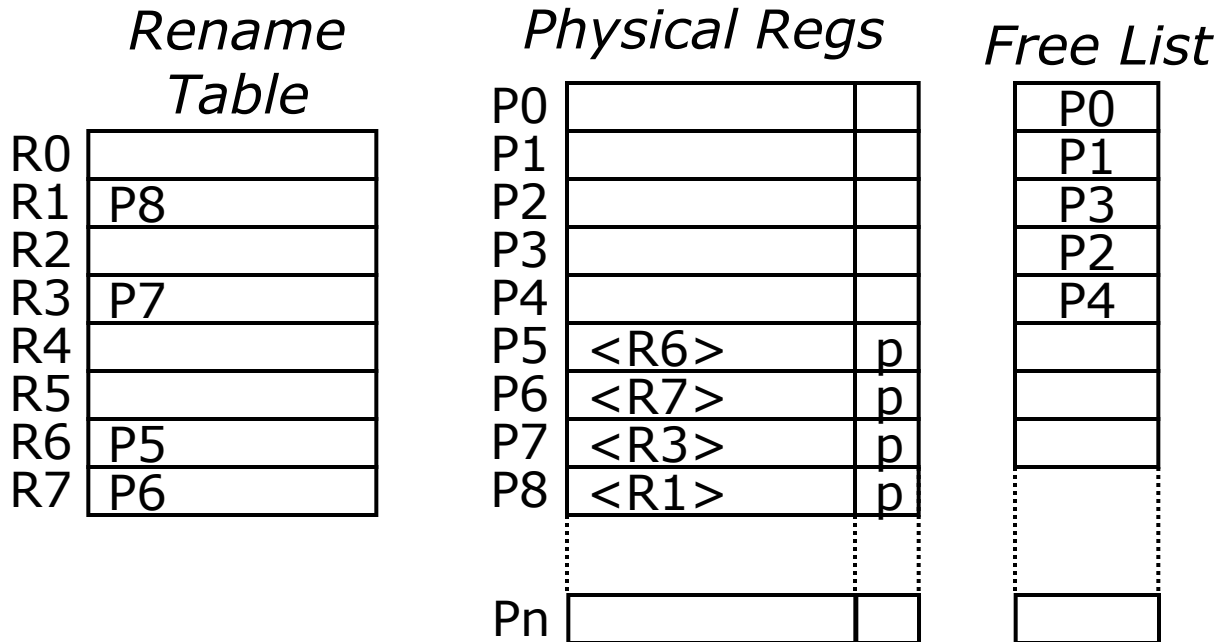

```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd

*(LPRd requires third read port on Rename Table for each instruction)*

# Physical Register Management

*Rename Table*

R0	
R1	P8
R2	
R3	P7
R4	
R5	
R6	P5
R7	P6

*Physical Regs*

P0		
P1		
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8	<R1>	p
...	...	...
Pn		

*Free List*


P0
P1
P3
P2
P4

```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd


# Physical Register Management

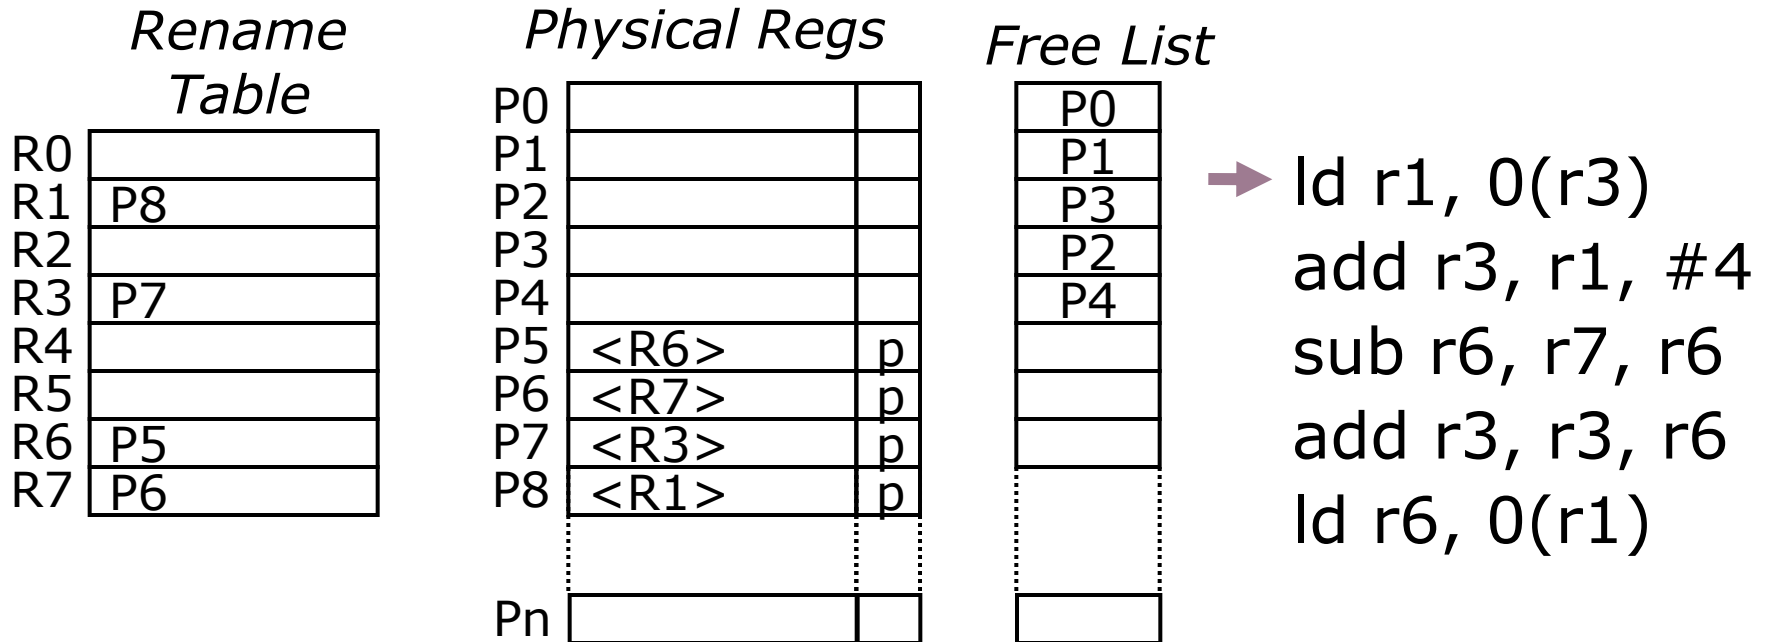

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd


# Physical Register Management

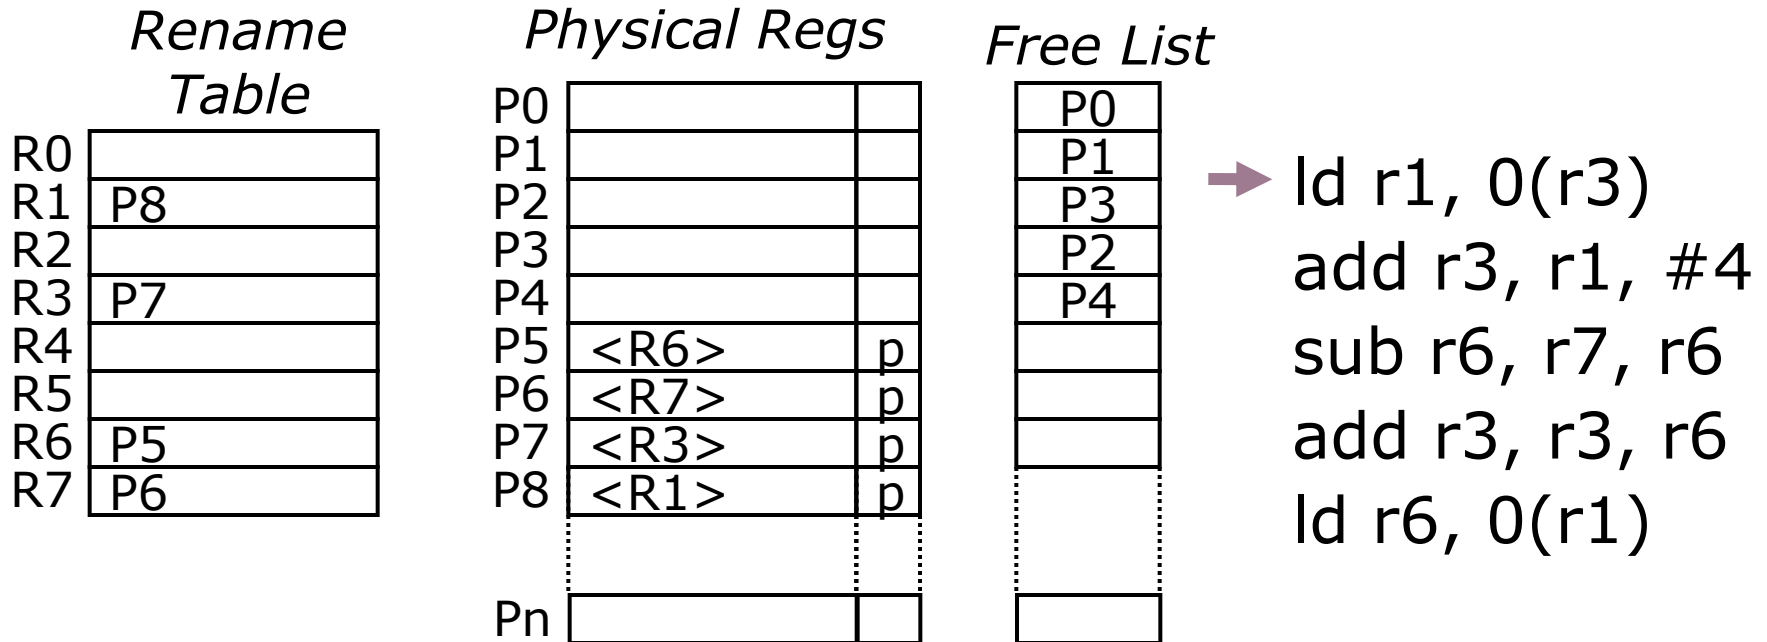

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld					r1		

# Physical Register Management

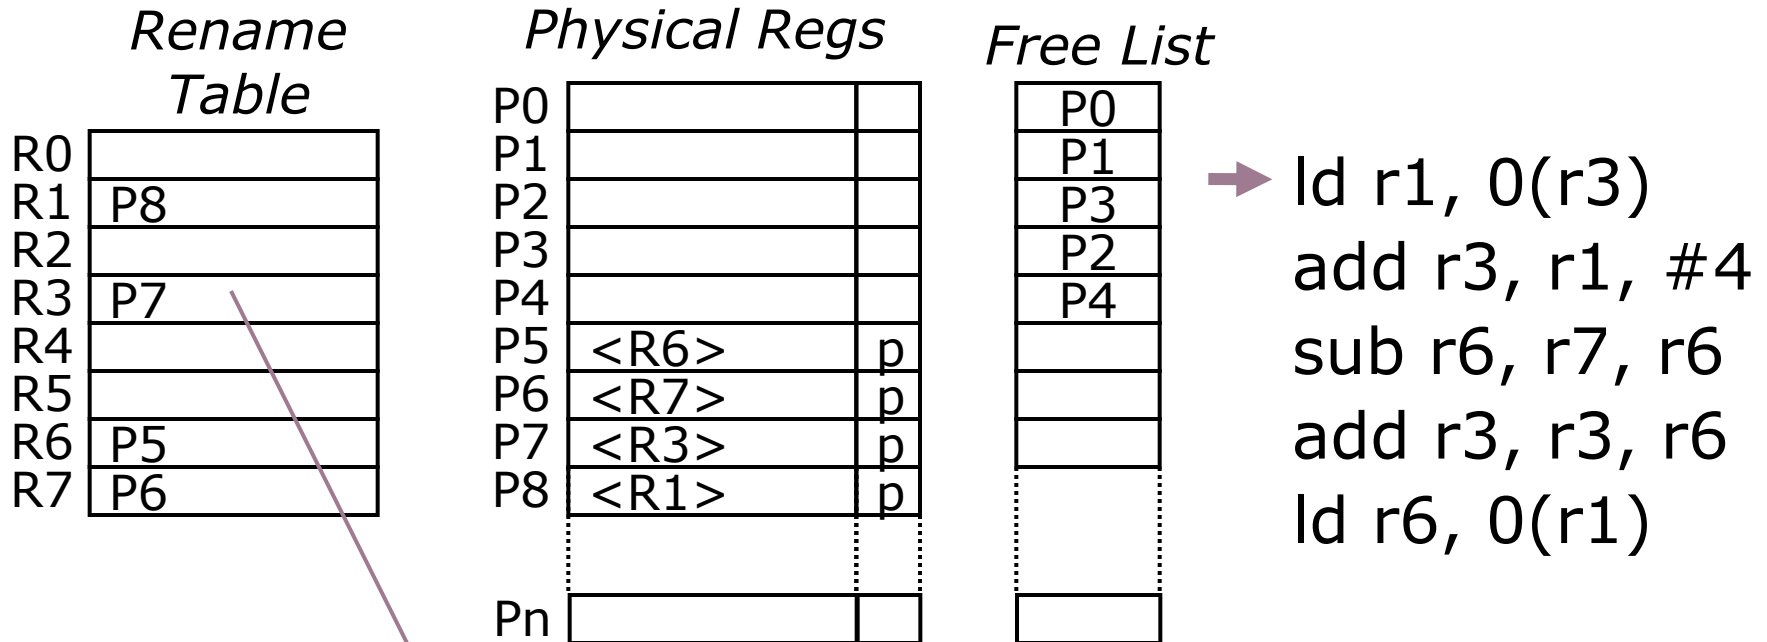

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld					r1		

# Physical Register Management

*Rename Table*

R0	
R1	P8
R2	
R3	P7
R4	
R5	
R6	P5
R7	P6

*Physical Regs*

P0		
P1		
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8	<R1>	p
...	...	...
Pn		

*Free List*

P0
P1
P3
P2
P4


→ `ld r1, 0(r3)`  
`add r3, r1, #4`  
`sub r6, r7, r6`  
`add r3, r3, r6`  
`ld r6, 0(r1)`

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld		P7			r1		




# Physical Register Management

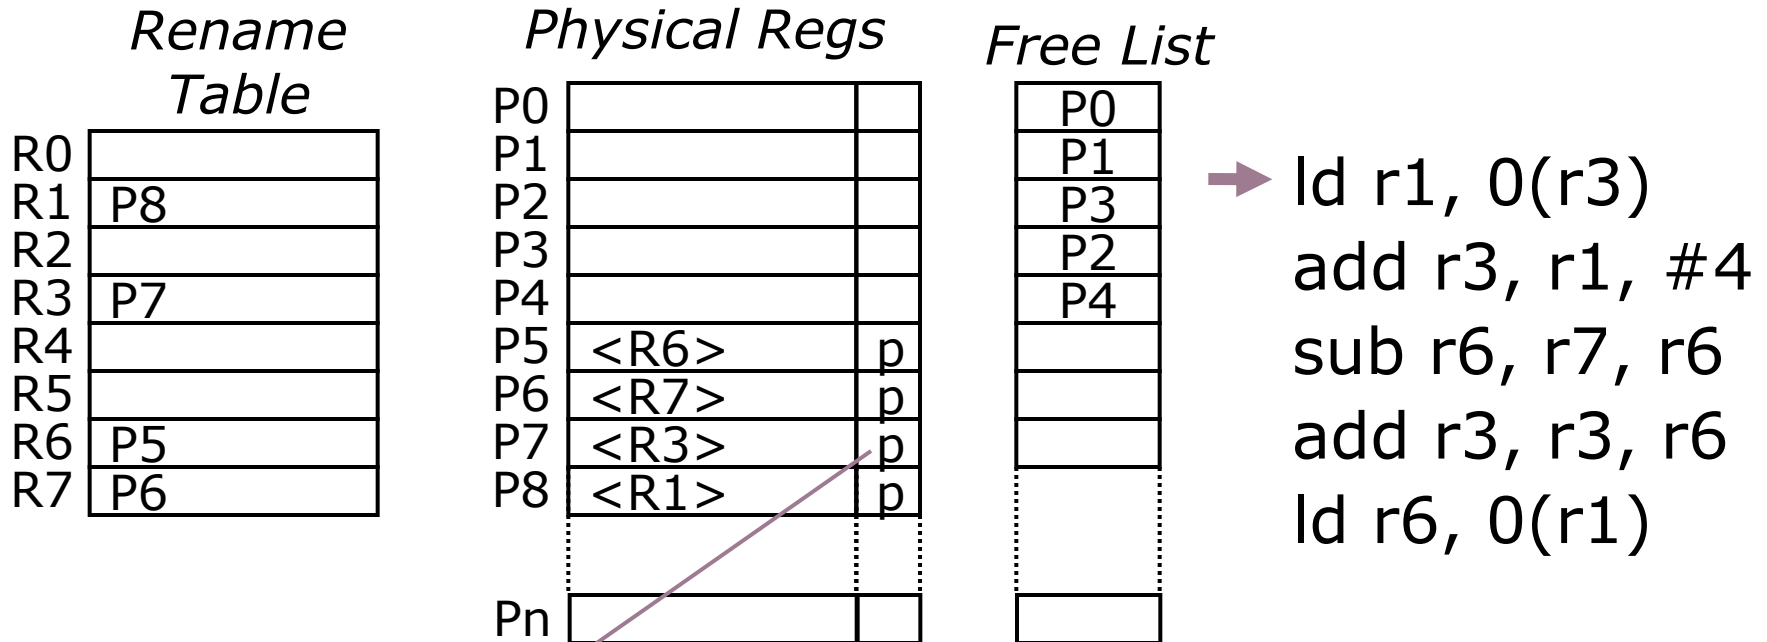

ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld		P7			r1		


# Physical Register Management

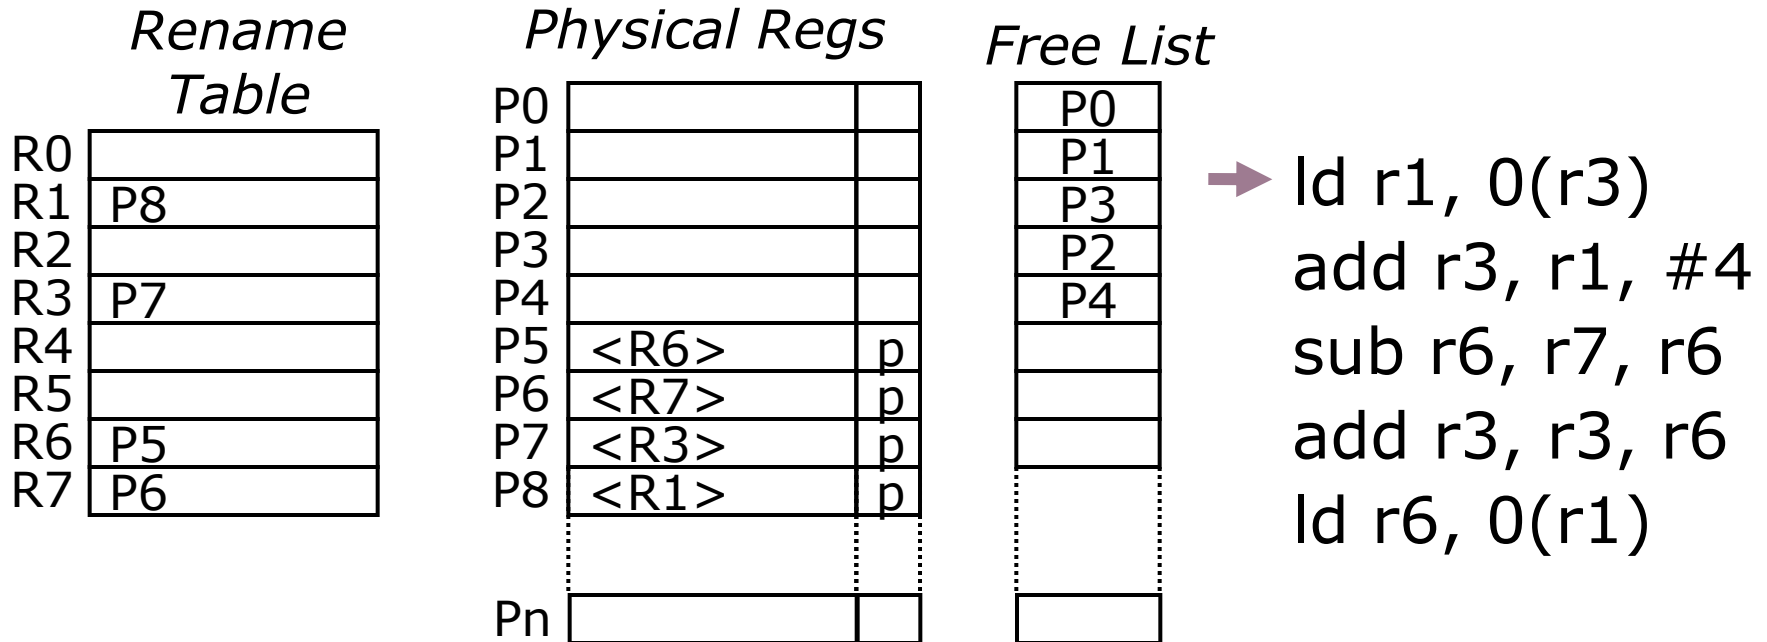

ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1		


# Physical Register Management

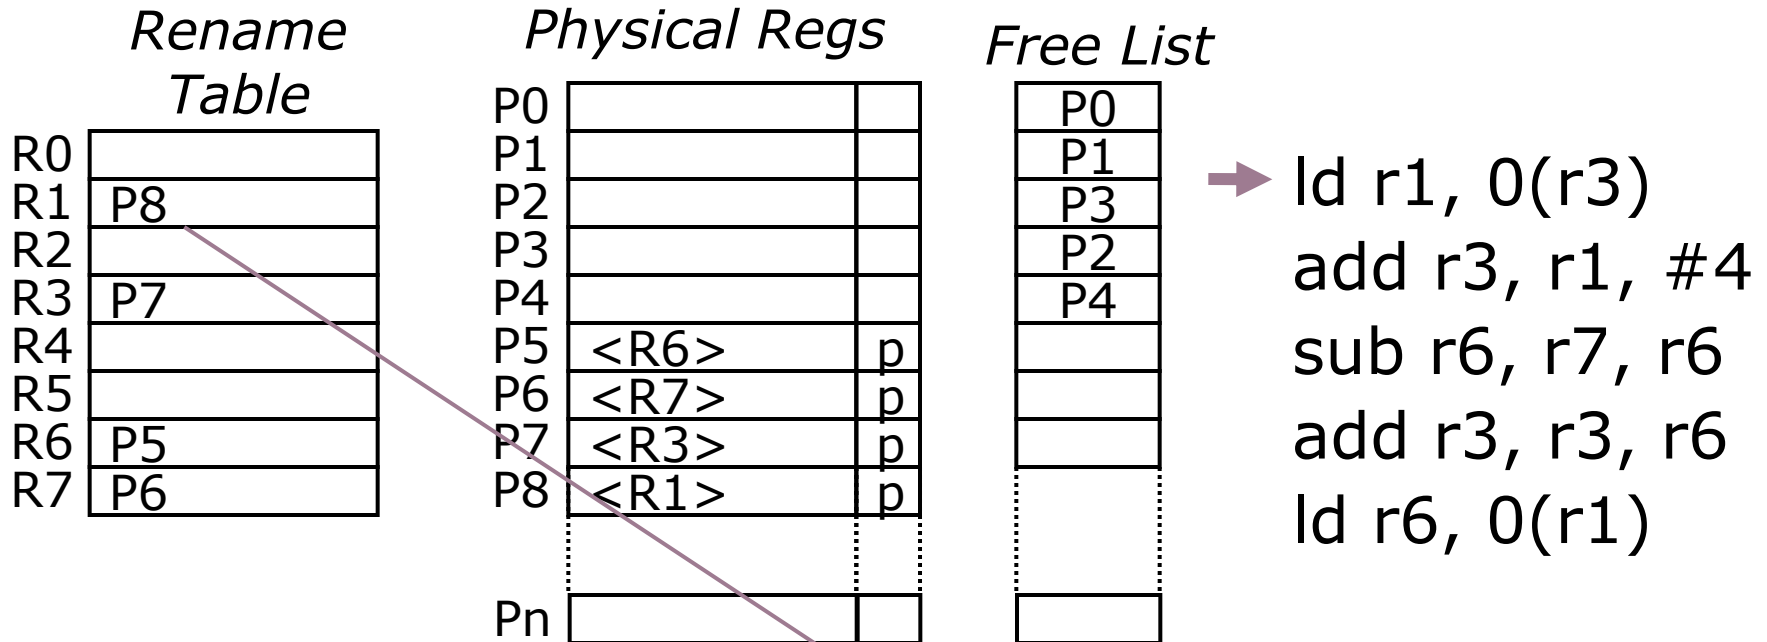

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1		


# Physical Register Management

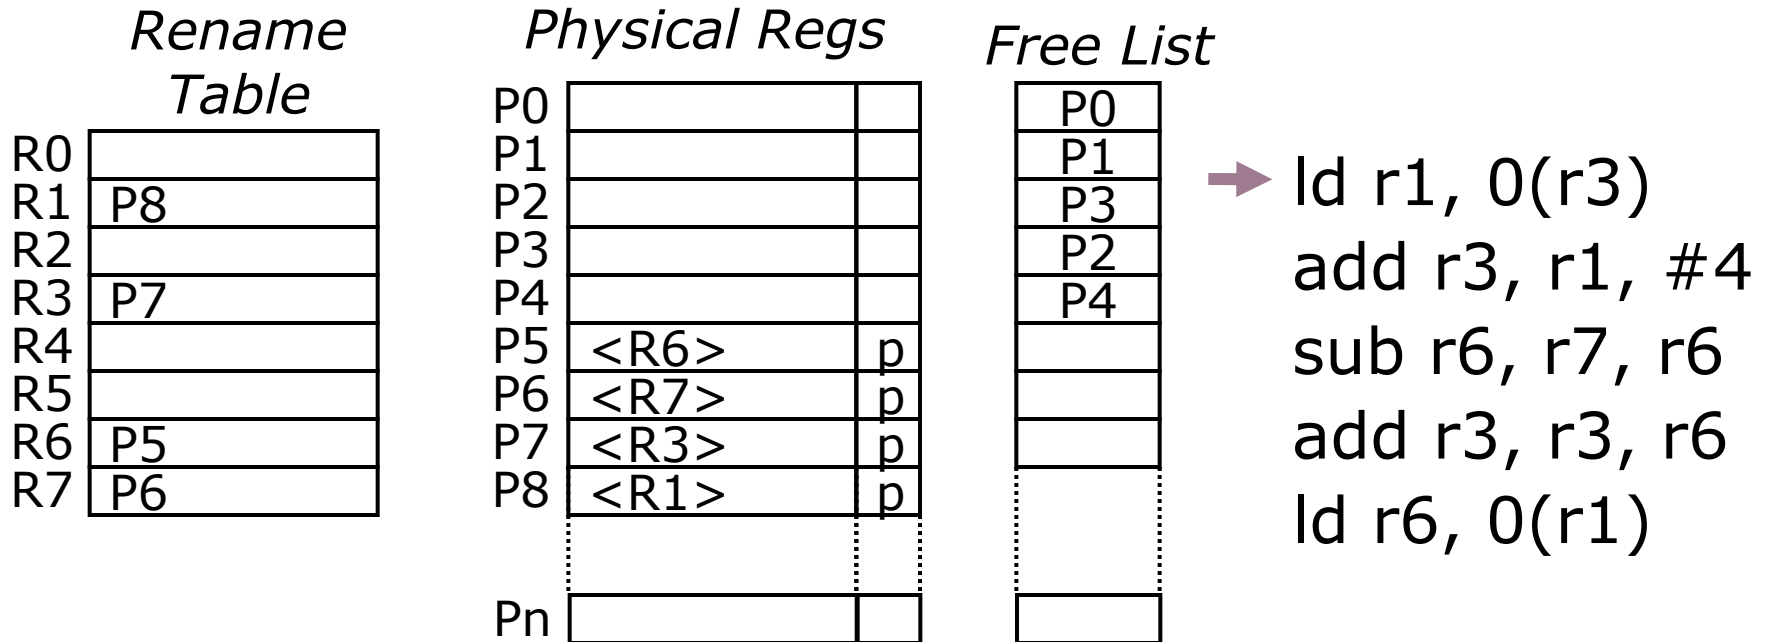

ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	

# Physical Register Management

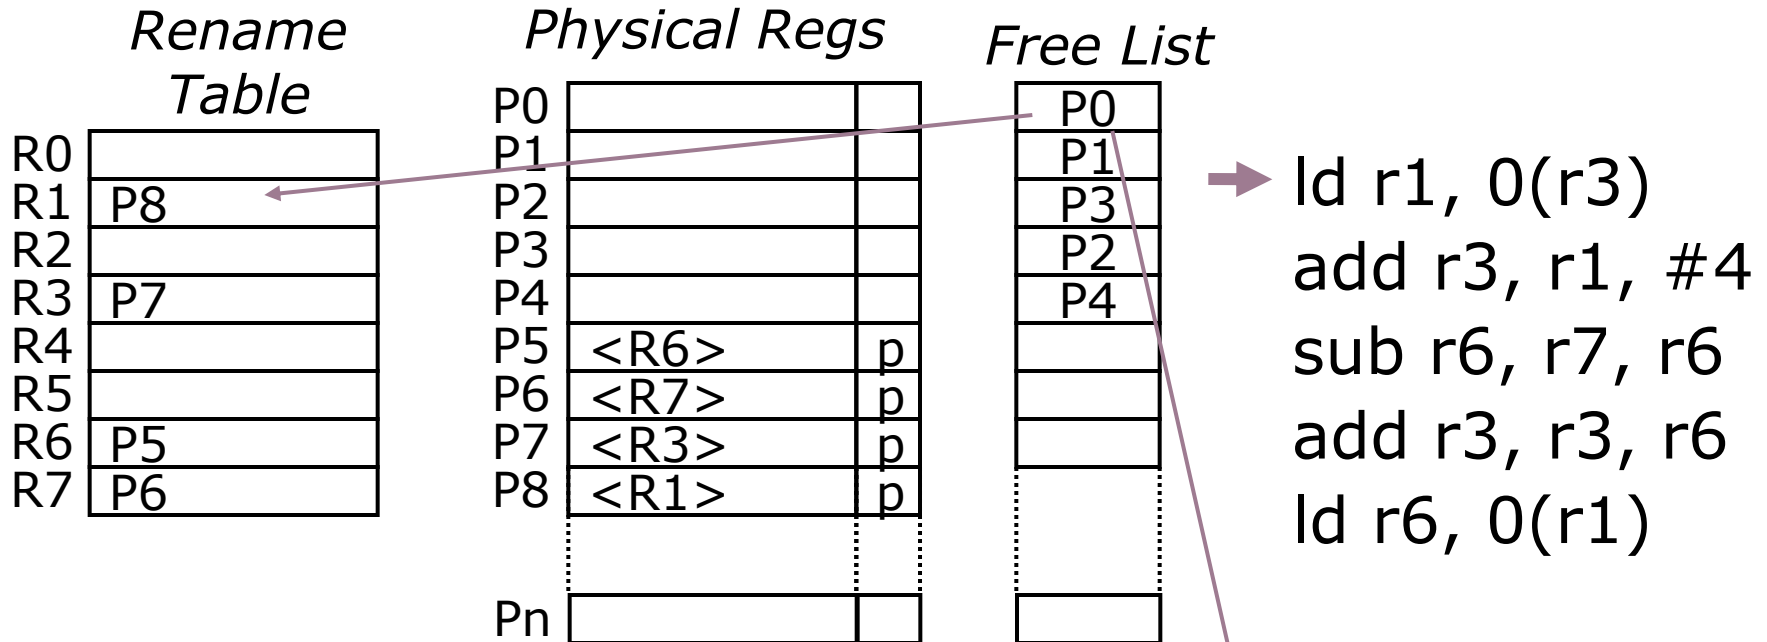

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	

# Physical Register Management

*Rename Table*

R0	
R1	<del>P8</del> P0
R2	
R3	P7
R4	
R5	
R6	P5
R7	P6

*Physical Regs*

P0		
P1		
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8	<R1>	p
...	...	...
Pn		

*Free List*

P0
P1
P3
P2
P4
...
...
...

→ `ld r1, 0(r3)`  
`add r3, r1, #4`  
`sub r6, r7, r6`  
`add r3, r3, r6`  
`ld r6, 0(r1)`

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	

# Physical Register Management

*Rename Table*

R0	
R1	<del>P8</del> P0
R2	
R3	P7
R4	
R5	
R6	P5
R7	P6

*Physical Regs*

P0		
P1		
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8	<R1>	p
...	...	...
Pn		

*Free List*


P0
P1
P3
P2
P4
...
...
...

→ ld r1, 0(r3)  
 add r3, r1, #4  
 sub r6, r7, r6  
 add r3, r3, r6  
 ld r6, 0(r1)

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0

# Physical Register Management

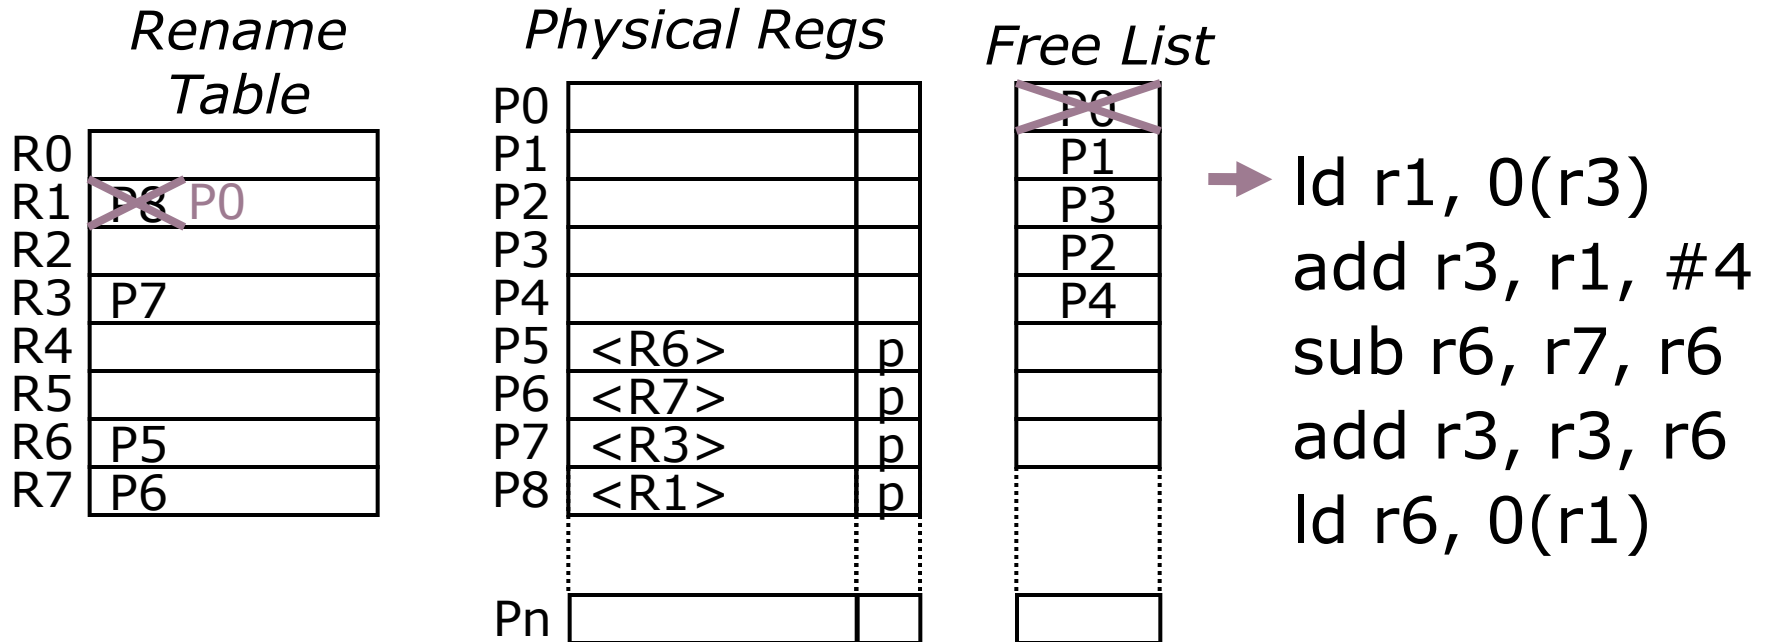


## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0



# Physical Register Management

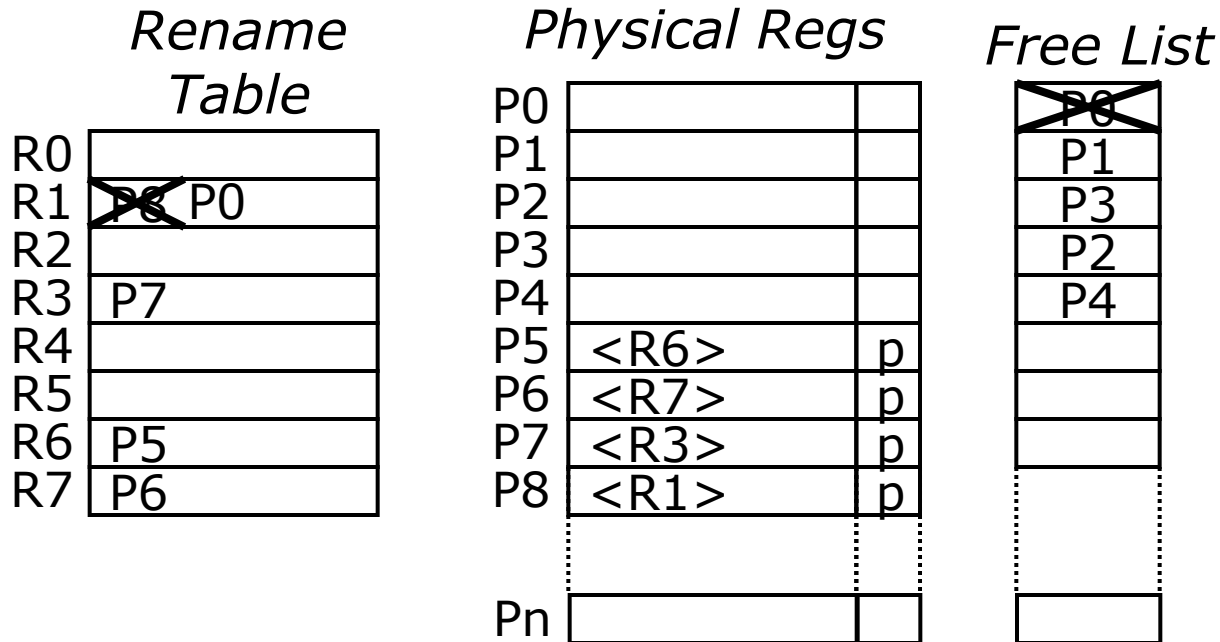


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0

# Physical Register Management

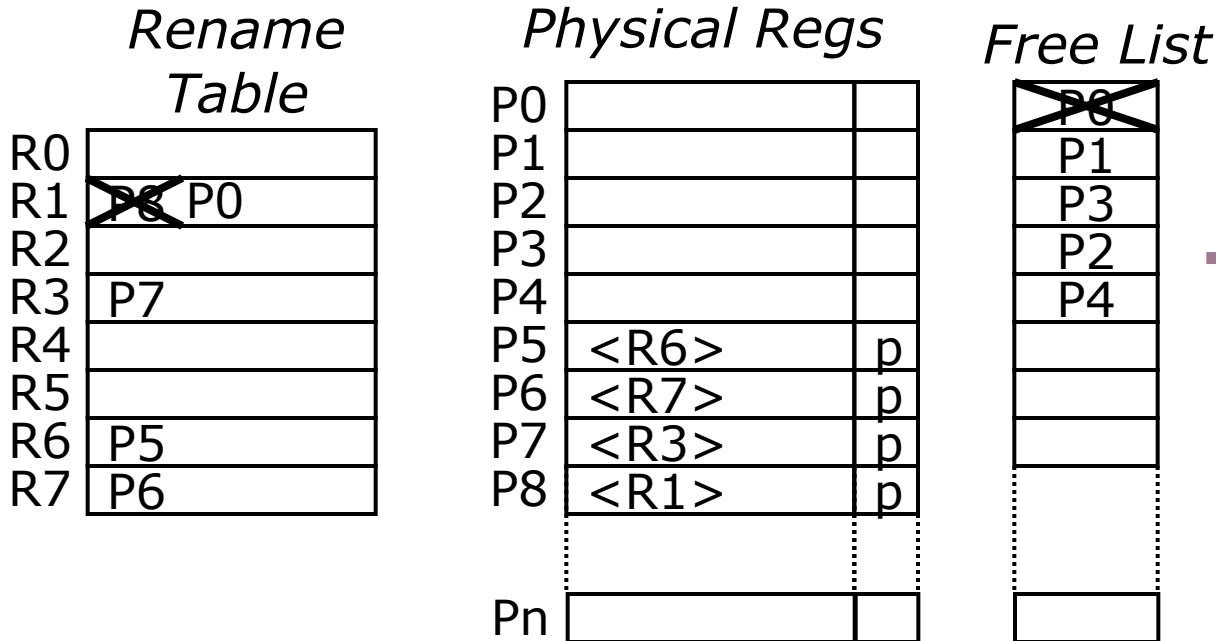


→

```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0


# Physical Register Management

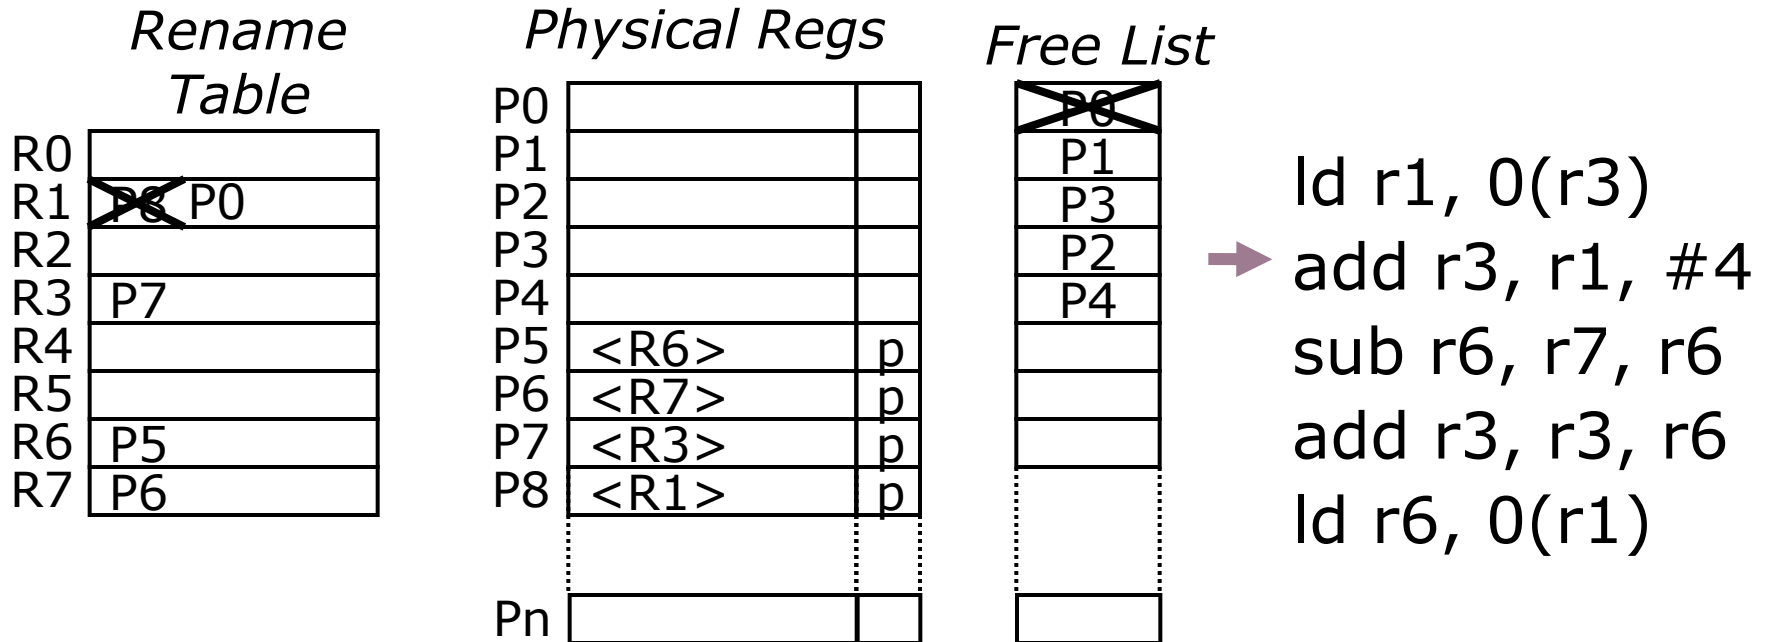

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3		


# Physical Register Management

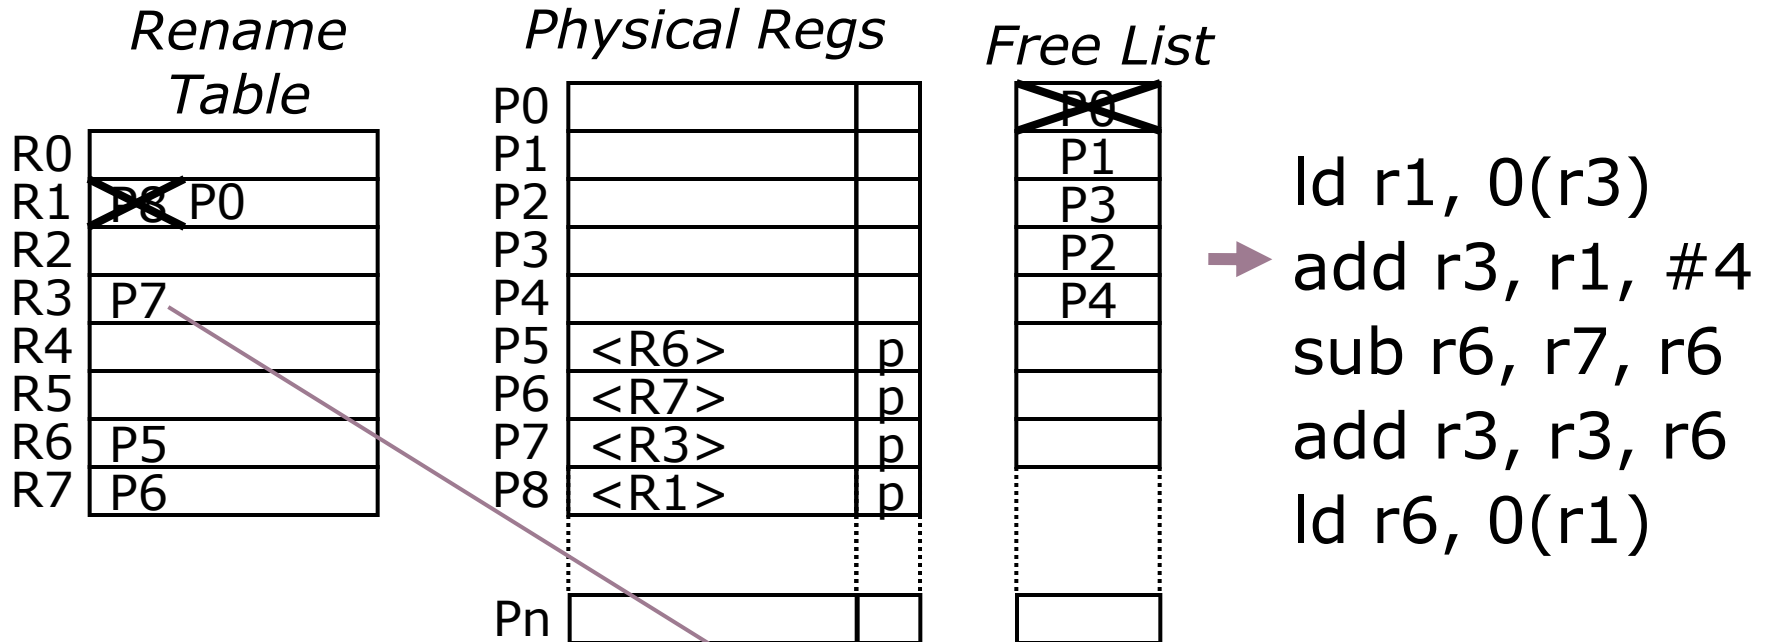

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3		


# Physical Register Management

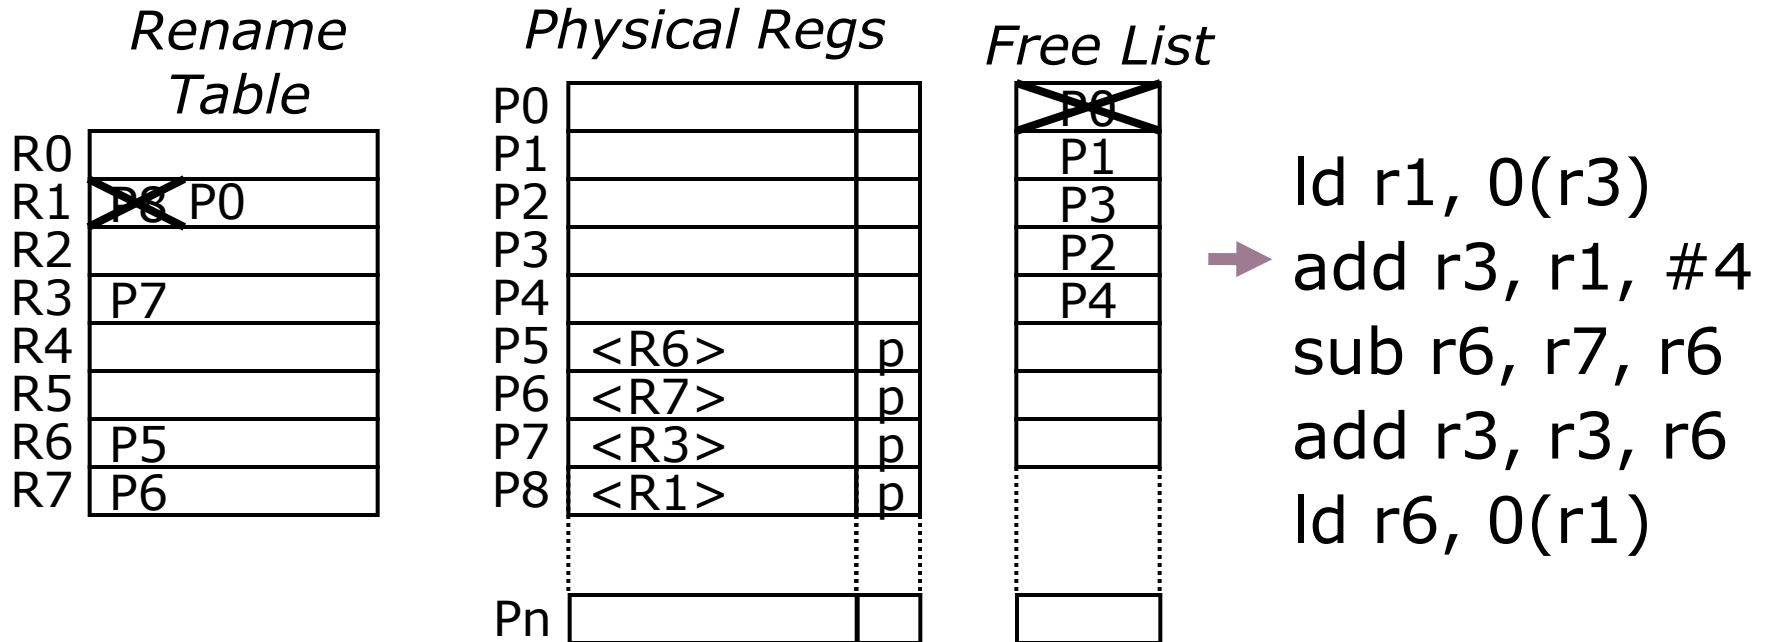

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	

# Physical Register Management

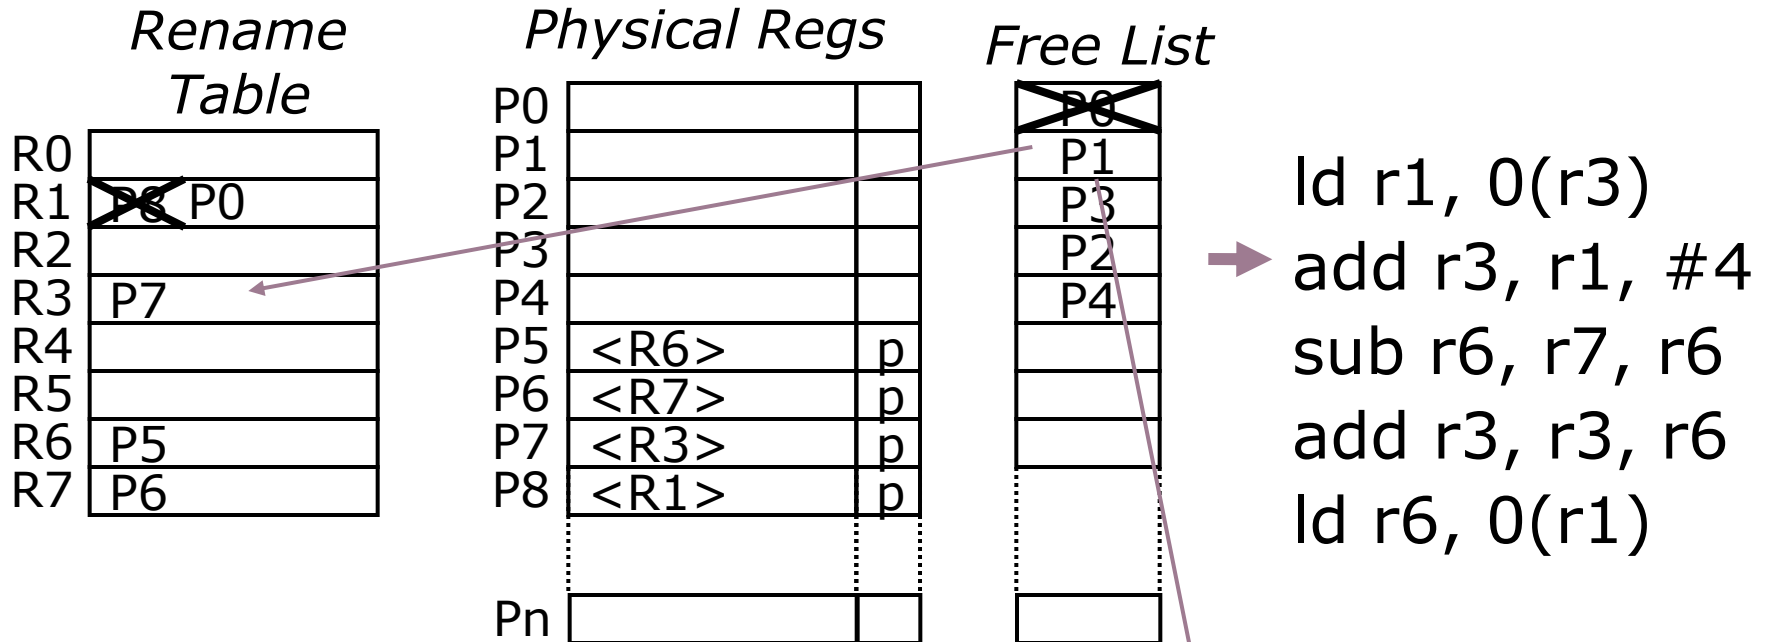

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	

# Physical Register Management

*Rename Table*

R0	
R1	<del>P0</del>
R2	
R3	<del>P1</del>
R4	
R5	
R6	P5
R7	P6

*Physical Regs*

P0		
P1		
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8	<R1>	p
...	...	...
Pn		

*Free List*


<del>P0</del>
P1
P3
P2
P4

→ `ld r1, 0(r3)`  
`add r3, r1, #4`  
`sub r6, r7, r6`  
`add r3, r3, r6`  
`ld r6, 0(r1)`

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	

# Physical Register Management

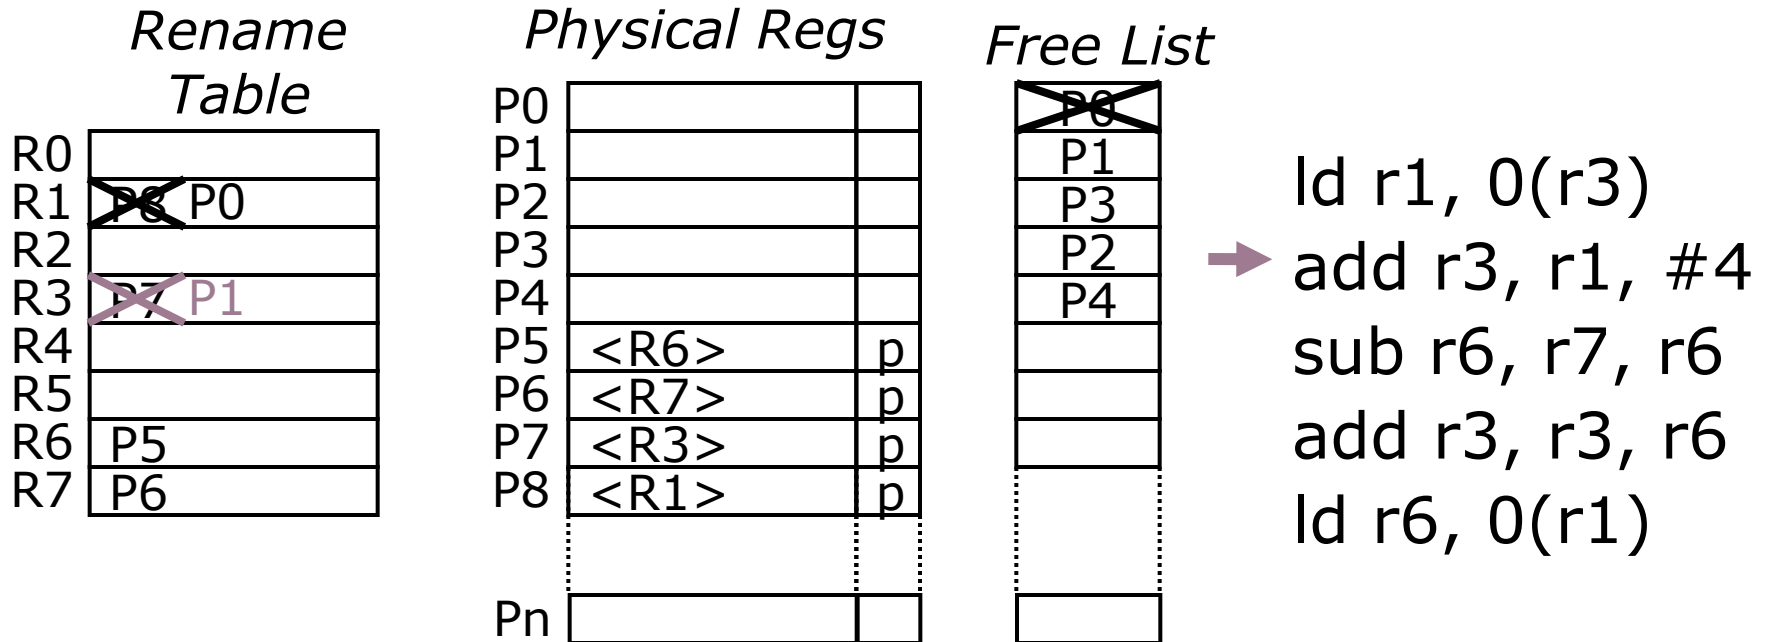


*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1




# Physical Register Management

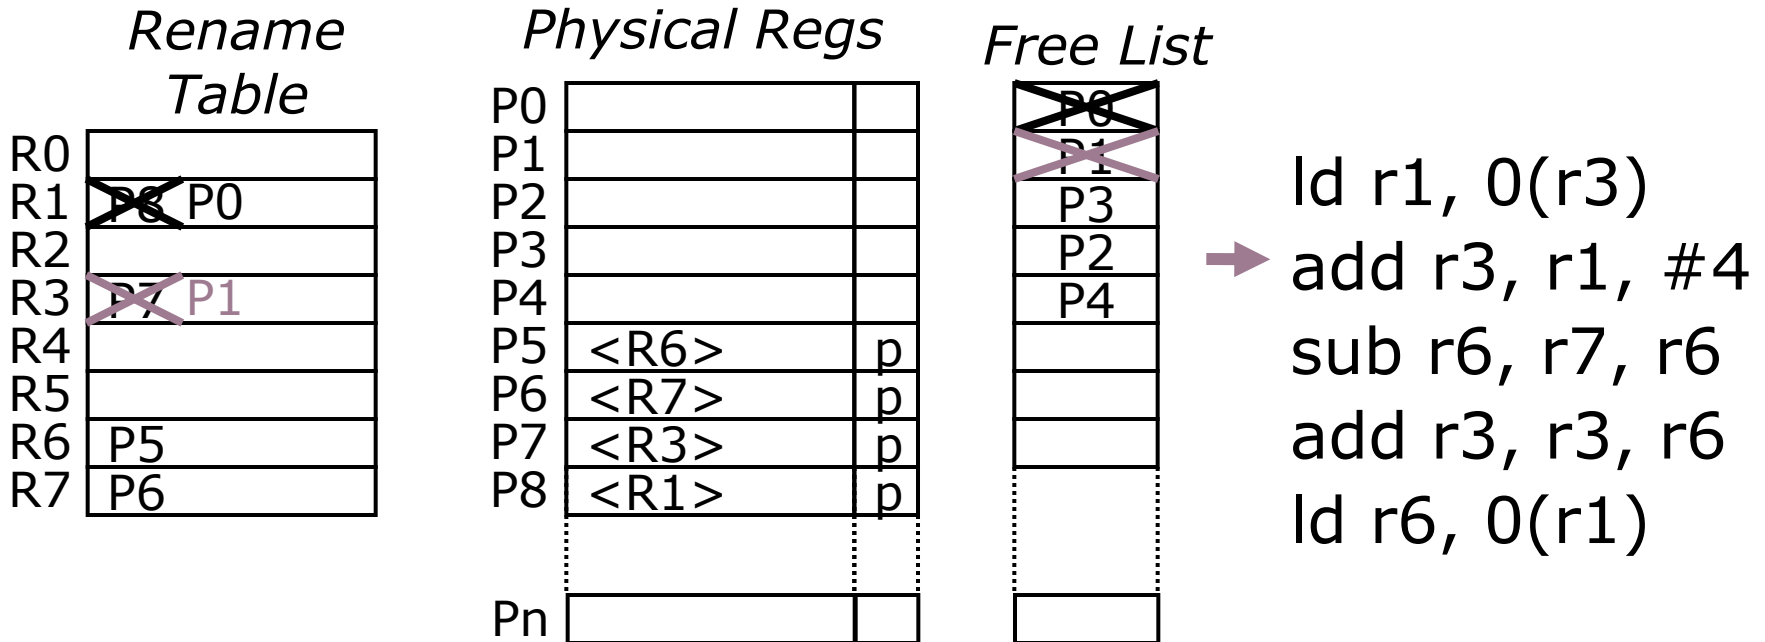

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1

# Physical Register Management

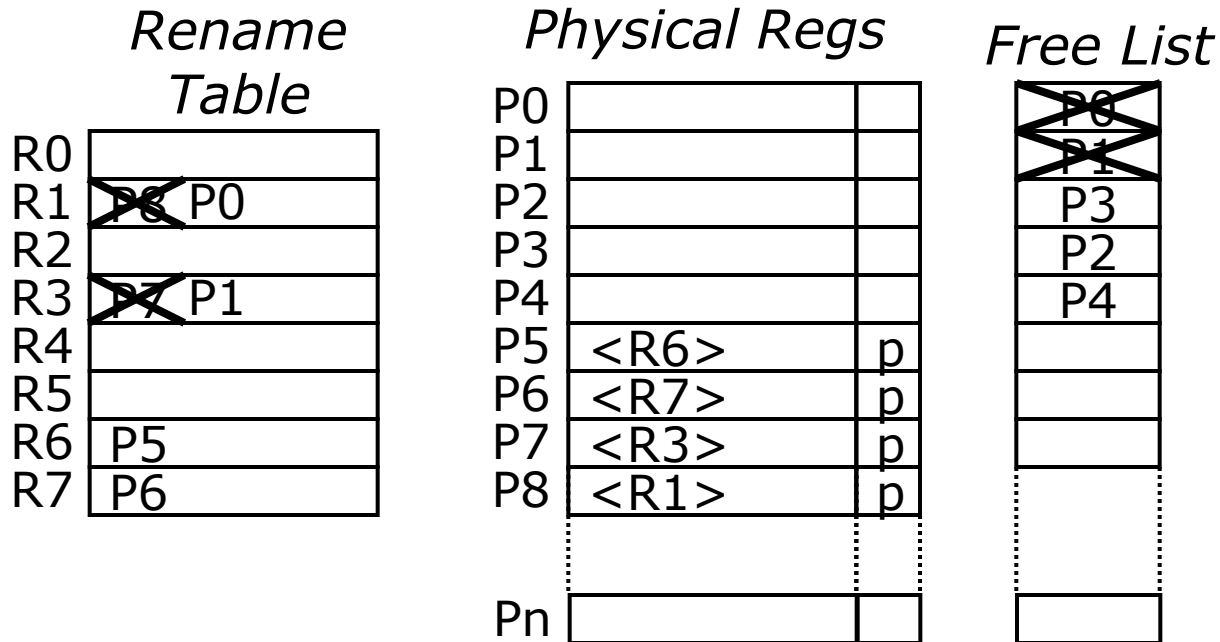


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1


# Physical Register Management

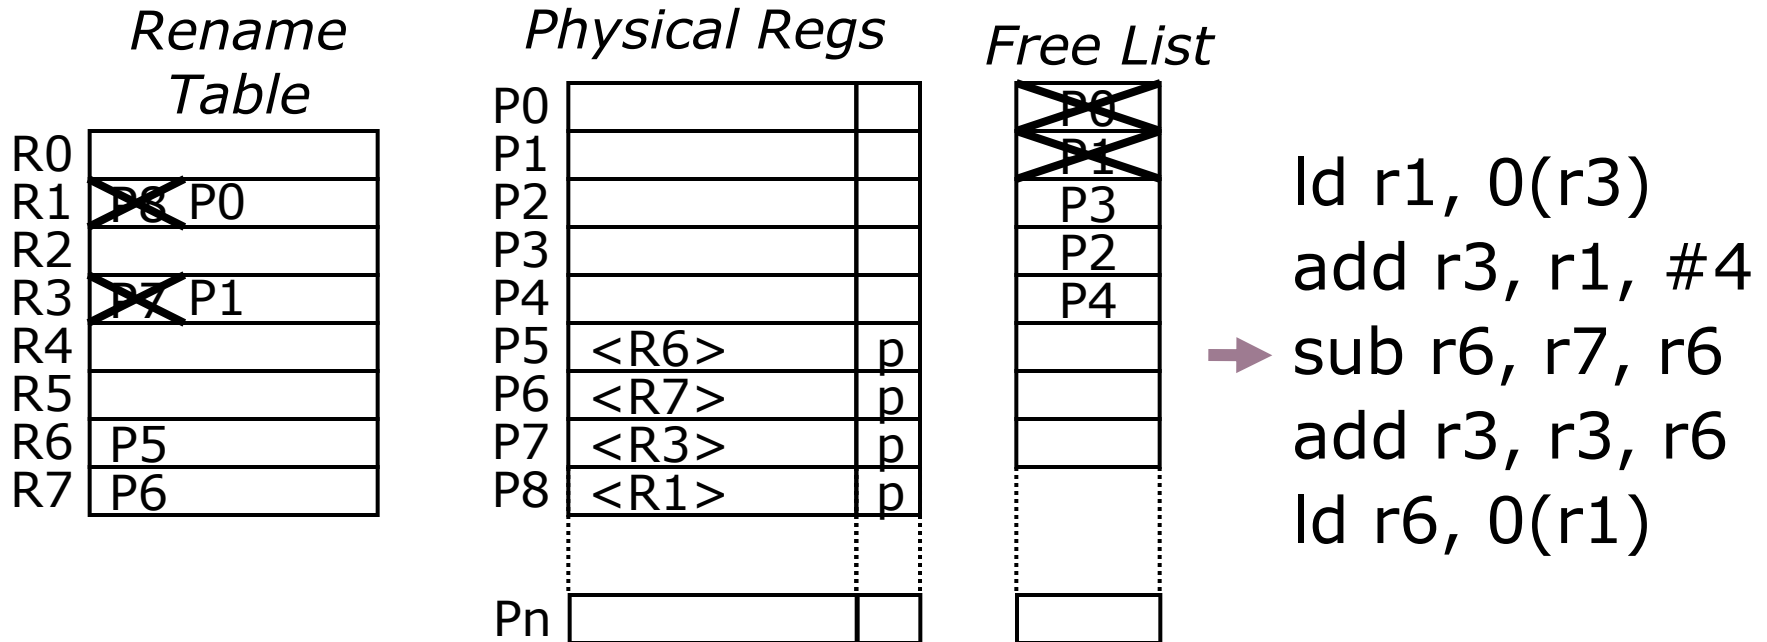

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1


# Physical Register Management

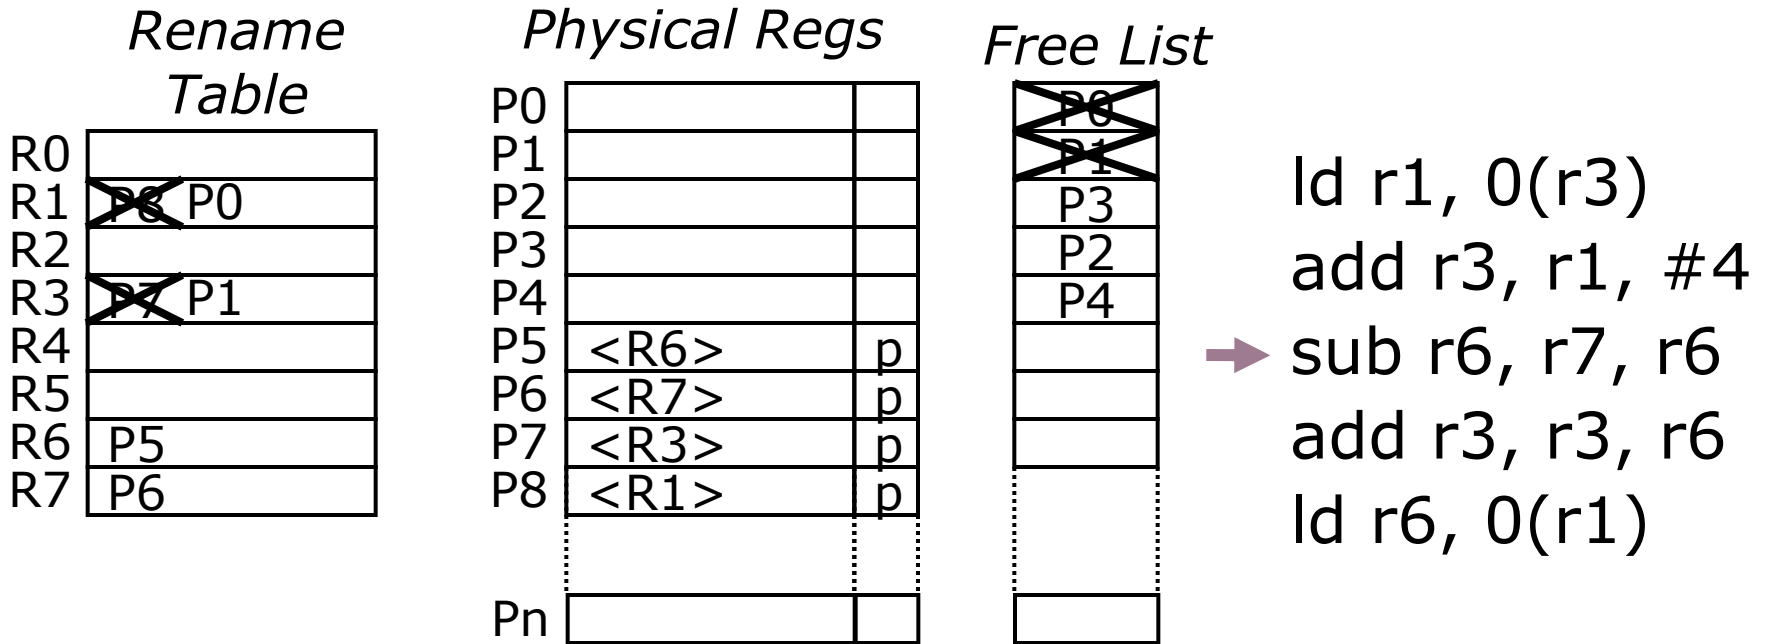

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6		


# Physical Register Management

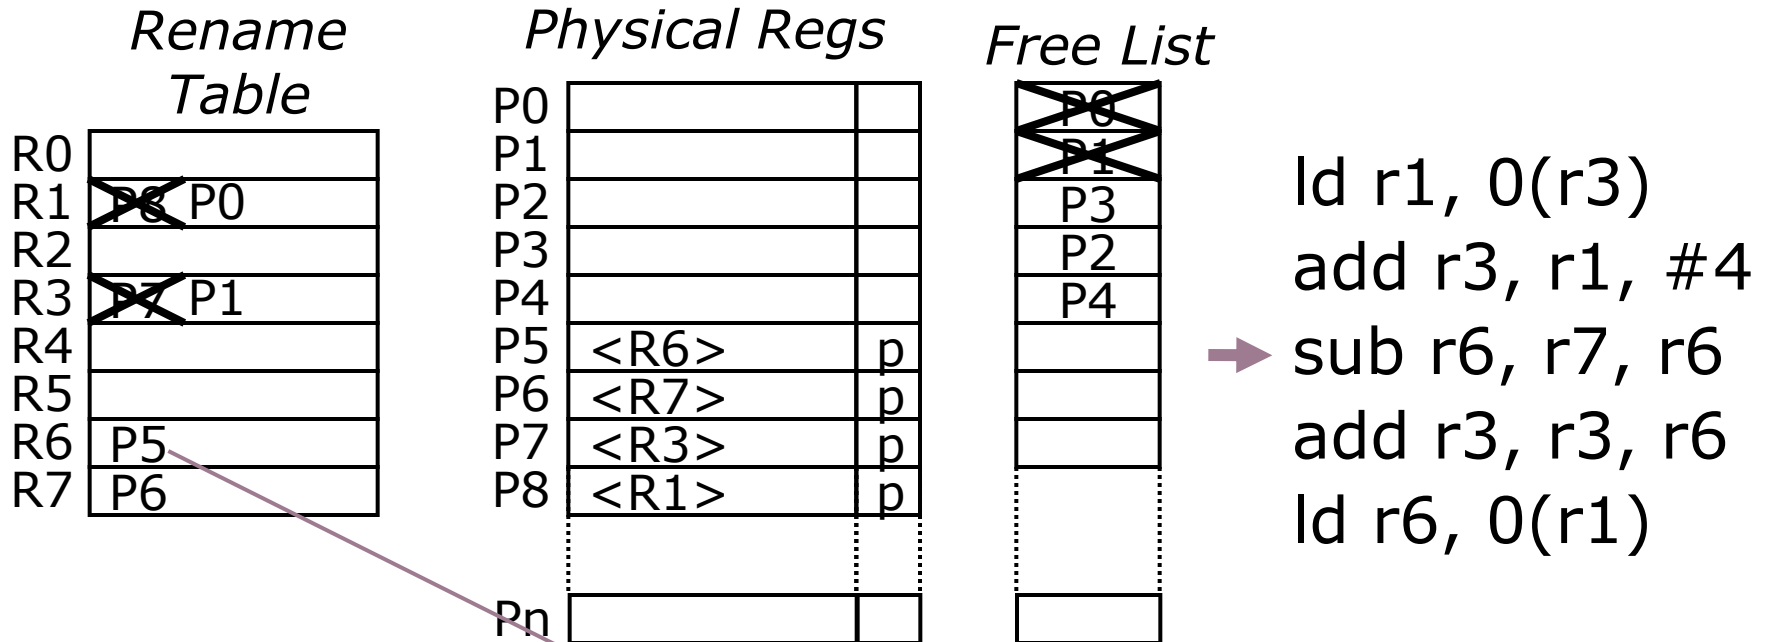

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6		


# Physical Register Management

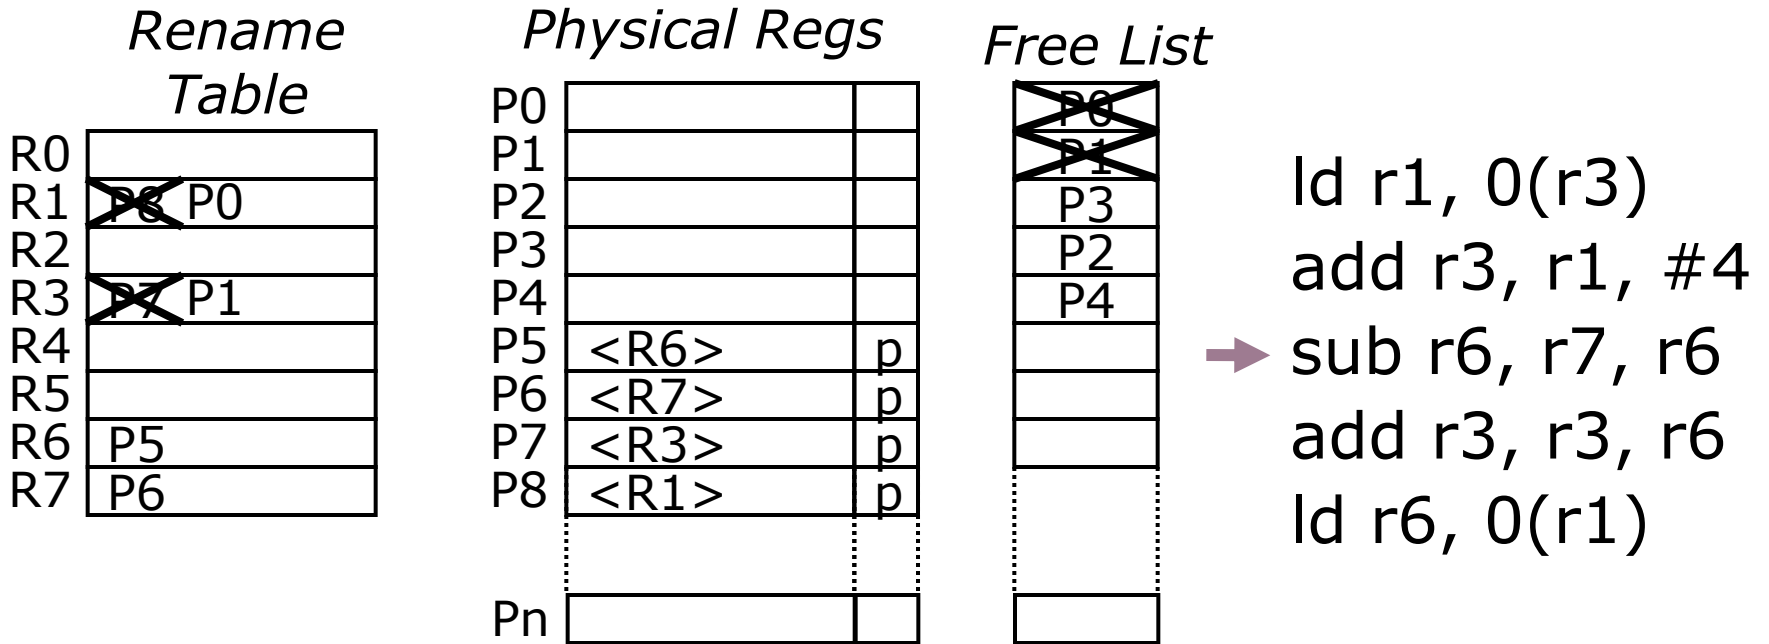

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	


# Physical Register Management

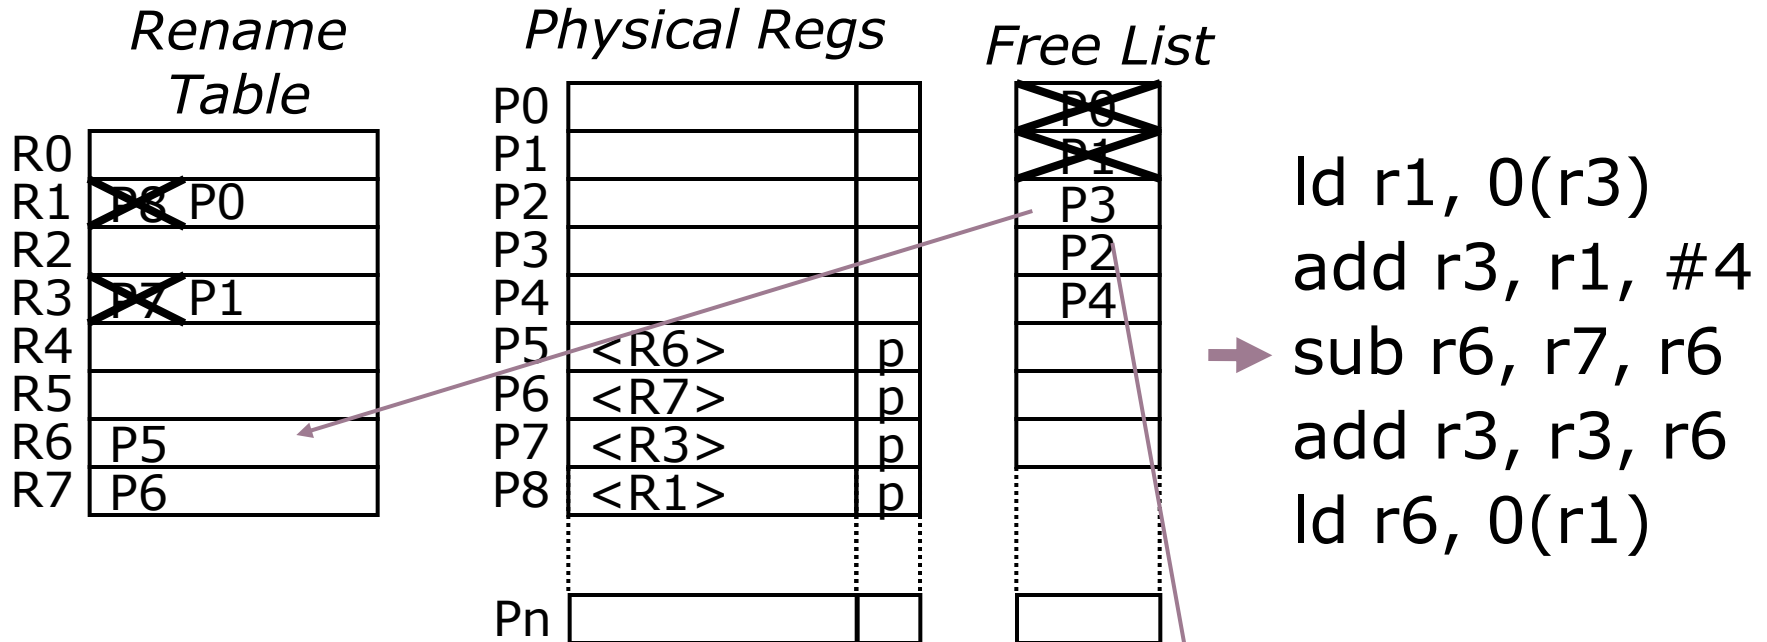

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	

# Physical Register Management

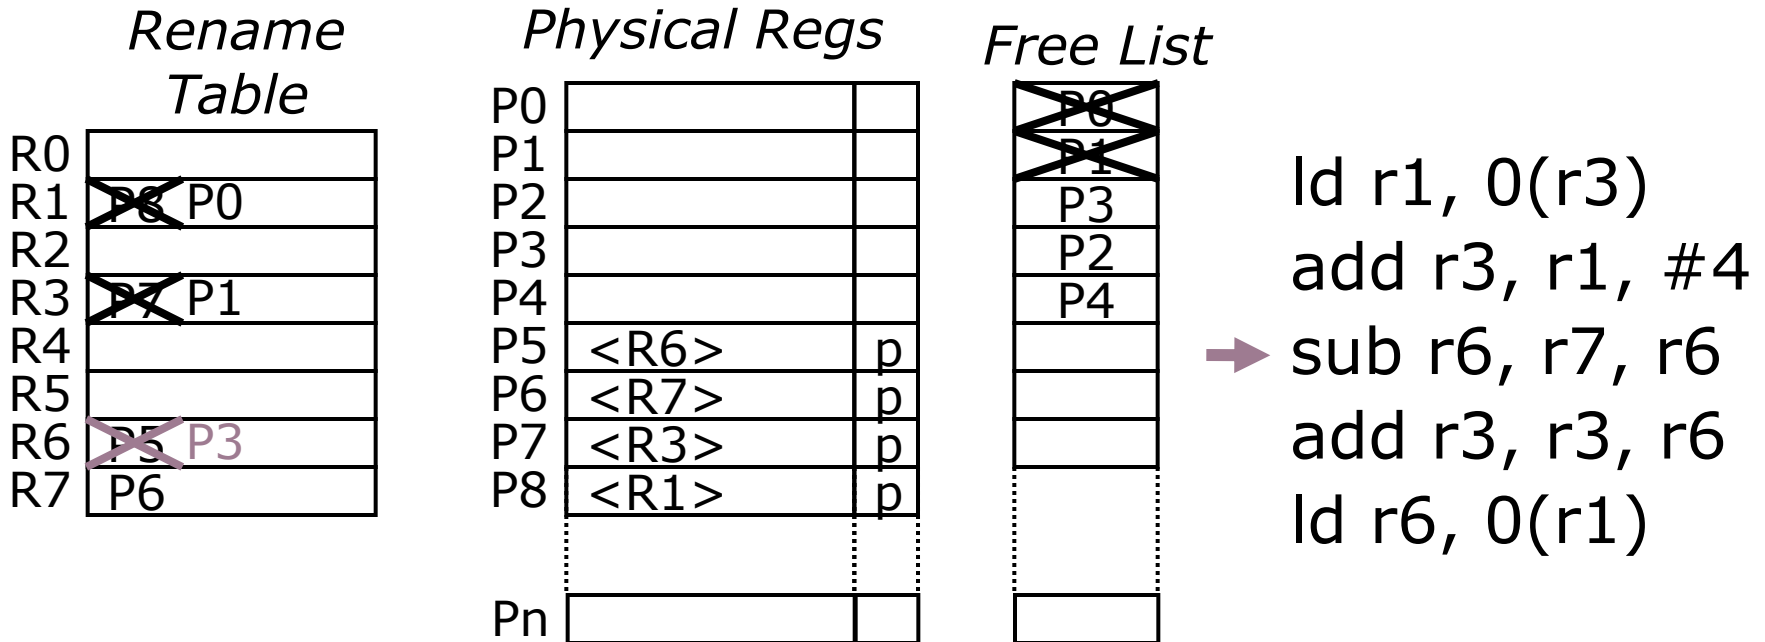


*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	




# Physical Register Management

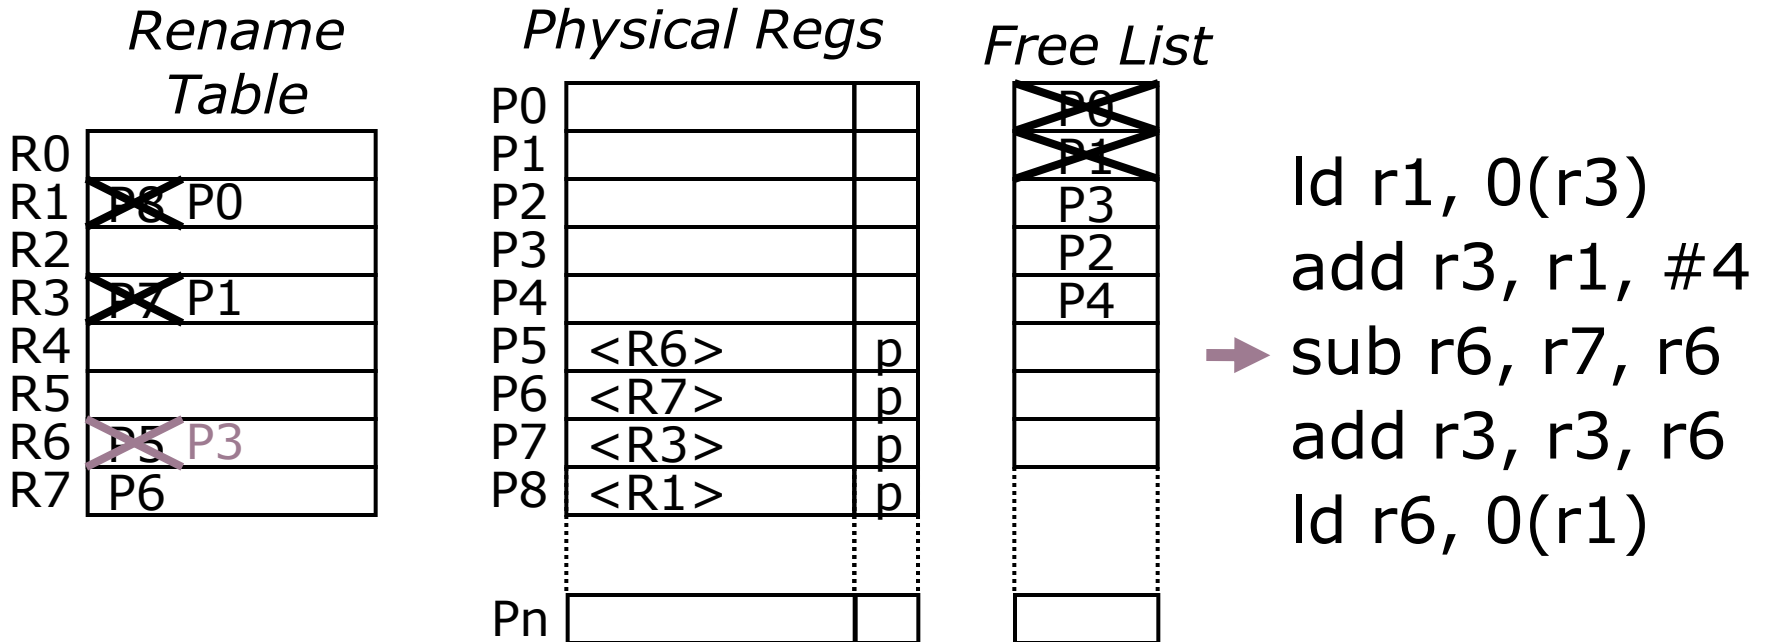

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3


# Physical Register Management

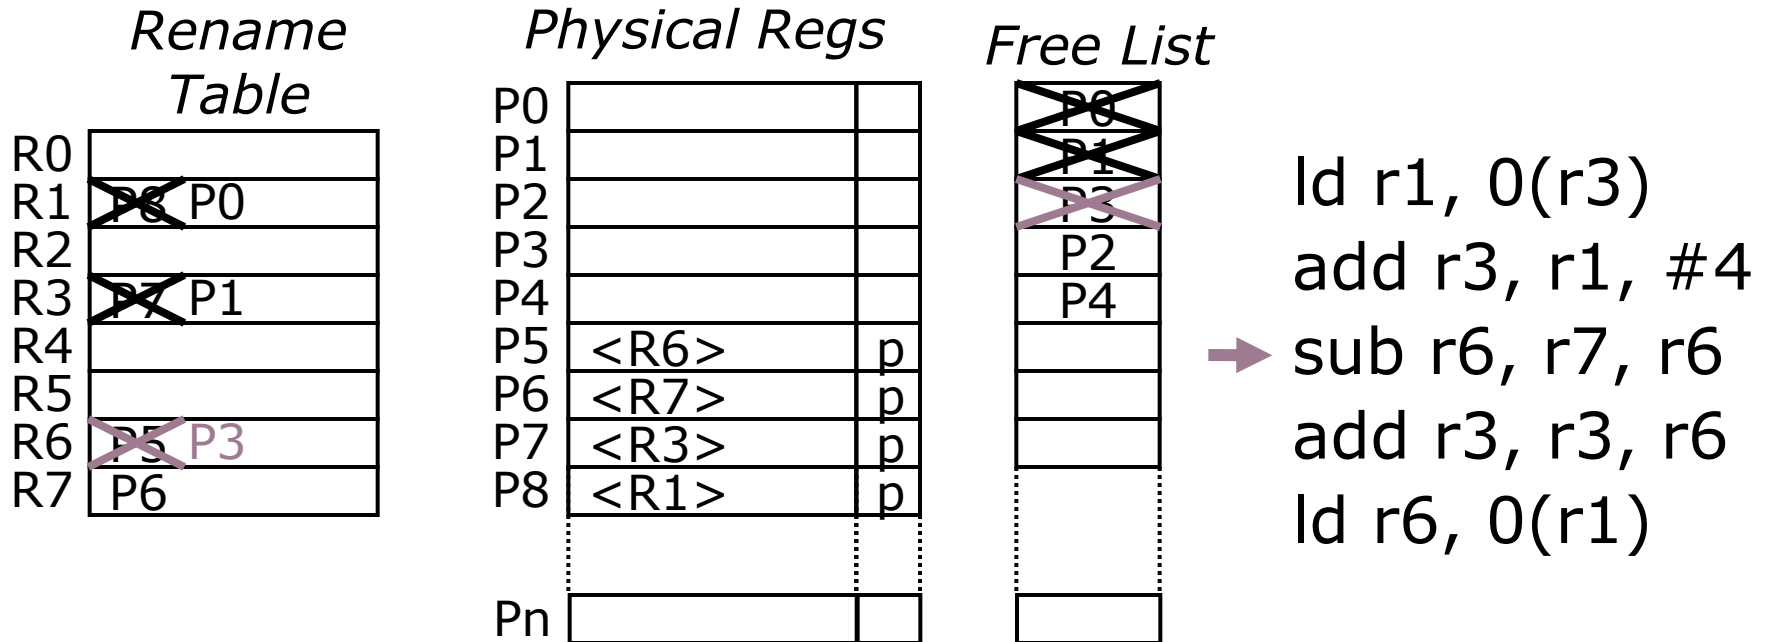

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3


# Physical Register Management

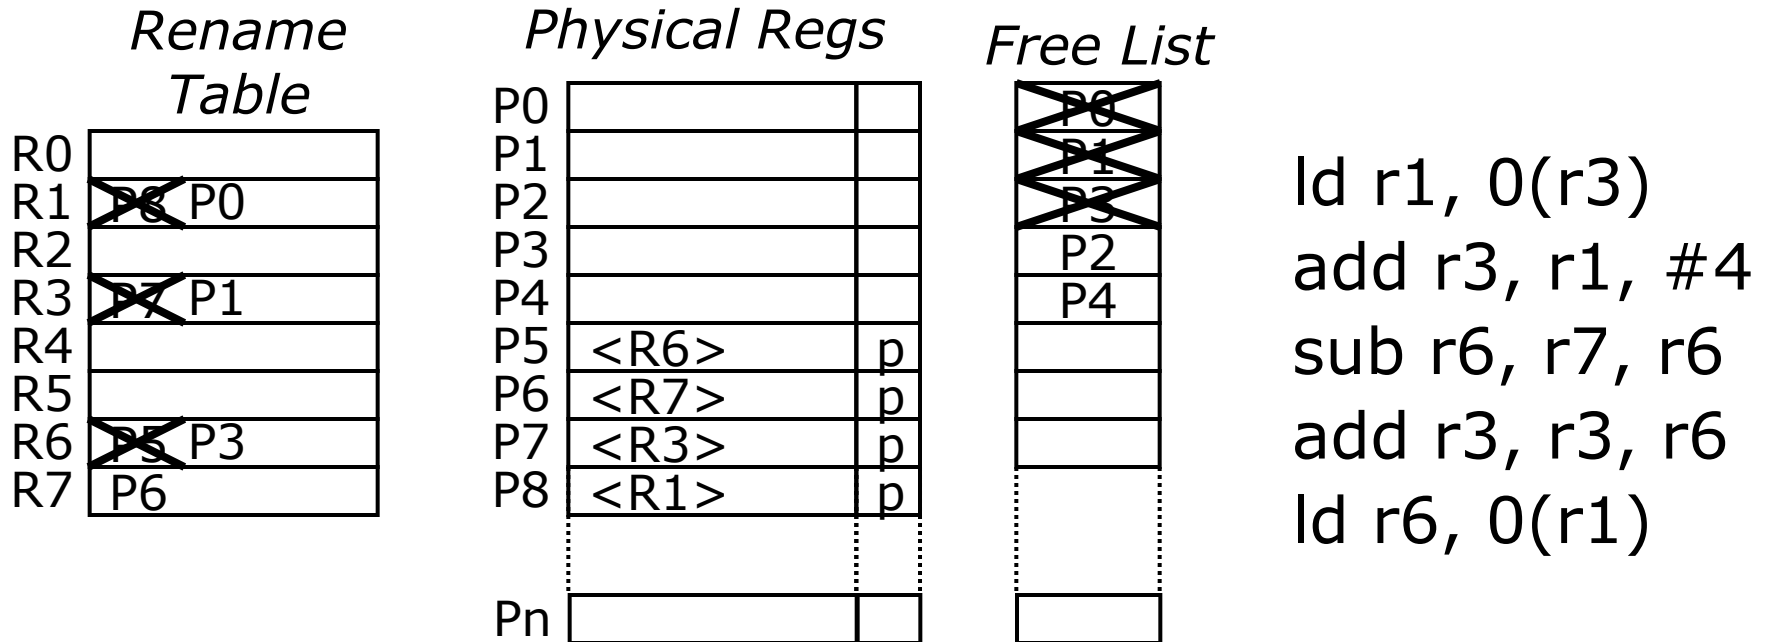

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3


# Physical Register Management

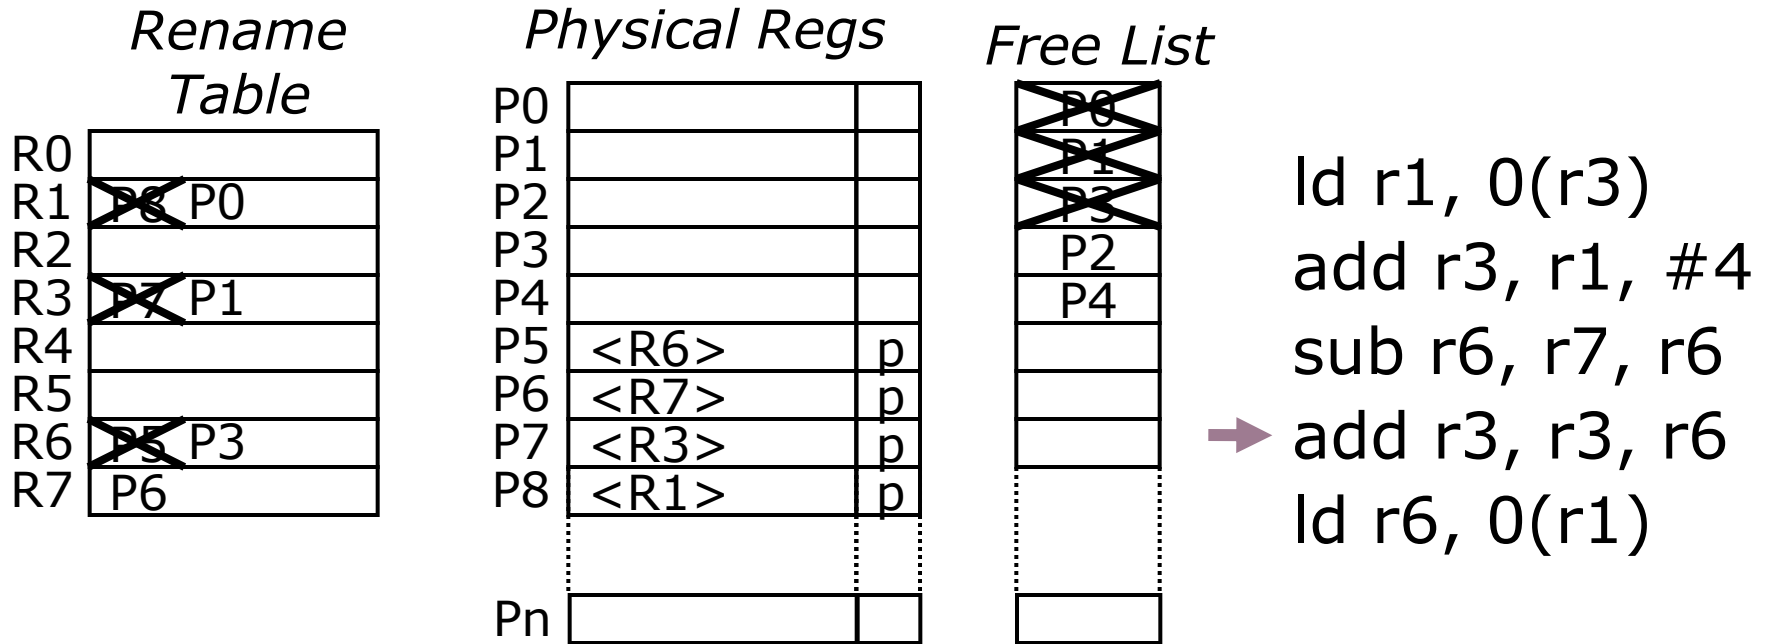

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3

# Physical Register Management

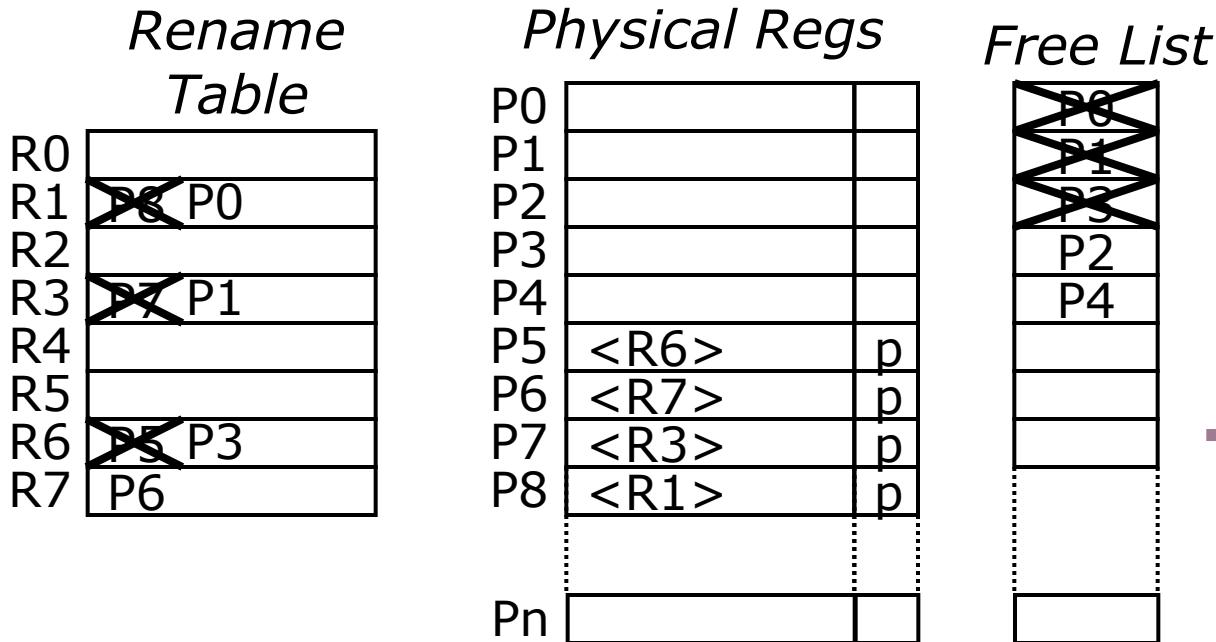


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
→ add r3, r3, r6
ld r6, 0(r1)
```

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3		


# Physical Register Management

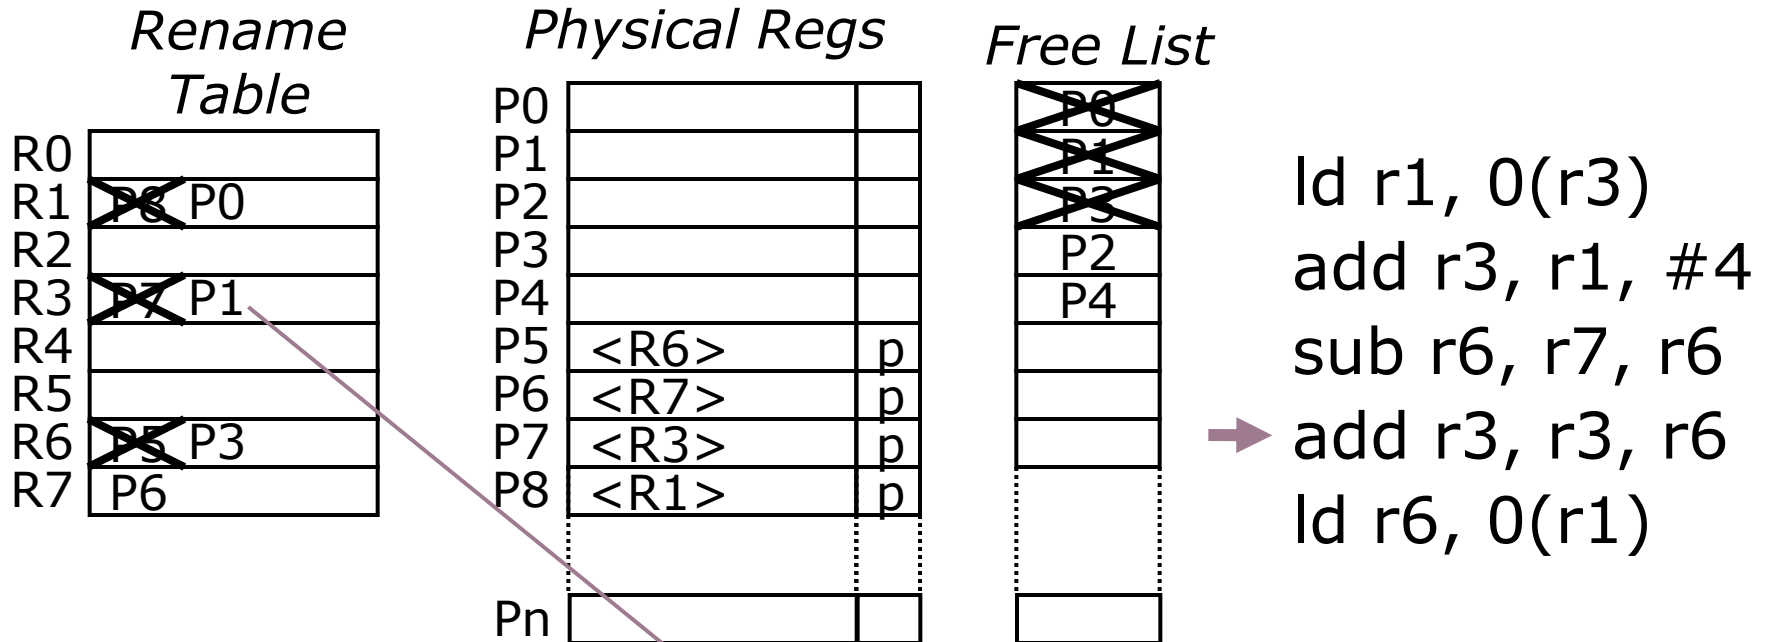

ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3		

# Physical Register Management

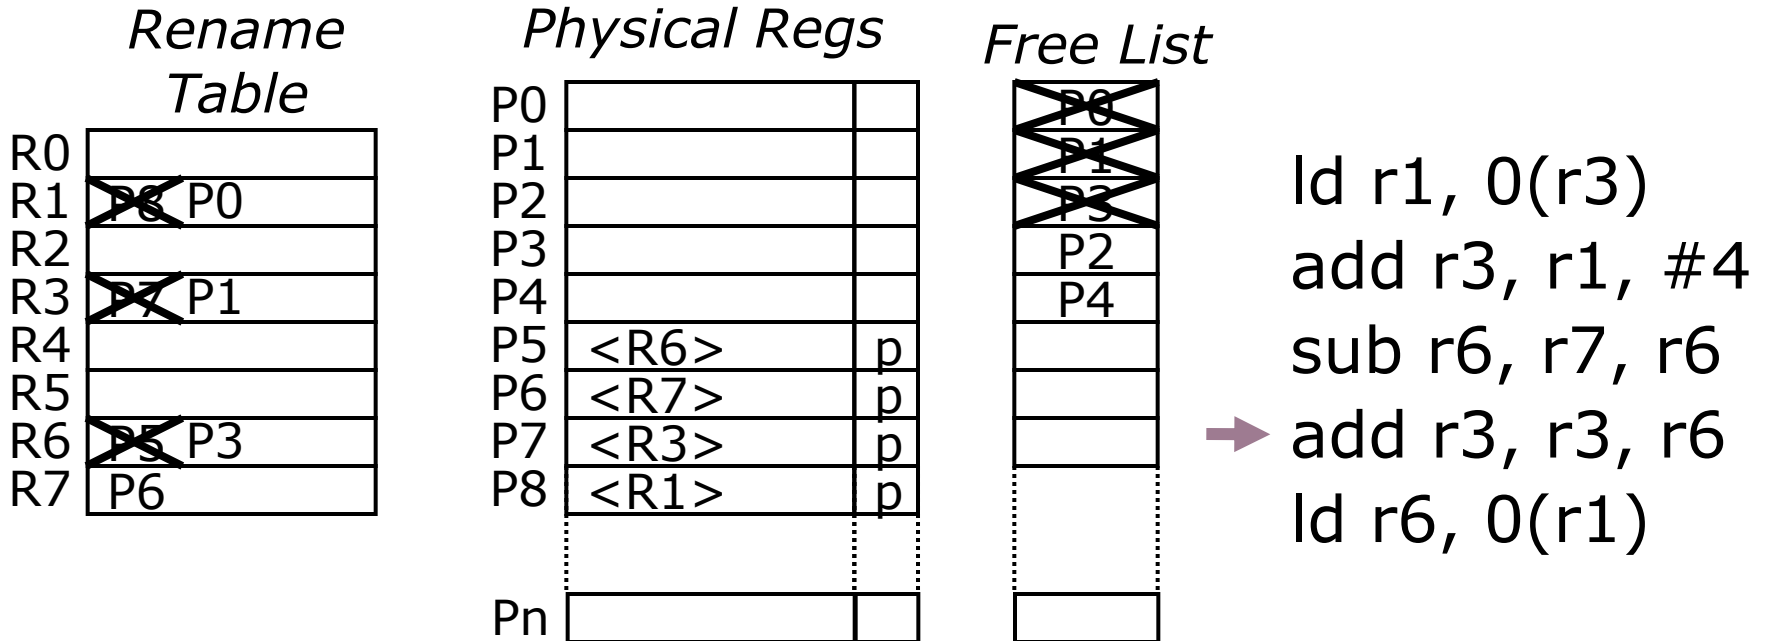


```

ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
→ add r3, r3, r6
ld r6, 0(r1)
  
```

ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X		ld	p	P7			r1	P8	P0
X		add		P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add		P1		P3	r3	P1	

# Physical Register Management

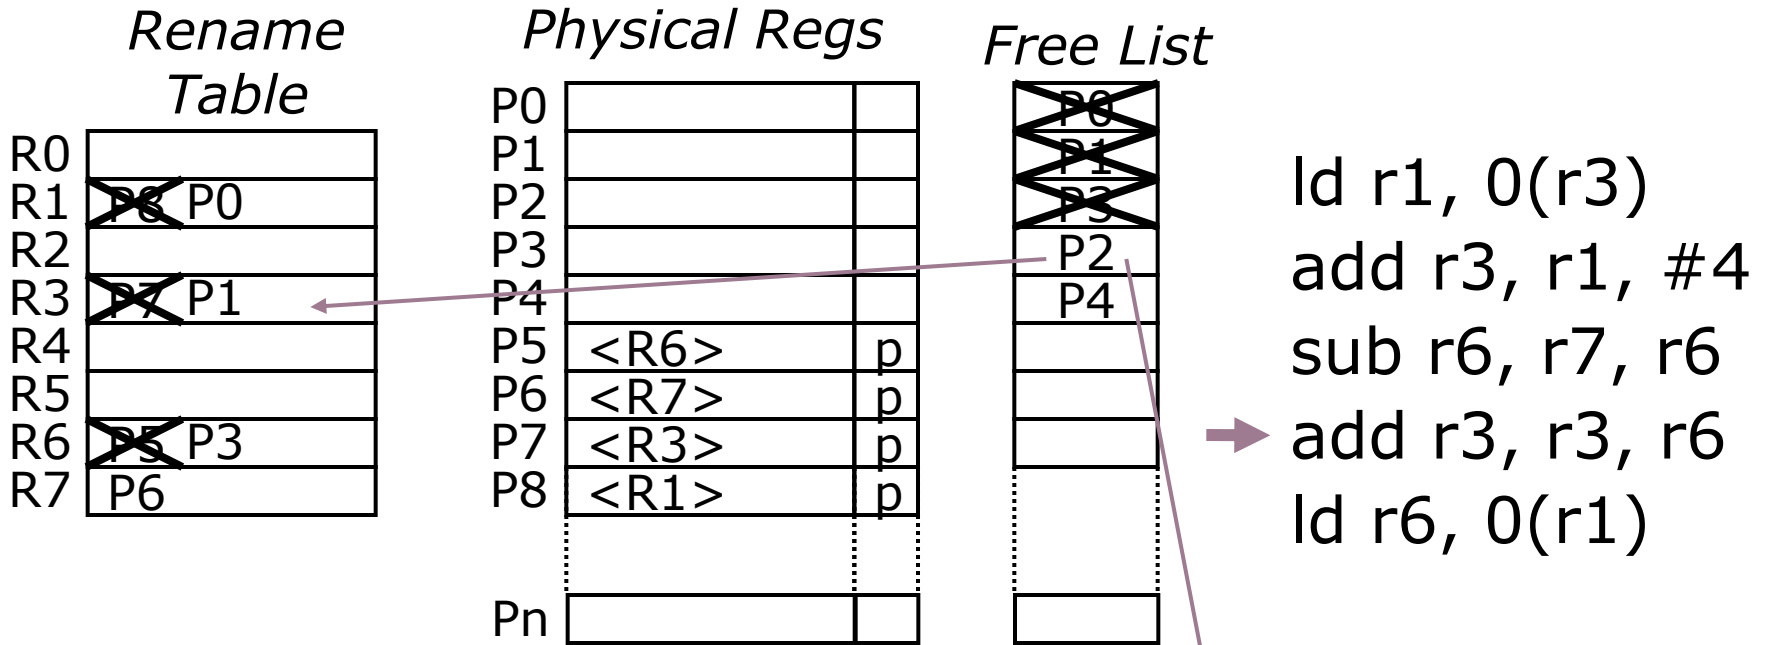


ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X		ld	p	P7			r1	P8	P0
X		add		P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add		P1		P3	r3	P1	



# Physical Register Management

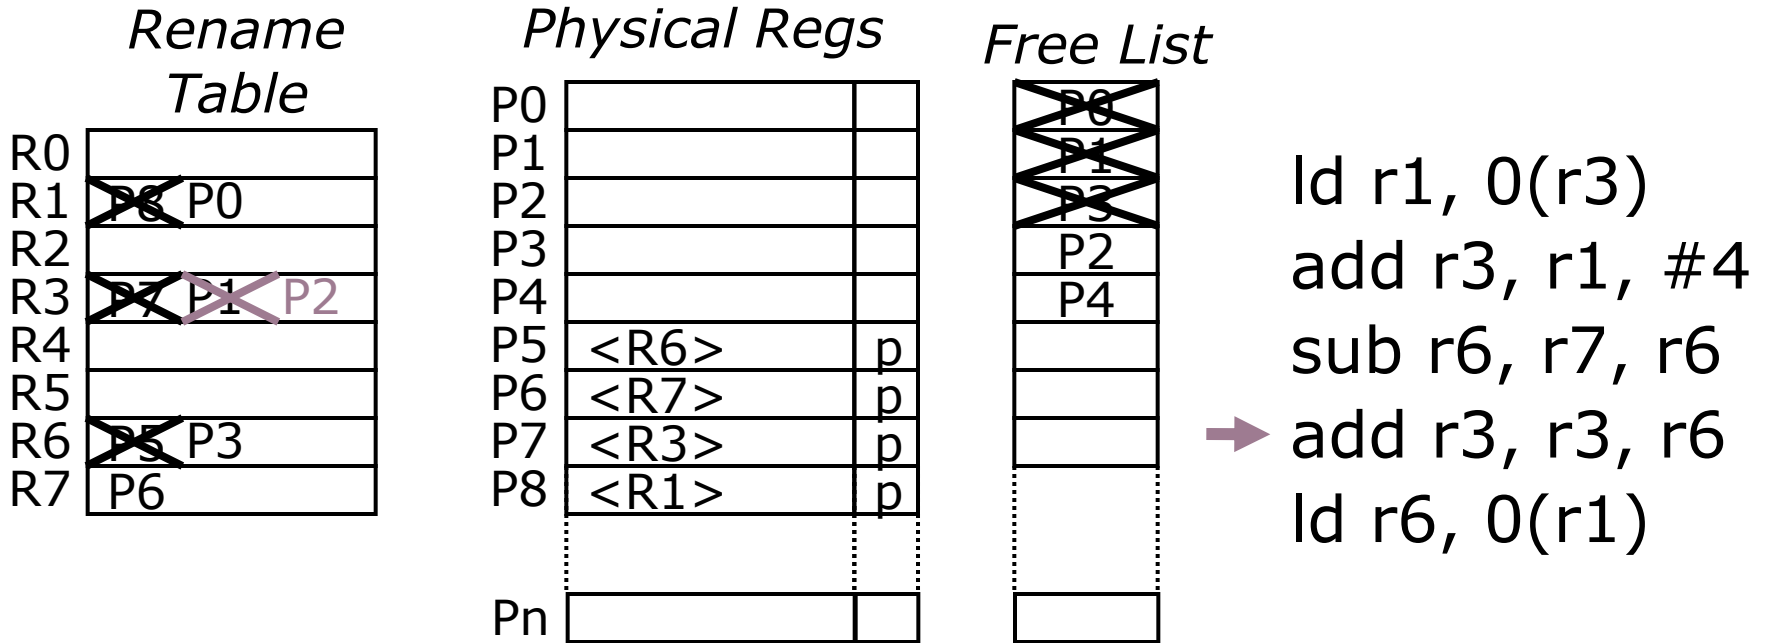

**ROB**

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
<i>x</i>		<i>add</i>		<i>P1</i>		<i>P3</i>	<i>r3</i>	<i>P1</i>	

# Physical Register Management

*Rename Table*

R0	
R1	<del>P0</del>
R2	
R3	<del>P7</del> <del>P1</del> P2
R4	
R5	
R6	<del>P5</del> P3
R7	P6

*Physical Regs*

P0		
P1		
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8	<R1>	p
Pn		

*Free List*


<del>P0</del>
<del>P1</del>
<del>P3</del>
P2
P4

ld r1, 0(r3)  
add r3, r1, #4  
sub r6, r7, r6  
→ add r3, r3, r6  
ld r6, 0(r1)

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X		ld	p	P7			r1	P8	P0
X		add		P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add		P1		P3	r3	P1	P2

# Physical Register Management

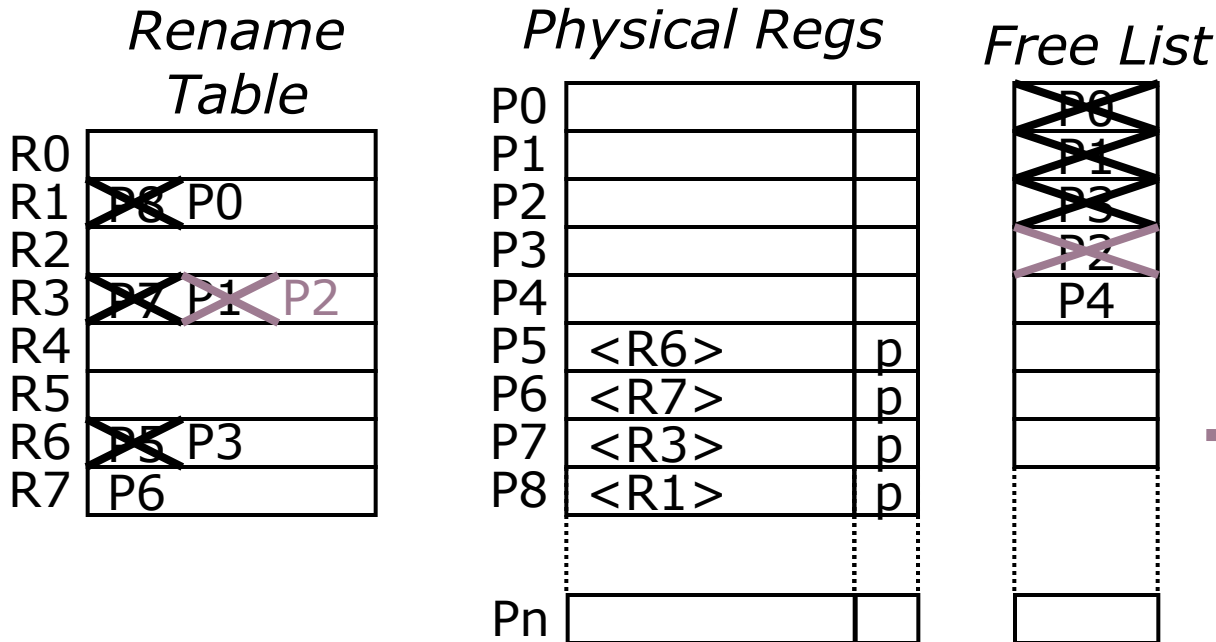


```

ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
→ add r3, r3, r6
ld r6, 0(r1)
  
```

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X		ld	p	P7			r1	P8	P0
X		add		P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add		P1		P3	r3	P1	P2

# Physical Register Management

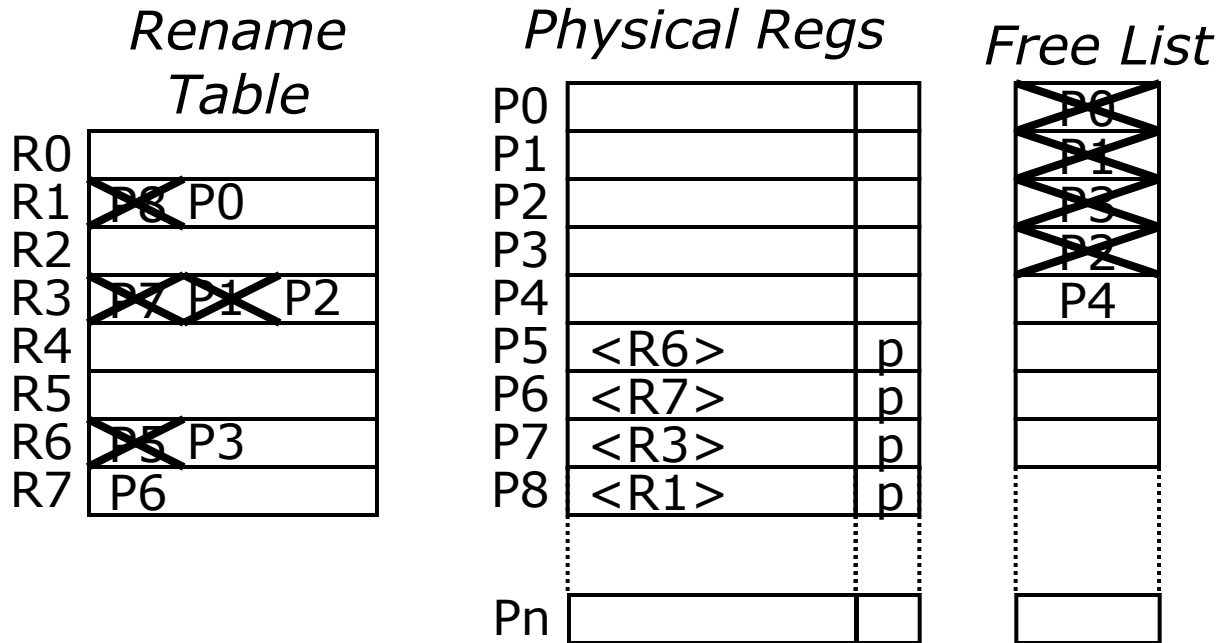


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2

# Physical Register Management

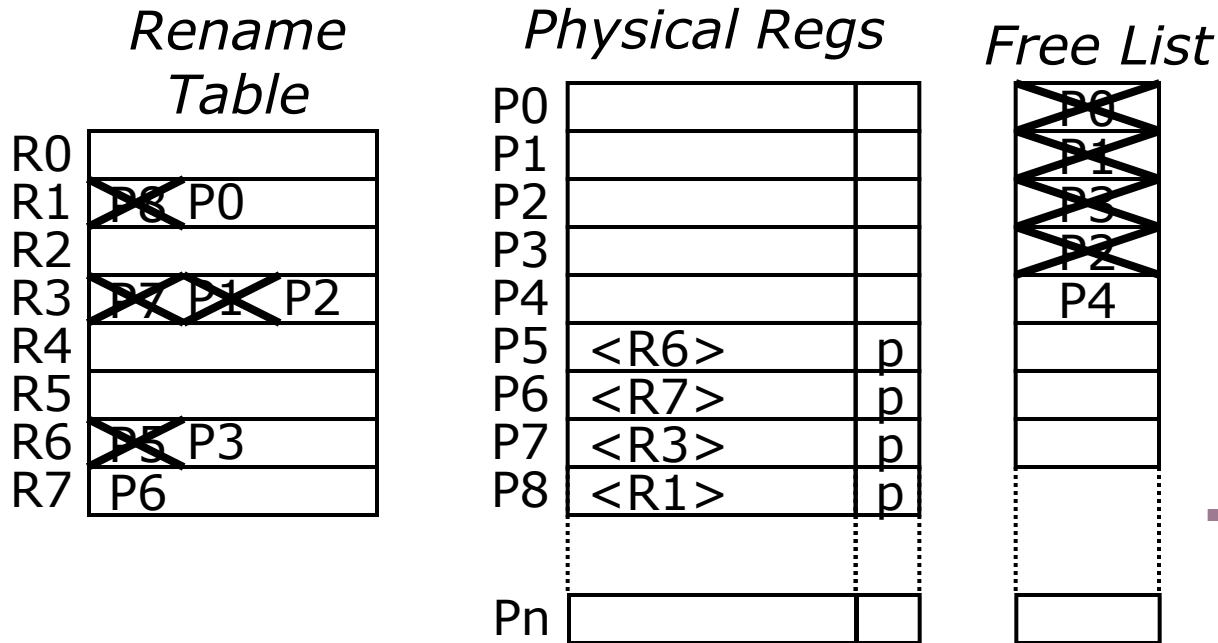


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
→ ld r6, 0(r1)
```

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2

# Physical Register Management

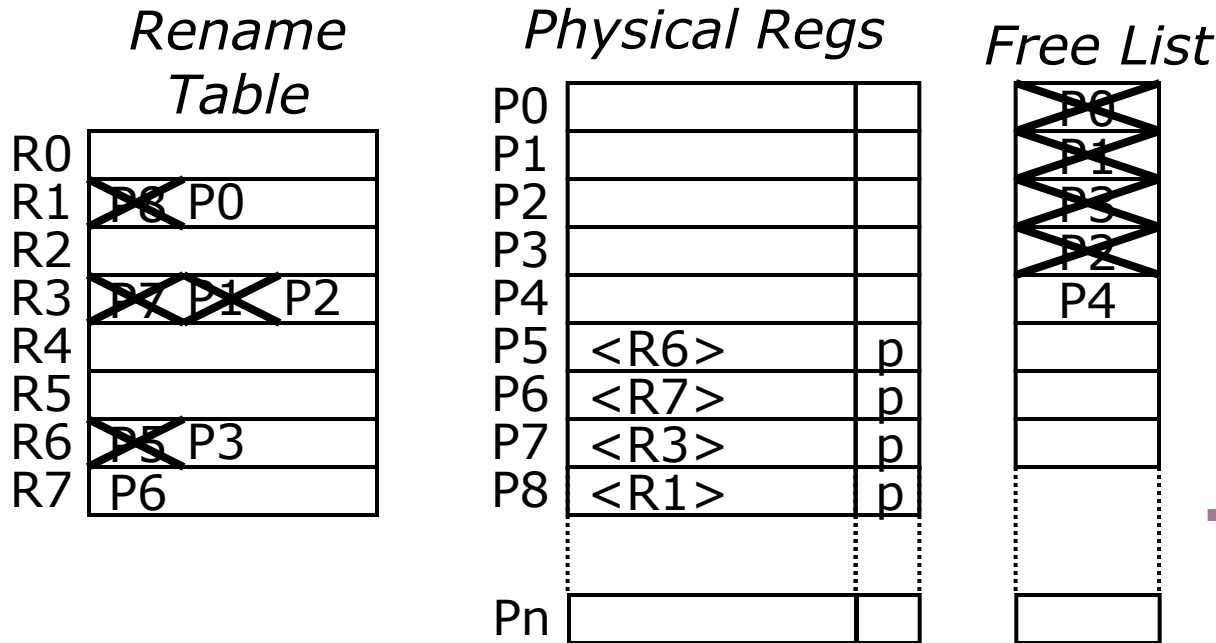


ld r1, 0(r3)  
 add r3, r1, #4  
 sub r6, r7, r6  
 add r3, r3, r6  
 → ld r6, 0(r1)

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld		P0			r6		


# Physical Register Management

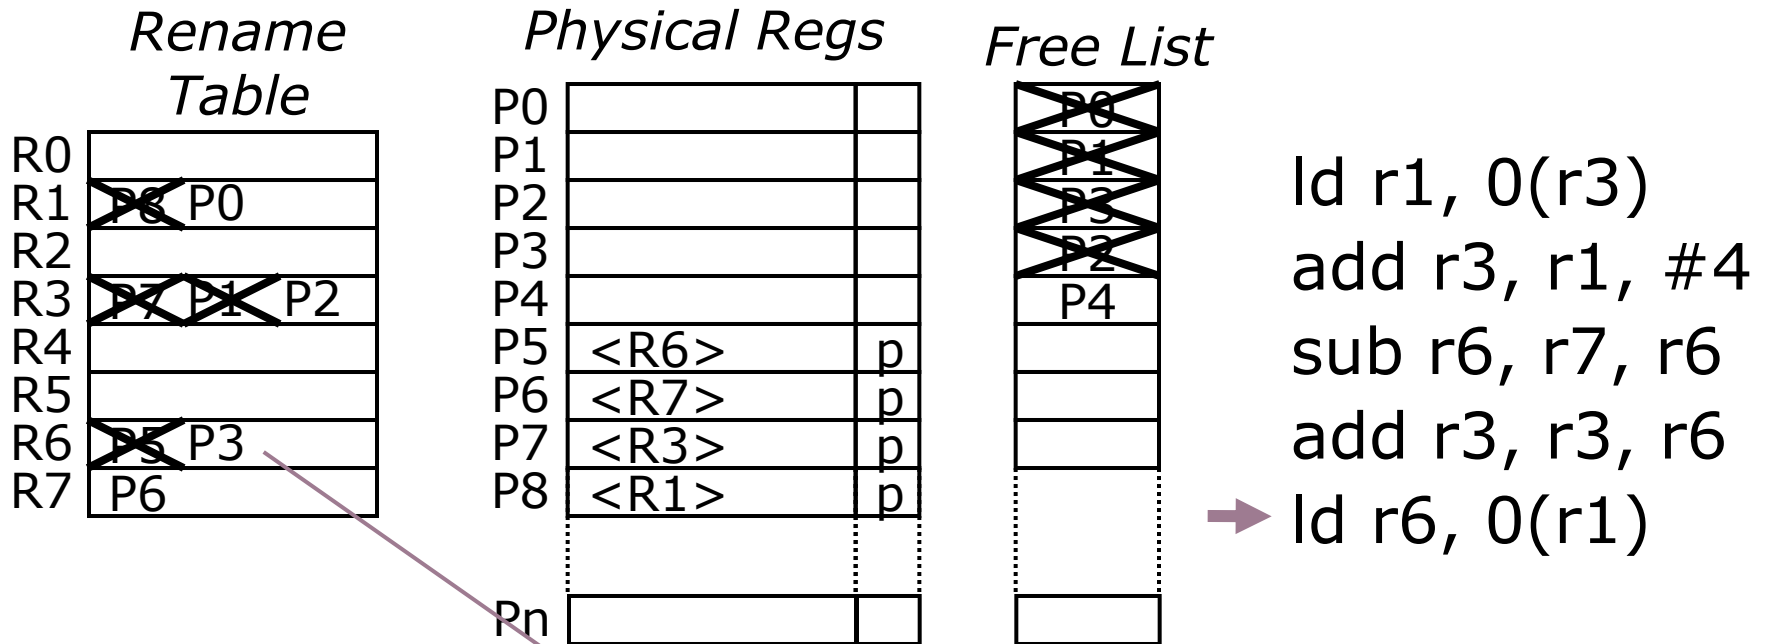

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld		P0			r6		

# Physical Register Management

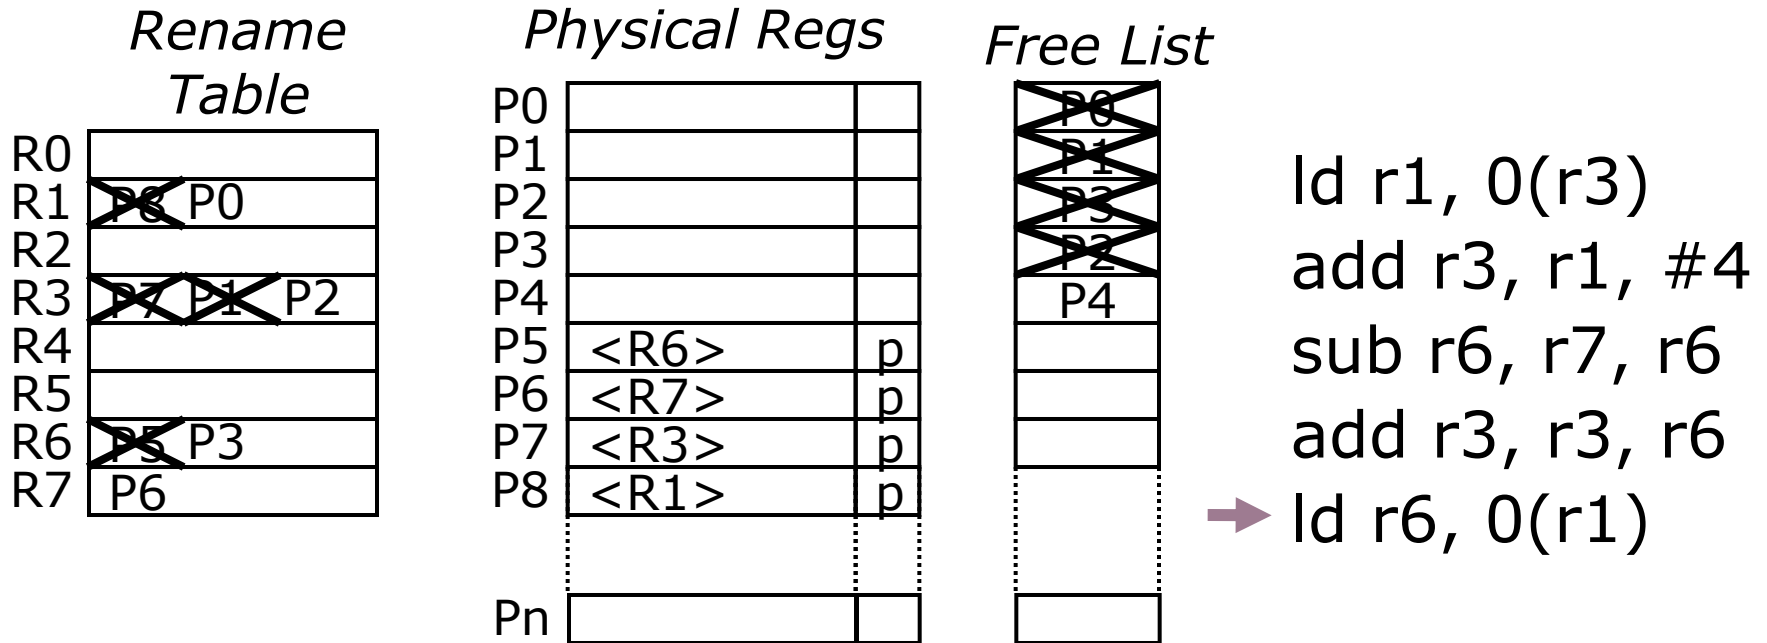


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
→ ld r6, 0(r1)
```

## ROB


use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld		P0			r6	P3	



# Physical Register Management

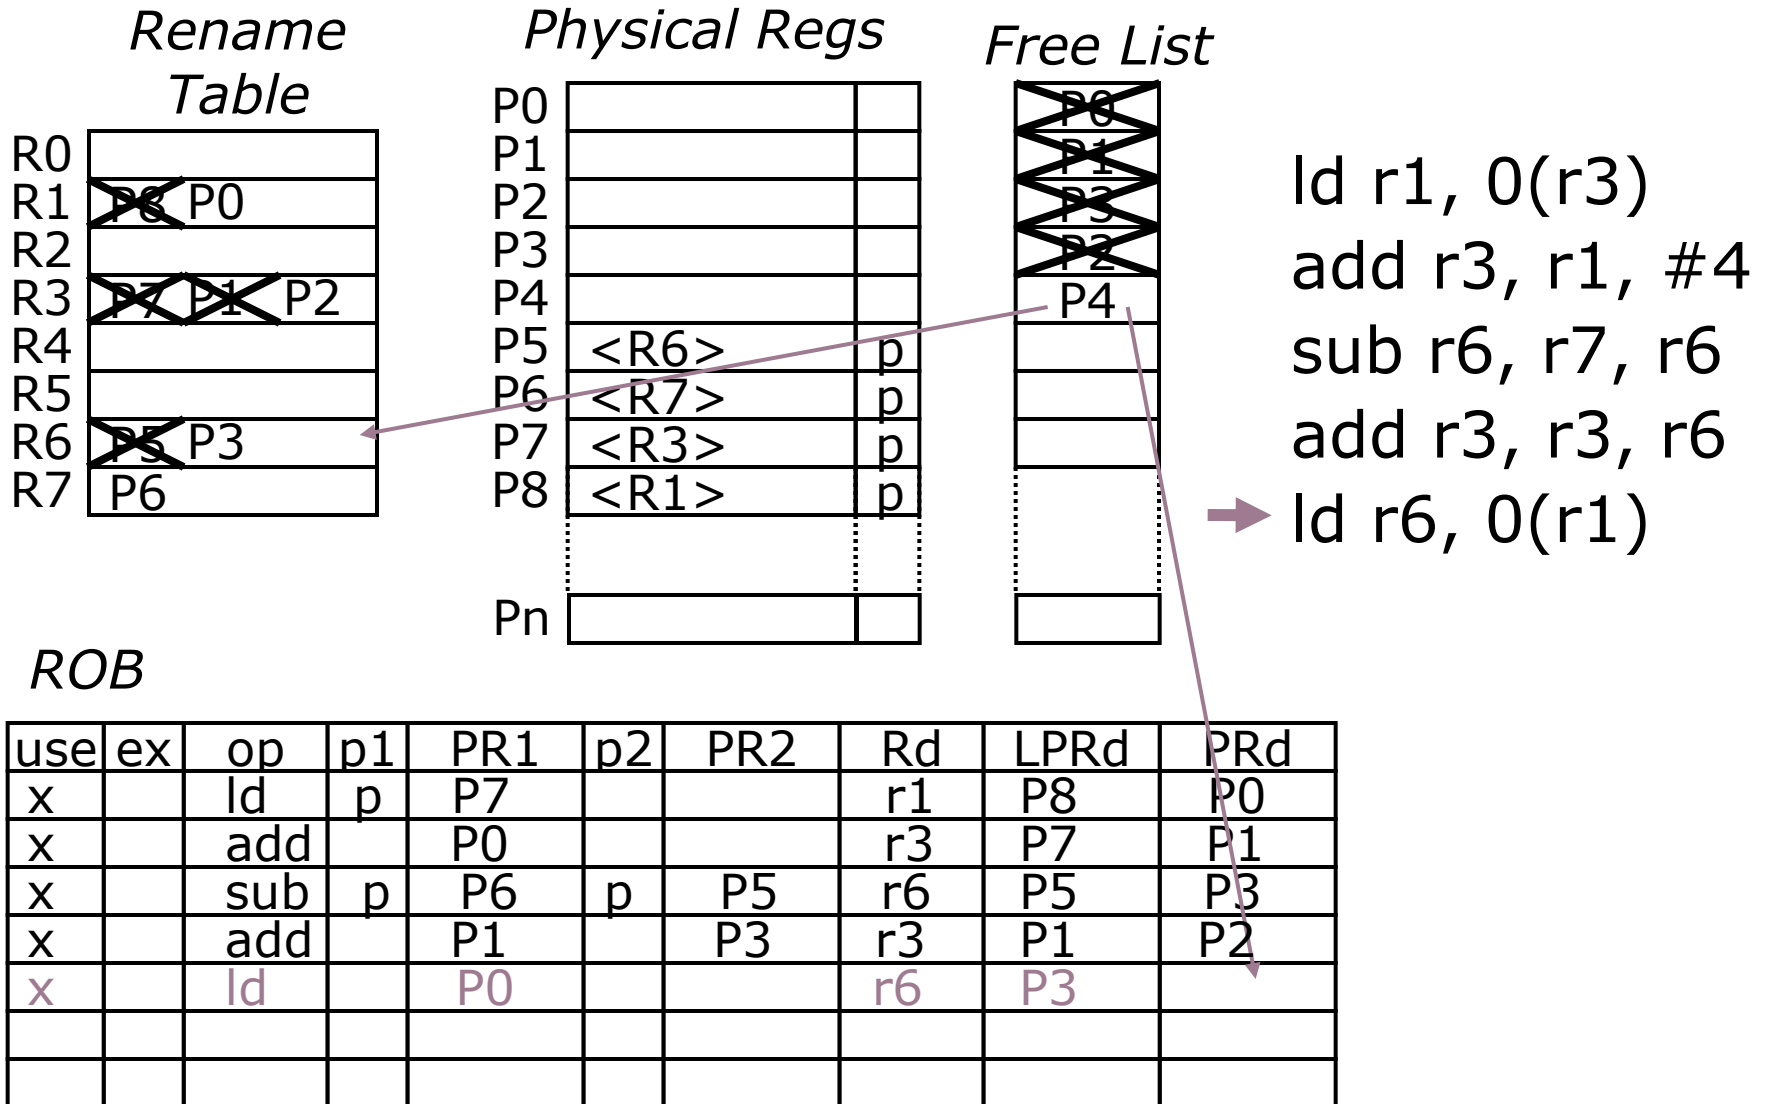

# Physical Register Management

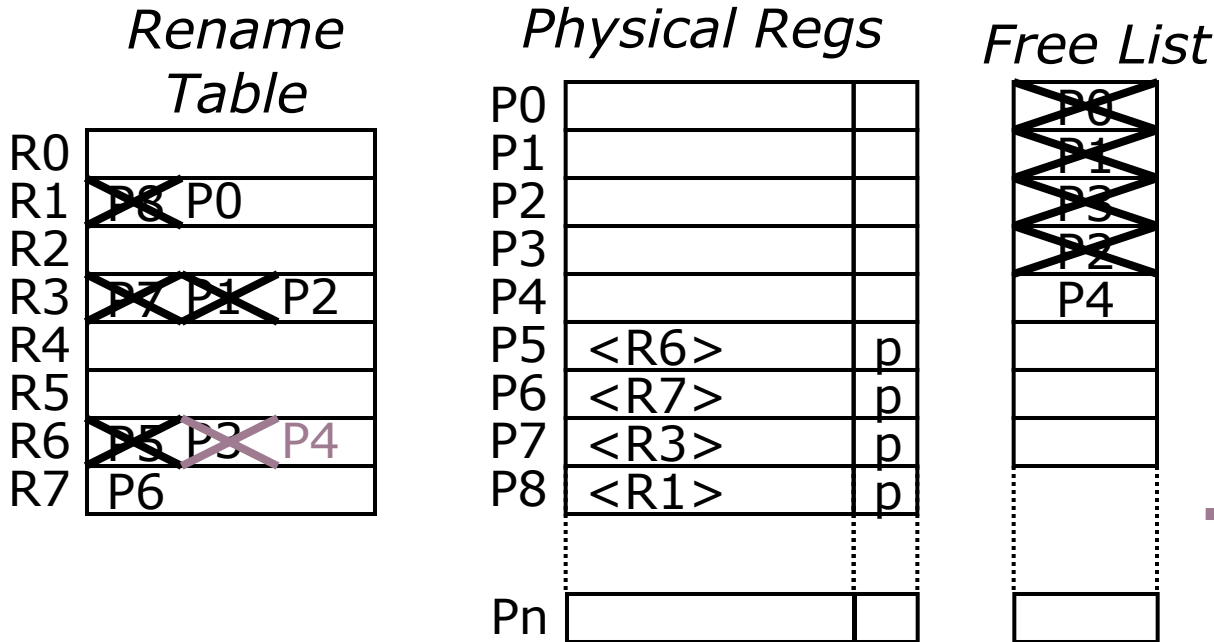


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
→ ld r6, 0(r1)
```

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld		P0			r6	P3	


# Physical Register Management

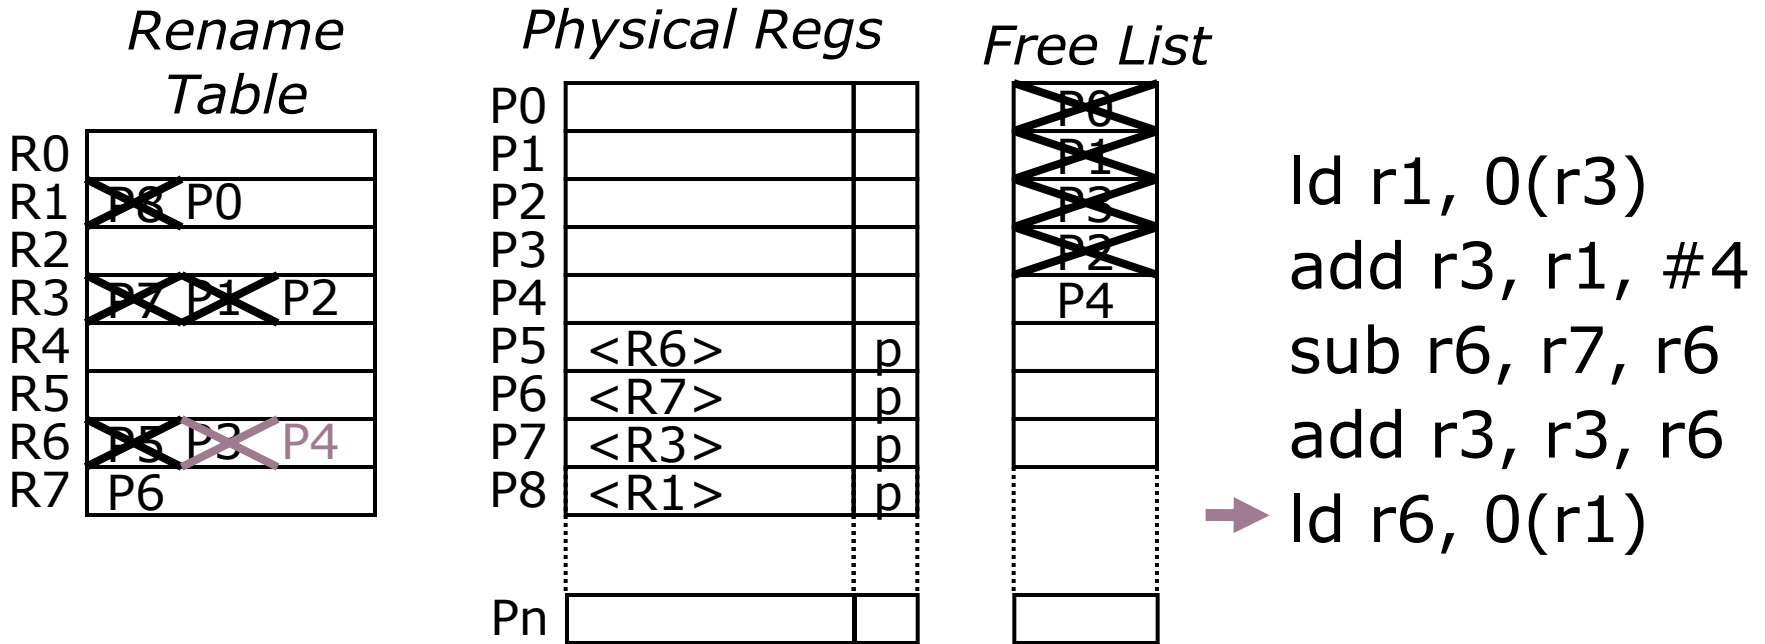

### ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
<b>x</b>		<b>ld</b>		<b>P0</b>			<b>r6</b>	<b>P3</b>	<b>P4</b>

# Physical Register Management

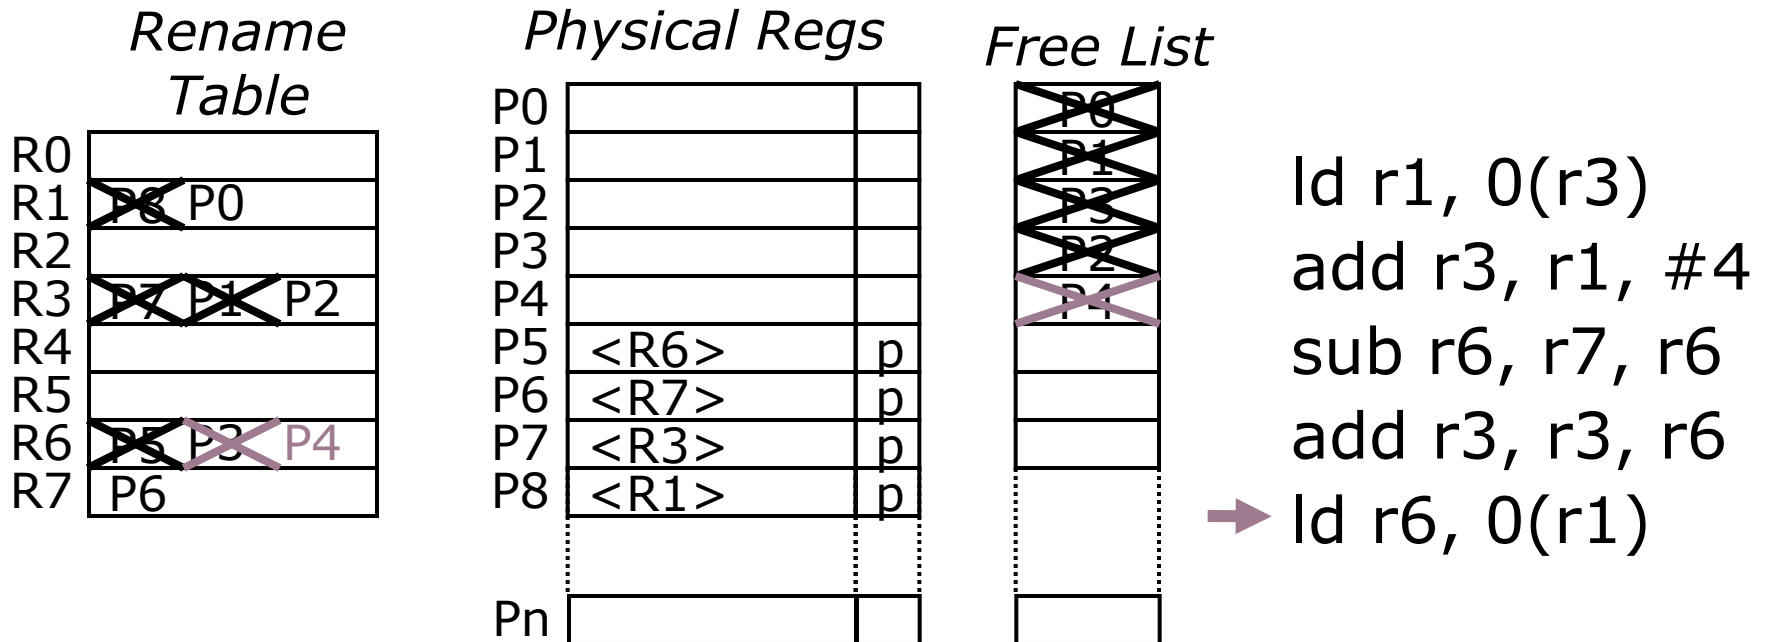

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld		P0			r6	P3	P4

# Physical Register Management

*Rename Table*

R0	
R1	<del>P0</del>
R2	
R3	<del>P1</del> <del>P2</del>
R4	
R5	
R6	<del>P3</del> <del>P4</del>
R7	P6

*Physical Regs*

P0		
P1		
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8	<R1>	p
Pn		

*Free List*


<del>P0</del>
<del>P1</del>
<del>P3</del>
<del>P2</del>
<del>P4</del>

```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld		P0			r6	P3	P4

# Physical Register Management

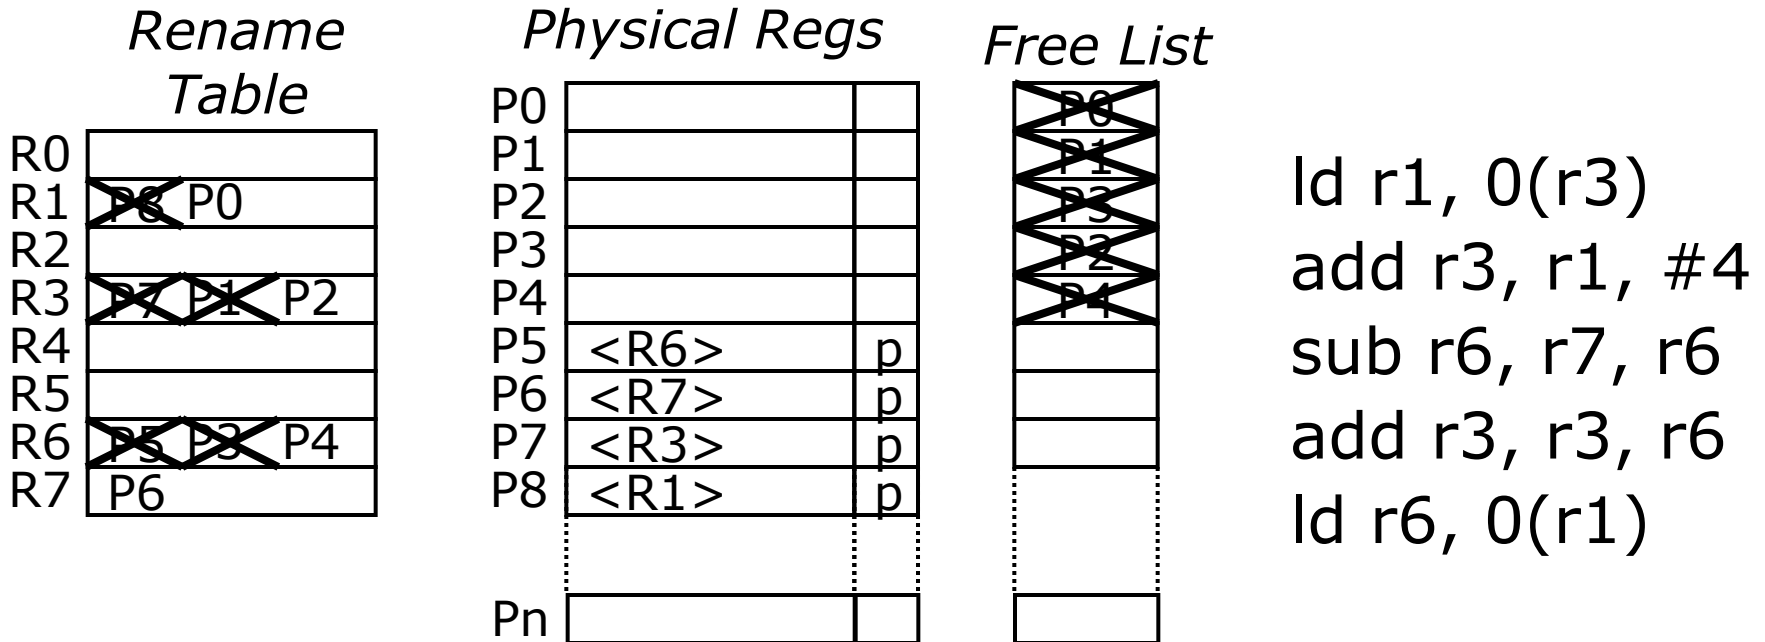


*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld		P0			r6	P3	P4

← Execute & Commit

# Physical Register Management

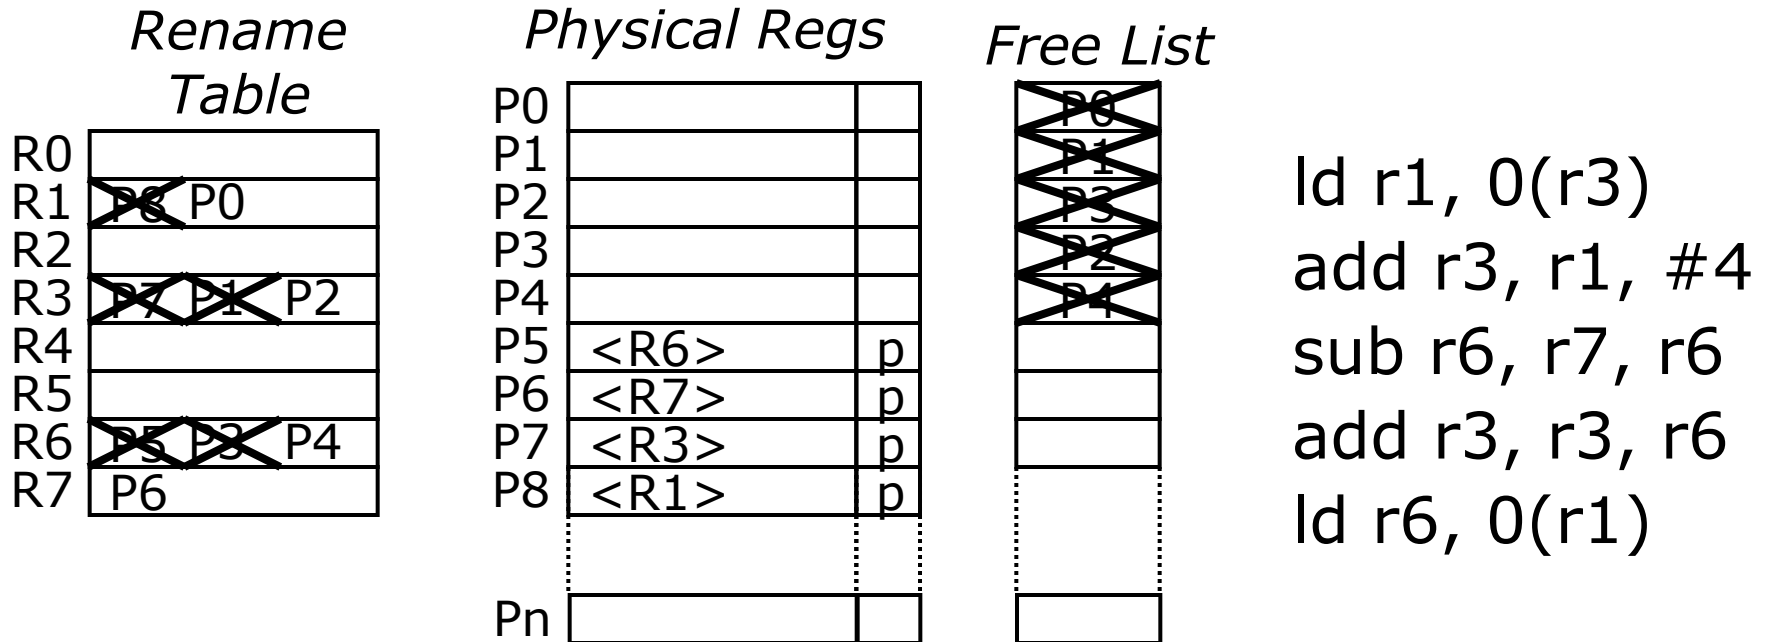


*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld		P0			r6	P3	P4

Execute & Commit

# Physical Register Management

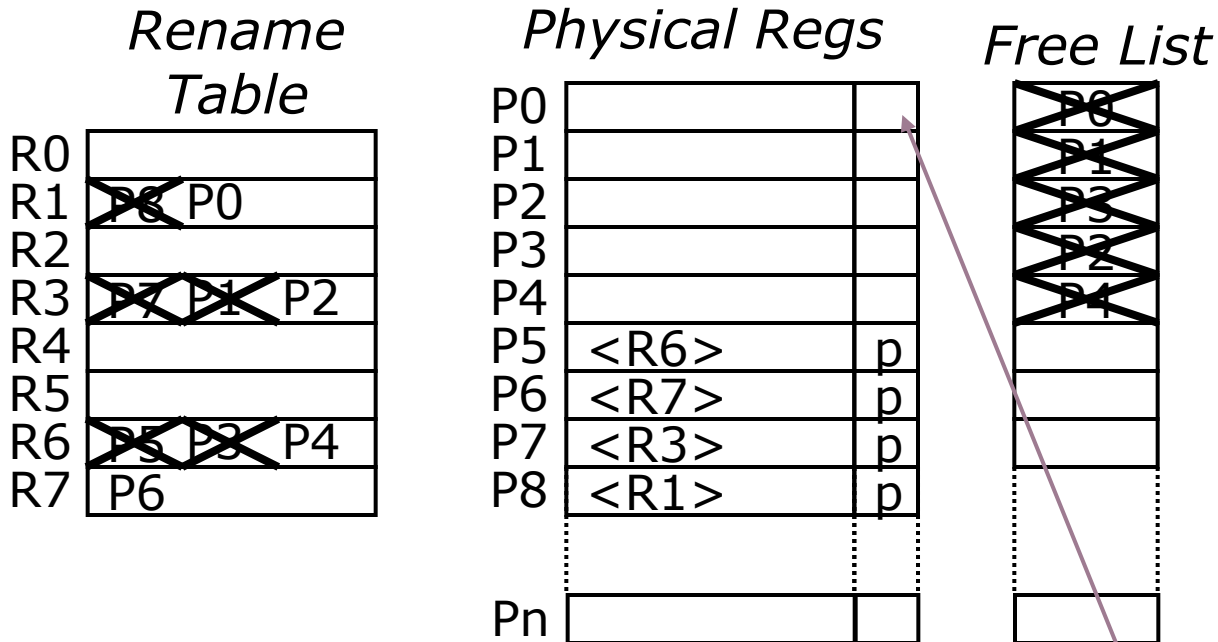

```

ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)

```


**ROB**

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add		P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld		P0			r6	P3	P4

Execute & Commit



# Physical Register Management

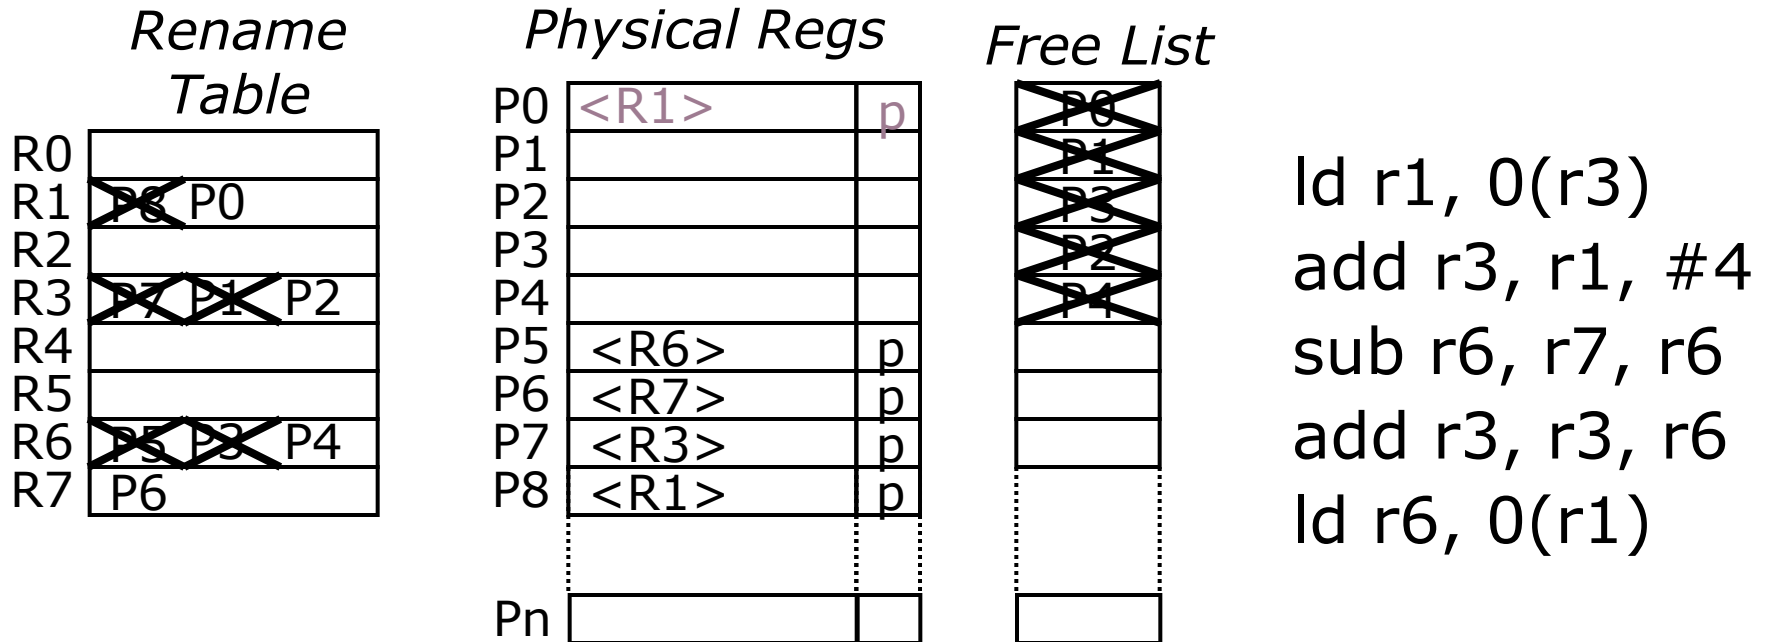


*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x		ld	p	P7			r1	P8	P0
x		add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

Execute & Commit

# Physical Register Management

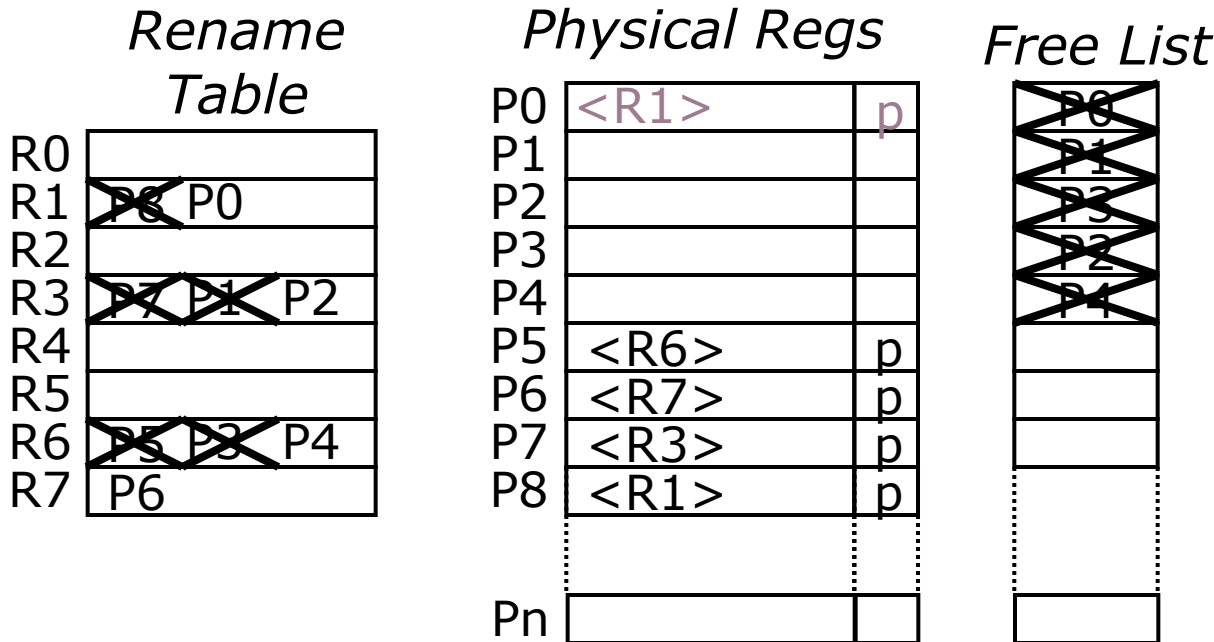


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x	x	ld	p	P7			r1	P8	P0
x		add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

Execute & Commit

# Physical Register Management

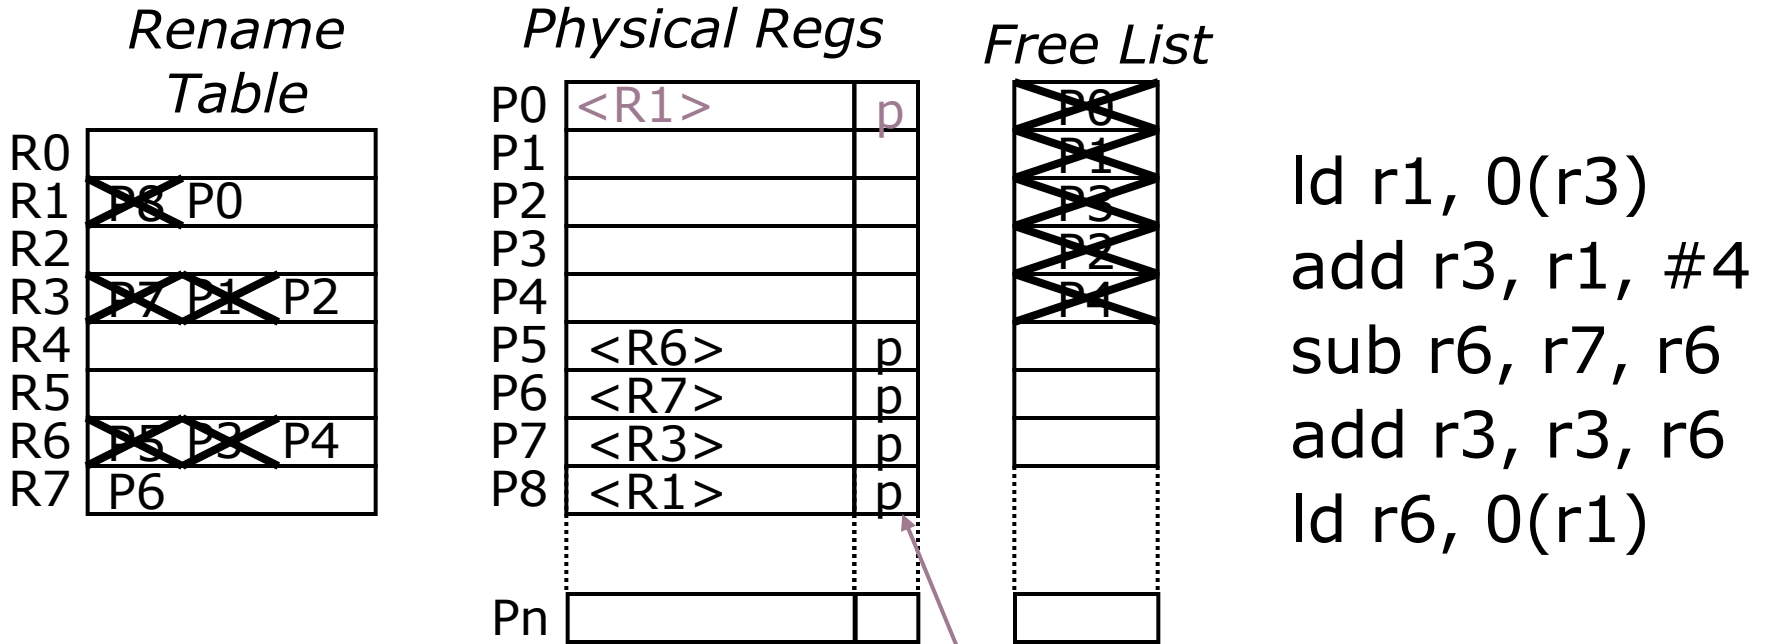


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x	x	ld	p	P7			r1	P8	P0
x		add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

Execute & Commit ←

# Physical Register Management

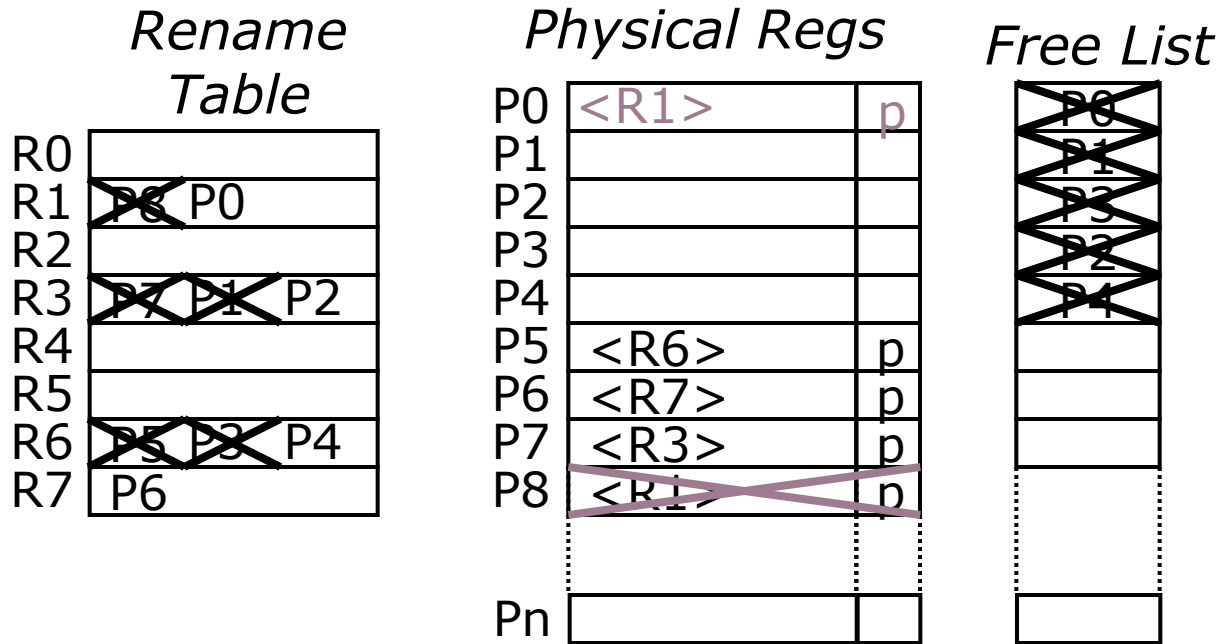

```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x	x	ld	p	P7			r1	P8	P0
x		add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

Execute & Commit



# Physical Register Management

*Rename Table*

R0	
R1	<del>P0</del>
R2	
R3	<del>P7</del> <del>P1</del> <del>P2</del>
R4	
R5	
R6	<del>P5</del> <del>P3</del> <del>P4</del>
R7	P6

*Physical Regs*

P0	<R1>	p
P1		
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8	<del>&lt;R1&gt;</del>	<del>p</del>
...		
Pn		

*Free List*

<del>P0</del>
<del>P1</del>
<del>P3</del>
<del>P2</del>
<del>P4</del>

ld r1, 0(r3)  
 add r3, r1, #4  
 sub r6, r7, r6  
 add r3, r3, r6  
 ld r6, 0(r1)

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x	x	ld	p	P7			r1	P8	P0
x		add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

Execute & Commit

# Physical Register Management

*Rename Table*

R0	
R1	<del>P0</del>
R2	
R3	<del>P7 P1 P2</del>
R4	
R5	
R6	<del>P5 P3 P4</del>
R7	P6

*Physical Regs*

P0	<R1>	p
P1		
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8	<del>&lt;R1&gt;</del>	<del>p</del>
...		
Pn		

*Free List*

<del>P0</del>
<del>P1</del>
<del>P3</del>
<del>P2</del>
<del>P4</del>
P8
...


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x	x	ld	p	P7			r1	P8	P0
x		add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

← Execute & Commit

# Physical Register Management

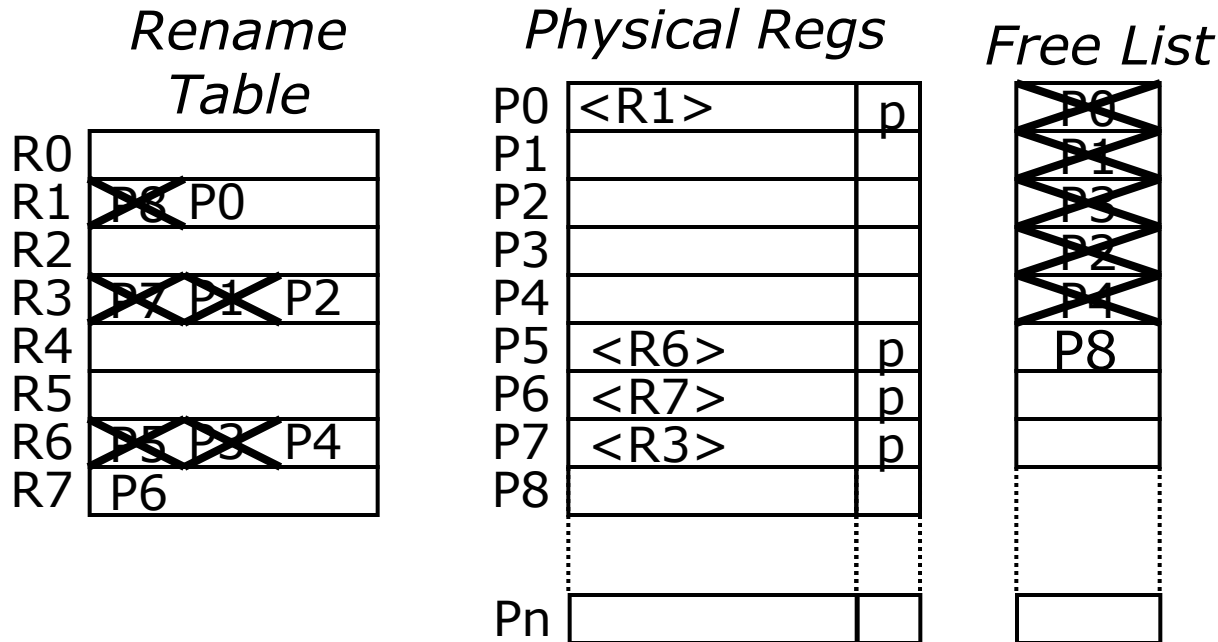


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x	x	ld	p	P7			r1	P8	P0
x		add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

# Physical Register Management

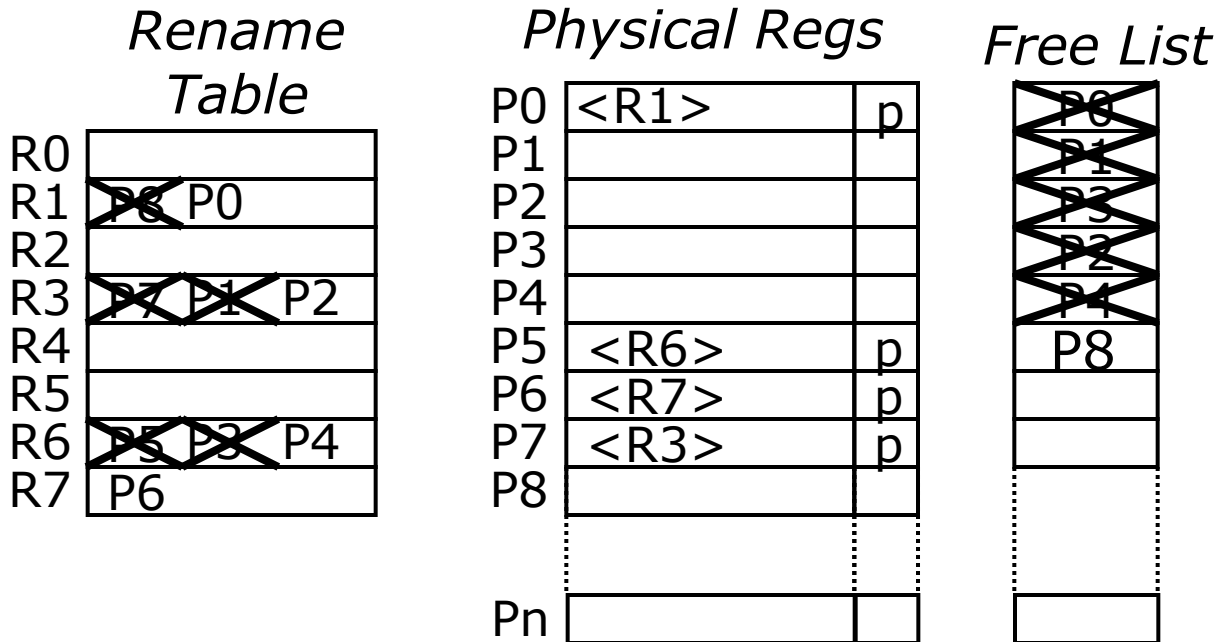

```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```


*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x	x	ld	p	P7			r1	P8	P0
x		add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add		P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

Execute & Commit



# Physical Register Management

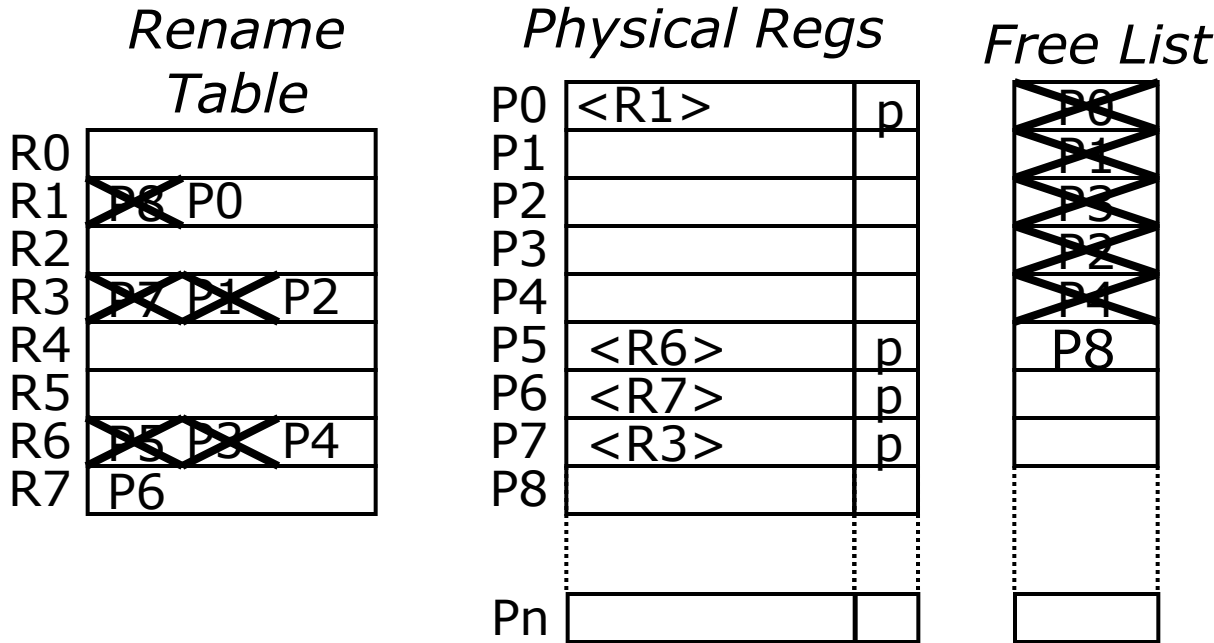


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X	X	ld	p	P7			r1	P8	P0
X		add	p	P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add		P1		P3	r3	P1	P2
X		ld	p	P0			r6	P3	P4

Execute & Commit

# Physical Register Management

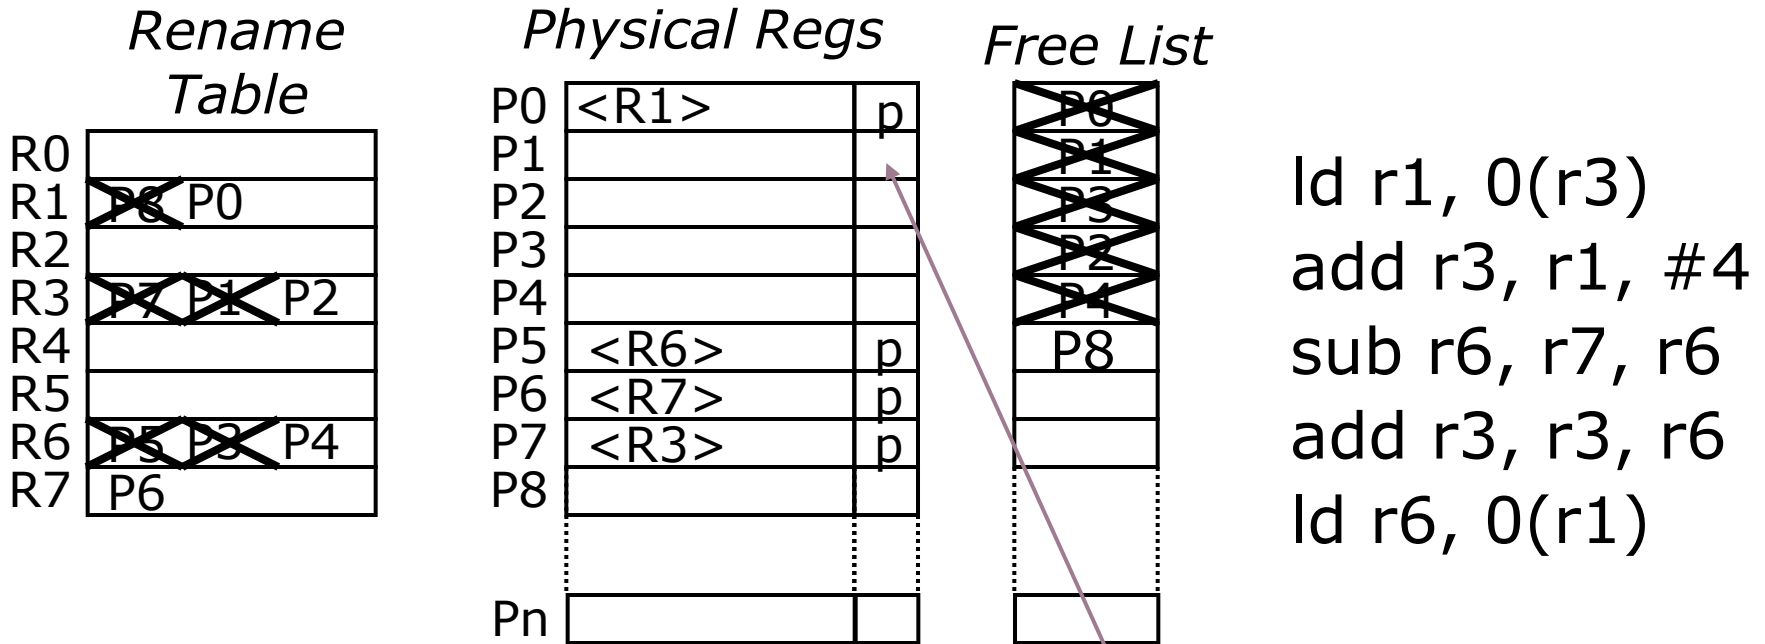

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X	X	ld	p	P7			r1	P8	P0
X		add	p	P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add		P1		P3	r3	P1	P2
X		ld	p	P0			r6	P3	P4

Execute & Commit



# Physical Register Management

*Rename Table*

R0	
R1	<del>P0</del>
R2	
R3	<del>P1</del> <del>P2</del>
R4	
R5	
R6	<del>P3</del> <del>P4</del>
R7	P6

*Physical Regs*

P0	<R1>	p
P1	<R3>	p
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8		
...		
Pn		

*Free List*

<del>P0</del>
<del>P1</del>
<del>P3</del>
<del>P2</del>
<del>P4</del>
P8
...


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x	x	ld	p	P7			r1	P8	P0
x		add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add	p	P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

Execute & Commit

# Physical Register Management

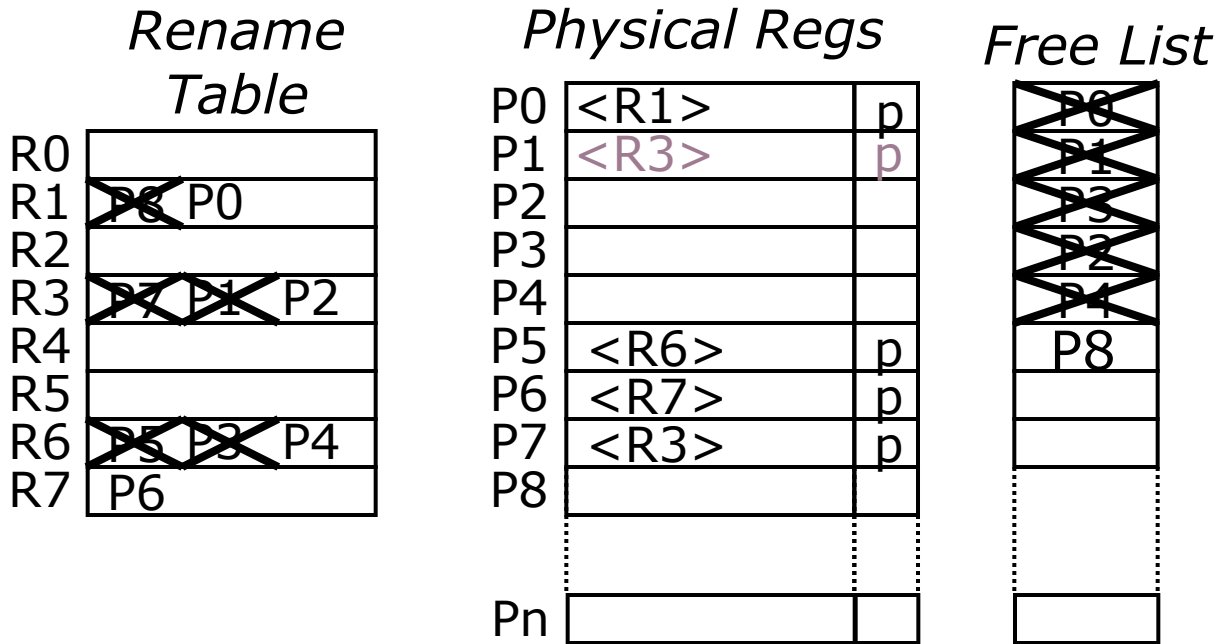


```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X	X	ld	p	P7			r1	P8	P0
X	X	add	p	P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add	p	P1		P3	r3	P1	P2
X		ld	p	P0			r6	P3	P4

Execute & Commit ←

# Physical Register Management

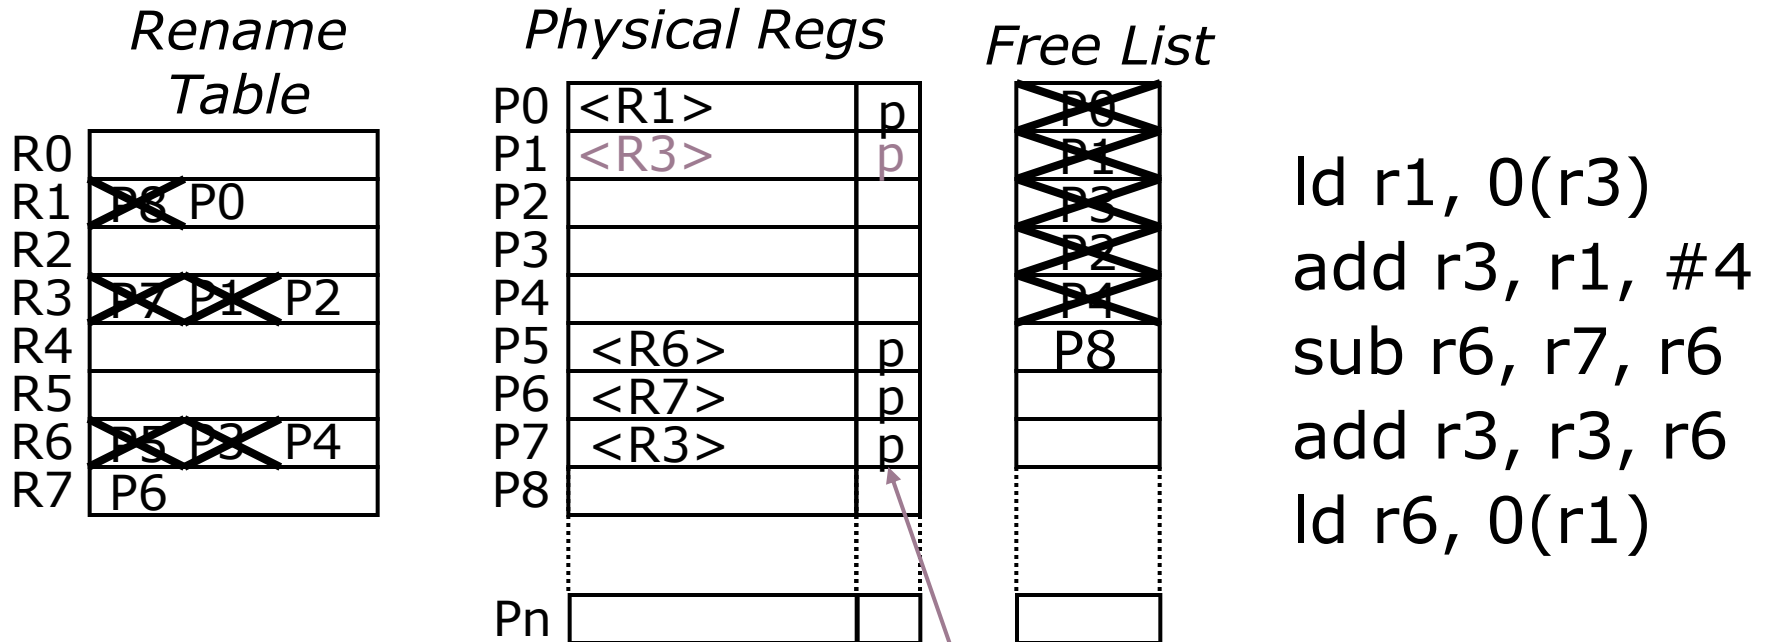

## ROB

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X	X	ld	p	P7			r1	P8	P0
X	X	add	p	P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add	p	P1		P3	r3	P1	P2
X		ld	p	P0			r6	P3	P4

Execute & Commit

# Physical Register Management

*Rename Table*

R0	
R1	<del>P0</del>
R2	
R3	<del>P7 P1 P2</del>
R4	
R5	
R6	<del>P5 P3 P4</del>
R7	P6

*Physical Regs*

P0	<R1>	p
P1	<R3>	p
P2		
P3		
P4		
P5	<R6>	p
P6	<R7>	p
P7	<R3>	p
P8		
...		
Pn		

*Free List*

<del>P0</del>
<del>P1</del>
<del>P3</del>
<del>P2</del>
<del>P4</del>
P8


ld r1, 0(r3)  
 add r3, r1, #4  
 sub r6, r7, r6  
 add r3, r3, r6  
 ld r6, 0(r1)

*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
x	x	ld	p	P7			r1	P8	P0
x	x	add	p	P0			r3	P7	P1
x		sub	p	P6	p	P5	r6	P5	P3
x		add	p	P1		P3	r3	P1	P2
x		ld	p	P0			r6	P3	P4

← Execute & Commit

# Physical Register Management

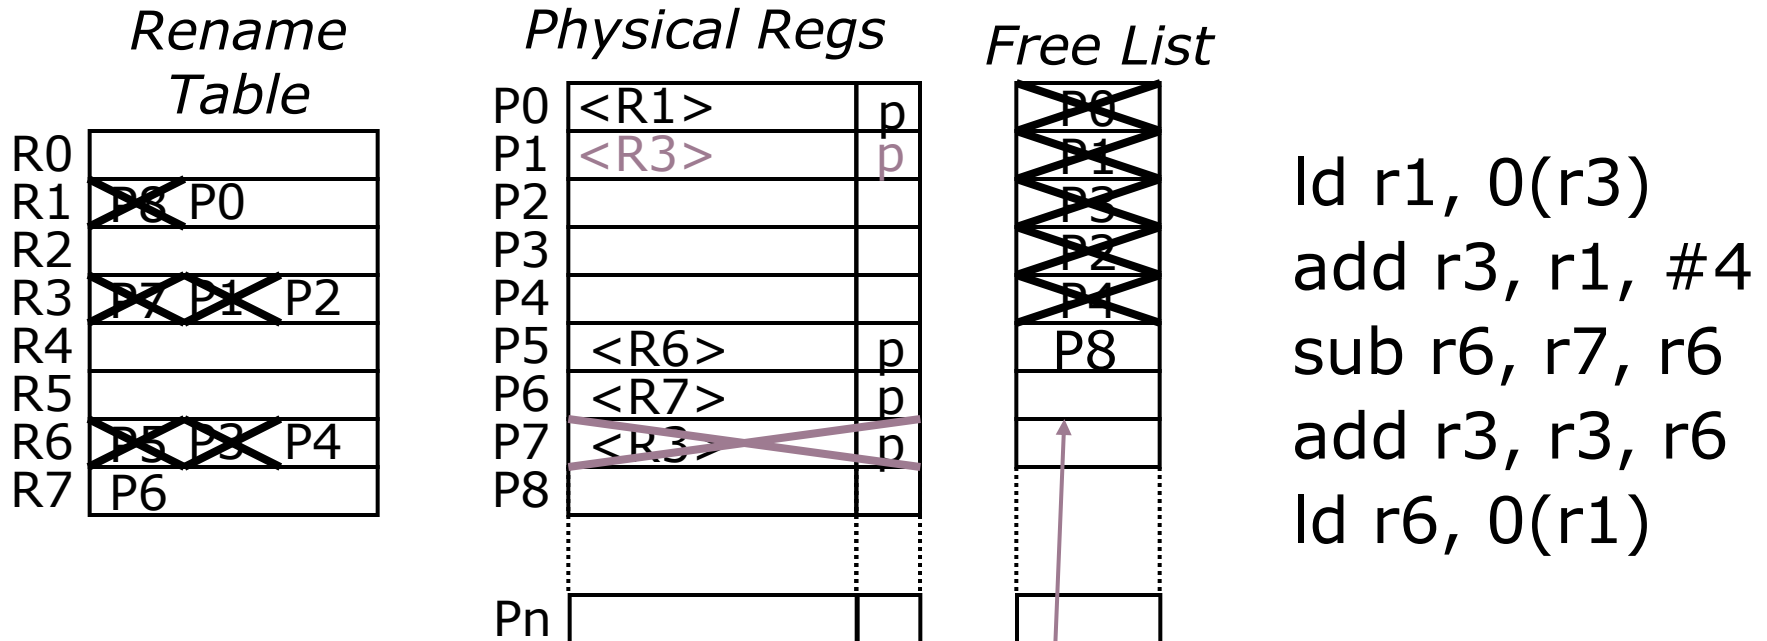


*ROB*

use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X	X	ld	p	P7			r1	P8	P0
X	X	add	p	P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add	p	P1		P3	r3	P1	P2
X		ld	p	P0			r6	P3	P4

Execute & Commit

# Physical Register Management

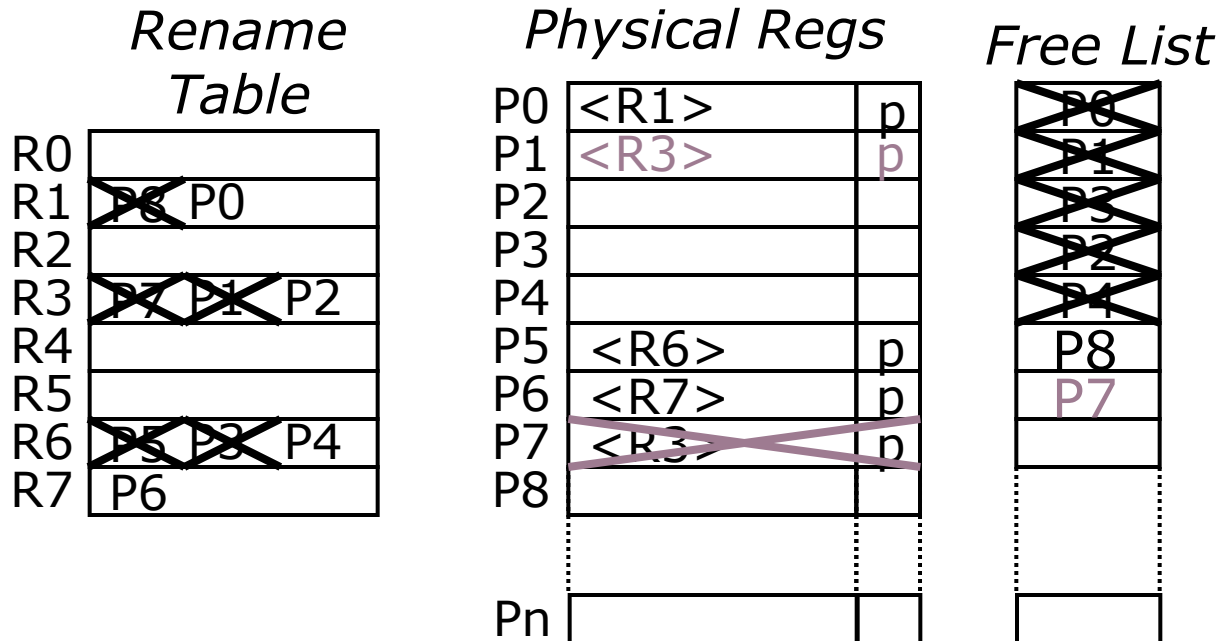

```
ld r1, 0(r3)
add r3, r1, #4
sub r6, r7, r6
add r3, r3, r6
ld r6, 0(r1)
```

*ROB*


use	ex	op	p1	PR1	p2	PR2	Rd	LPRd	PRd
X	X	ld	p	P7			r1	P8	P0
X	X	add	p	P0			r3	P7	P1
X		sub	p	P6	p	P5	r6	P5	P3
X		add	p	P1		P3	r3	P1	P2
X		ld	p	P0			r6	P3	P4

Execute & Commit



# Reorder Buffer Holds Active Instruction Window

---

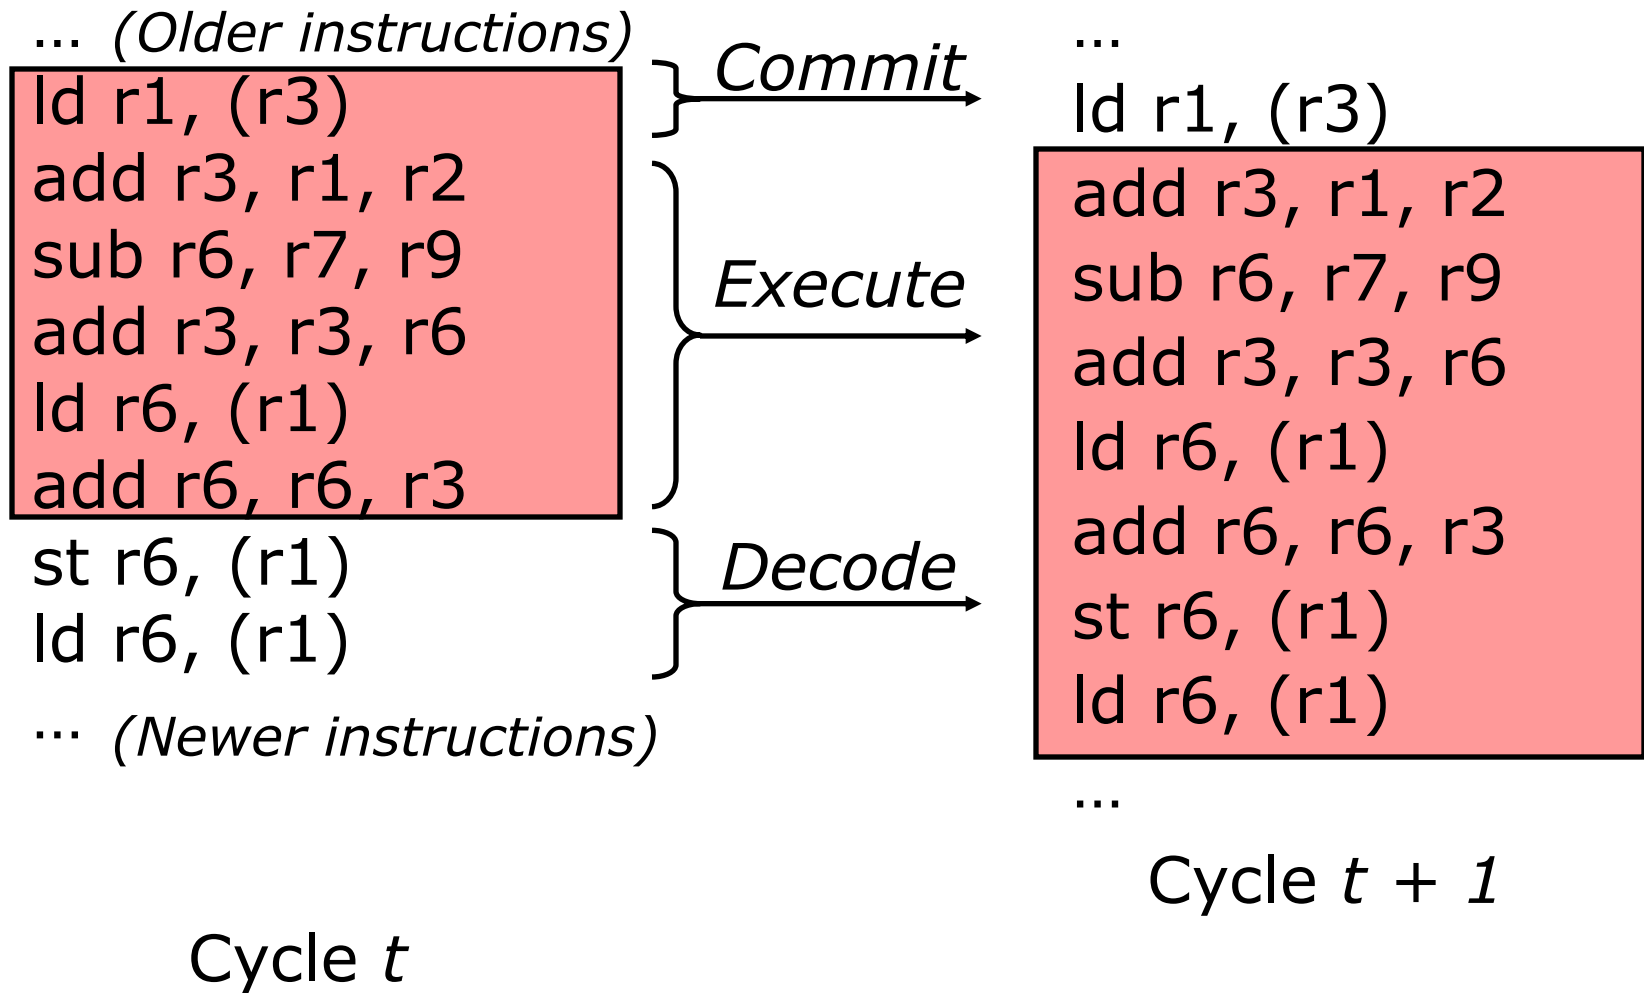

# Issue Timing

---

i1	Add R1,R1,#1	Issue <sub>1</sub>	Execute <sub>1</sub>		
i2	Sub R1,R1,#1			Issue <sub>2</sub>	Execute <sub>2</sub>

# Issue Timing

---

i1	Add R1,R1,#1	Issue <sub>1</sub>	Execute <sub>1</sub>		
i2	Sub R1,R1,#1			Issue <sub>2</sub>	Execute <sub>2</sub>

How can we issue earlier?

# Issue Timing

---

i1	Add R1,R1,#1	Issue <sub>1</sub>	Execute <sub>1</sub>		
i2	Sub R1,R1,#1			Issue <sub>2</sub>	Execute <sub>2</sub>

How can we issue earlier?

Using knowledge of execution latency (bypass)

# Issue Timing

---

i1	Add R1,R1,#1	Issue <sub>1</sub>	Execute <sub>1</sub>		
i2	Sub R1,R1,#1			Issue <sub>2</sub>	Execute <sub>2</sub>

How can we issue earlier?

Using knowledge of execution latency (bypass)

i1	LD R1, (R3)	Issue <sub>1</sub>	Execute <sub>1</sub>		
i2	Sub R1,R1,#1		Issue <sub>2</sub>	Execute <sub>2</sub>	

# Issue Timing

---

i1	Add R1,R1,#1	Issue <sub>1</sub>	Execute <sub>1</sub>		
i2	Sub R1,R1,#1			Issue <sub>2</sub>	Execute <sub>2</sub>

How can we issue earlier?

Using knowledge of execution latency (bypass)

i1	LD R1, (R3)	Issue <sub>1</sub>	Execute <sub>1</sub>		
i2	Sub R1,R1,#1		Issue <sub>2</sub>	Execute <sub>2</sub>	

What might make this schedule fail?

# Issue Timing

---

i1	Add R1,R1,#1	Issue <sub>1</sub>	Execute <sub>1</sub>		
i2	Sub R1,R1,#1			Issue <sub>2</sub>	Execute <sub>2</sub>

How can we issue earlier?


Using knowledge of execution latency (bypass)

i1	LD R1, (R3)	Issue <sub>1</sub>	Execute <sub>1</sub>		
i2	Sub R1,R1,#1		Issue <sub>2</sub>	Execute <sub>2</sub>	

What might make this schedule fail?

If execution latency wasn't as expected

# Issue Queue with latency prediction

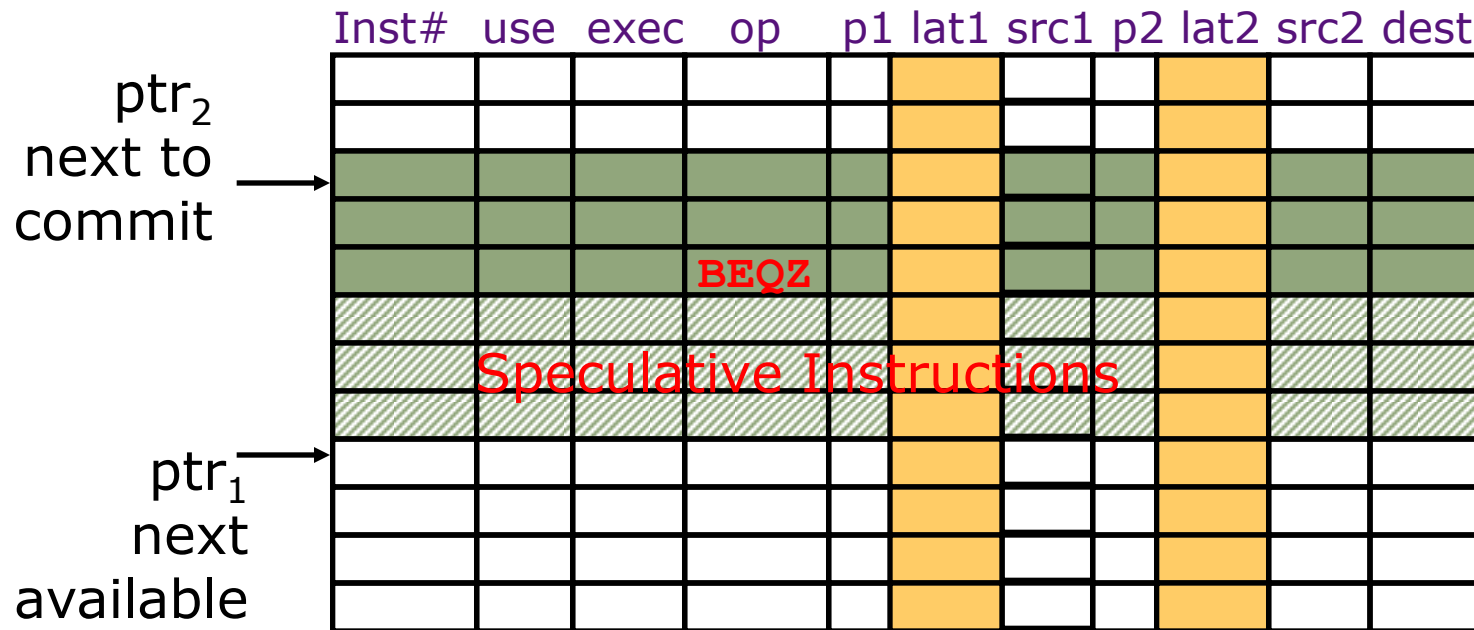


*Issue Queue (Reorder buffer)*






# Issue Queue with latency prediction

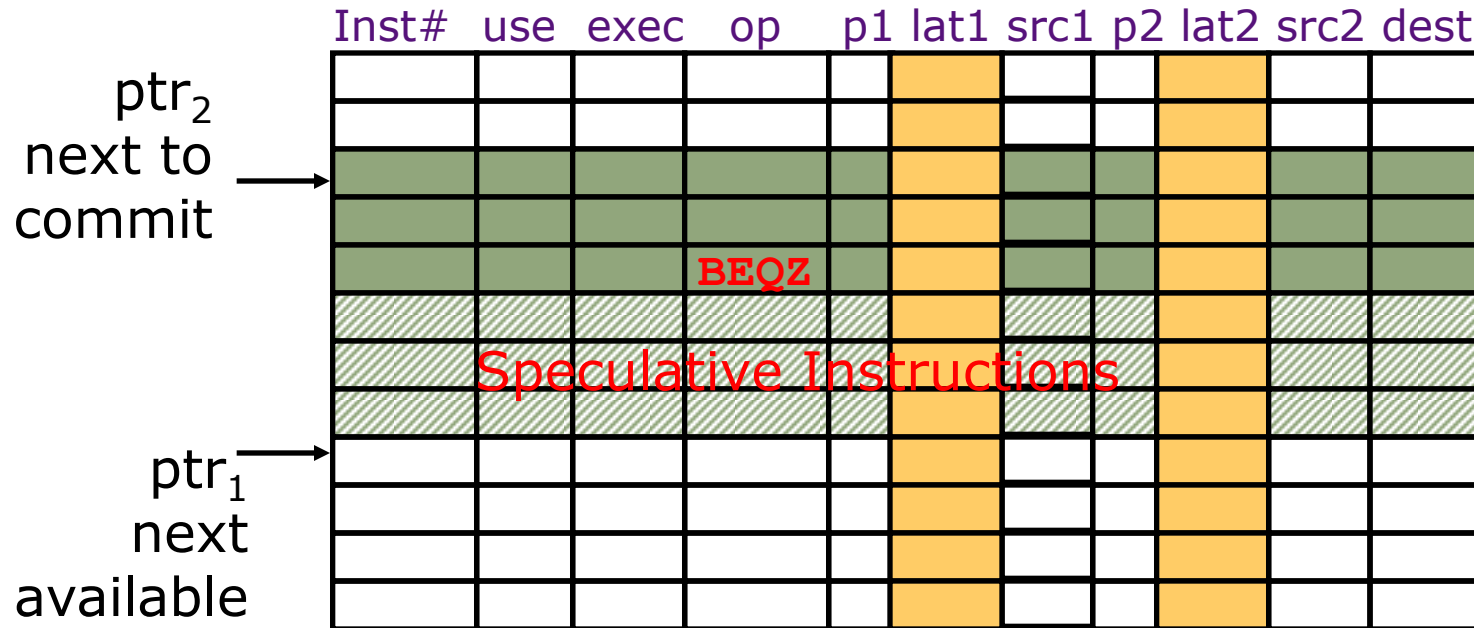

*Issue Queue (Reorder buffer)*

- Fixed latency: latency included in queue entry ('bypassed')


# Issue Queue with latency prediction

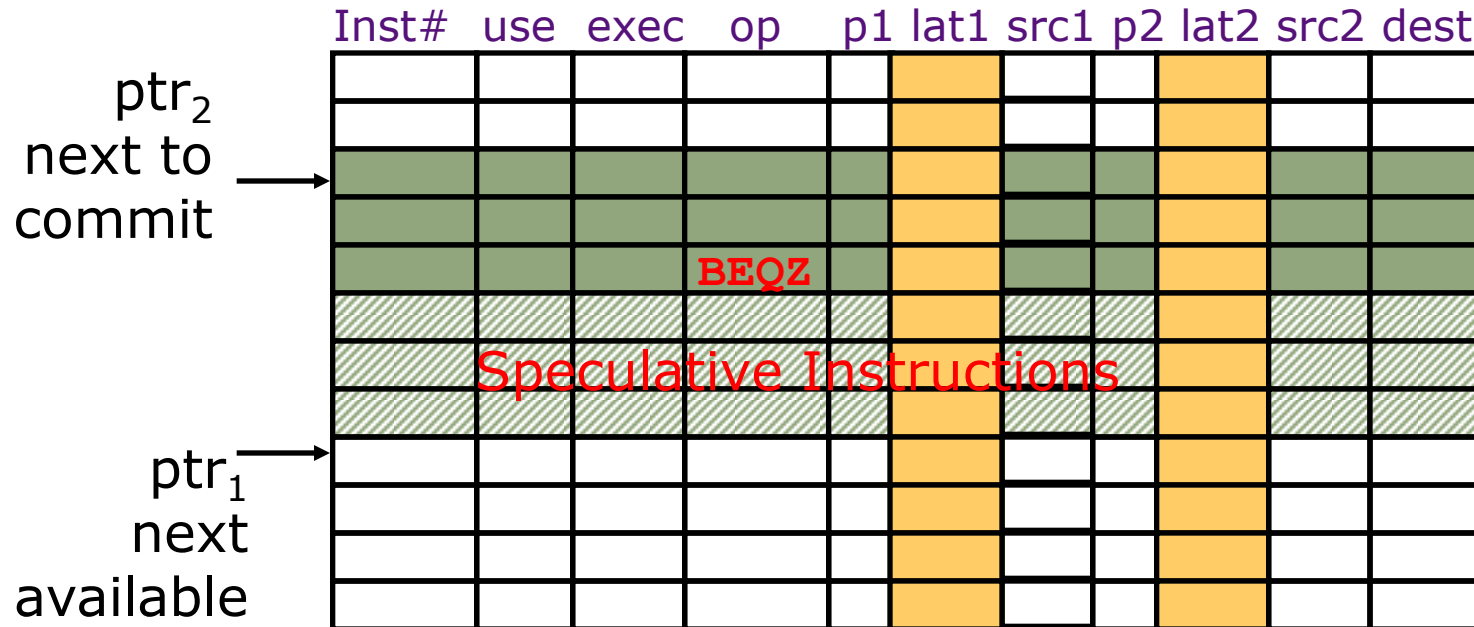

*Issue Queue (Reorder buffer)*

- Fixed latency: latency included in queue entry ('bypassed')
- Predicted latency: latency included in queue entry (speculated)

# Issue Queue with latency prediction

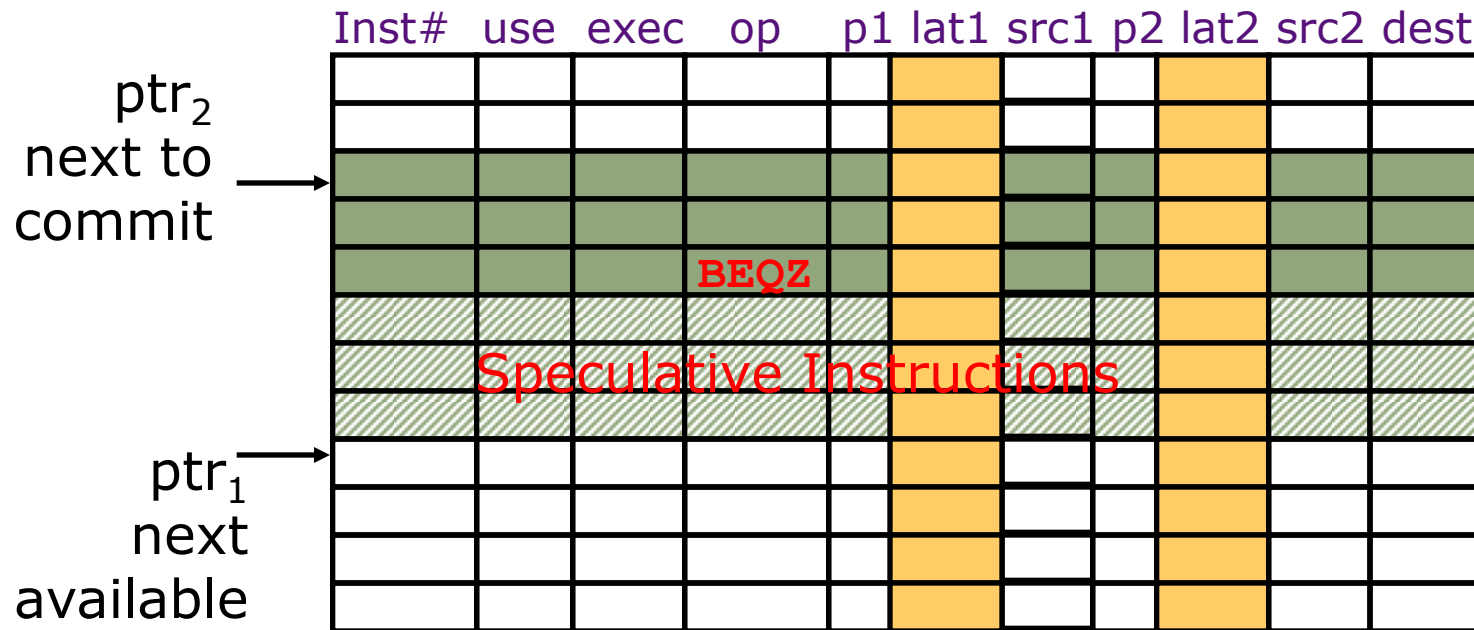


*Issue Queue (Reorder buffer)*

- Fixed latency: latency included in queue entry ('bypassed')
- Predicted latency: latency included in queue entry (speculated)
- Variable latency: wait for completion signal (stall)


# Data-in-ROB vs. Single Register File

---

Data-in-ROB style

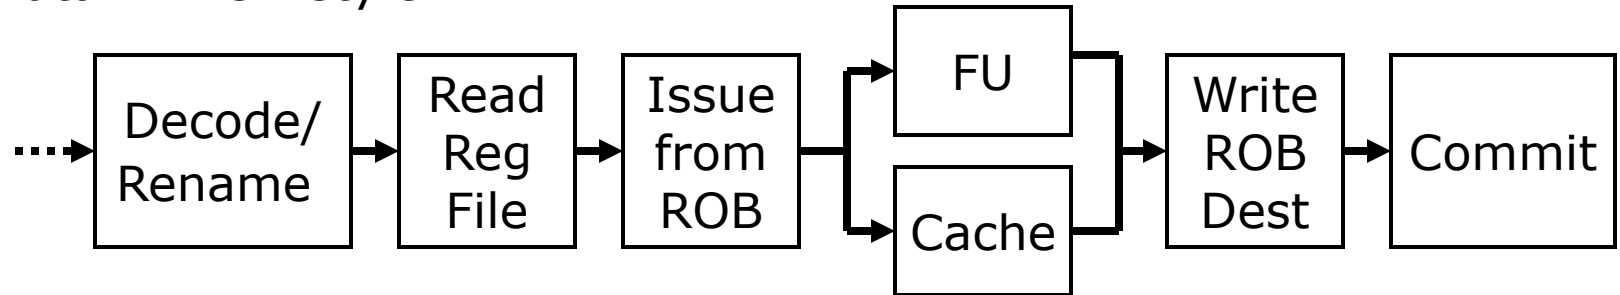

Single-register-file style

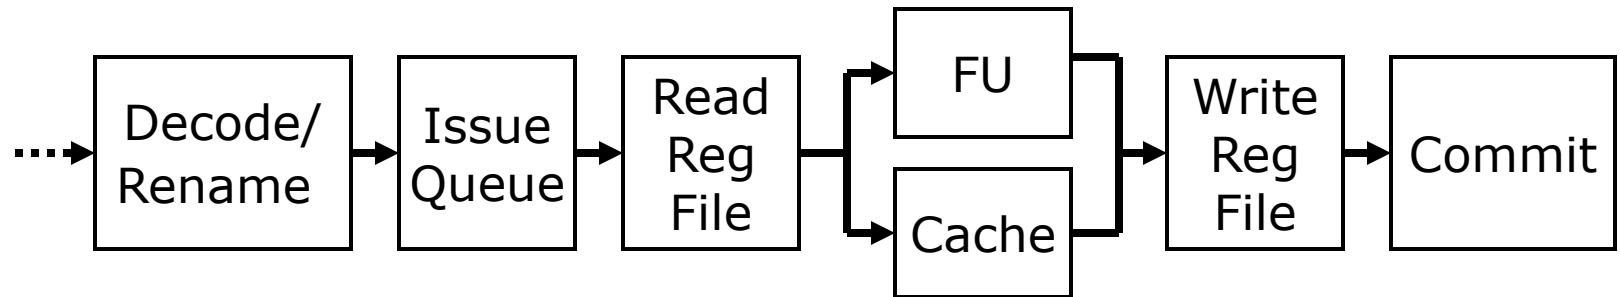


How does issue speculation differ, e.g., on cache miss?


# Data-in-ROB vs. Single Register File

---

Data-in-ROB style

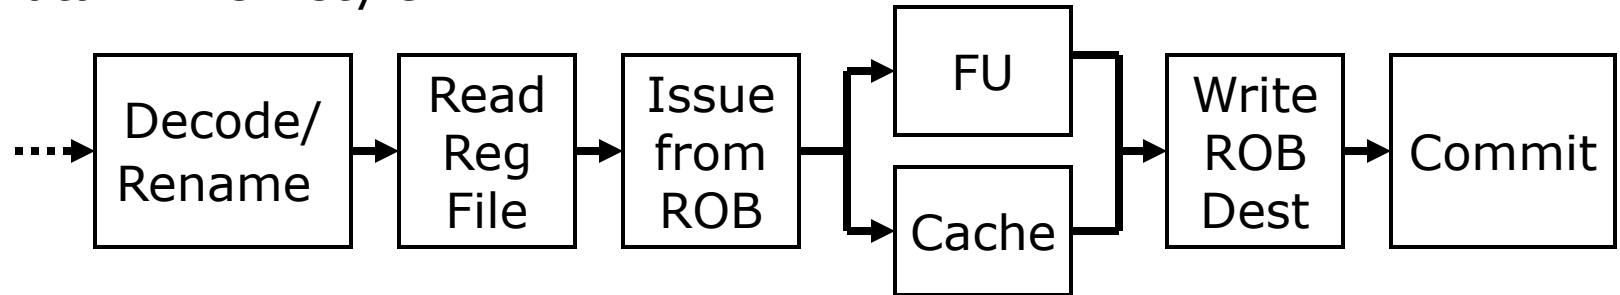

Single-register-file style

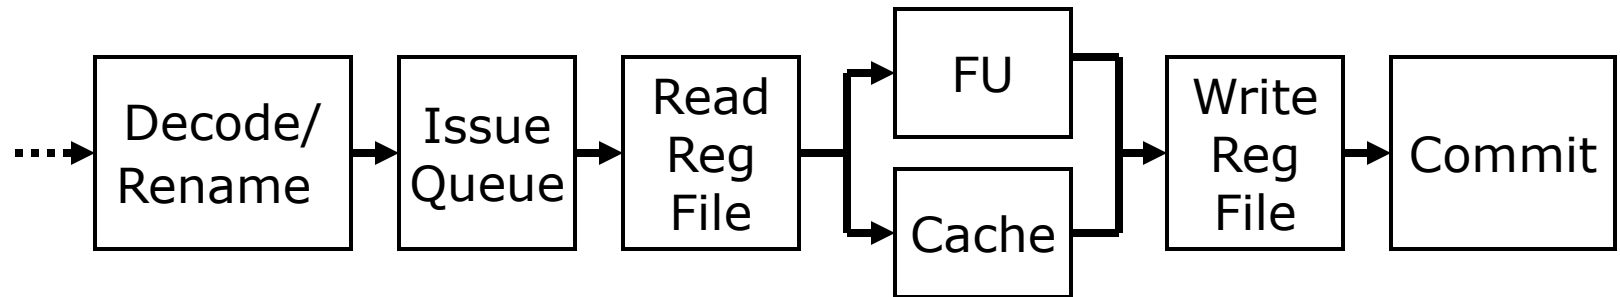


How does issue speculation differ, e.g., on cache miss?

**Dependency loop shorter for data-in-ROB style**


# Superscalar Register Renaming

- During decode, instructions allocated new physical destination register
- Source operands renamed to physical register with newest value
- Execution unit only sees physical register numbers

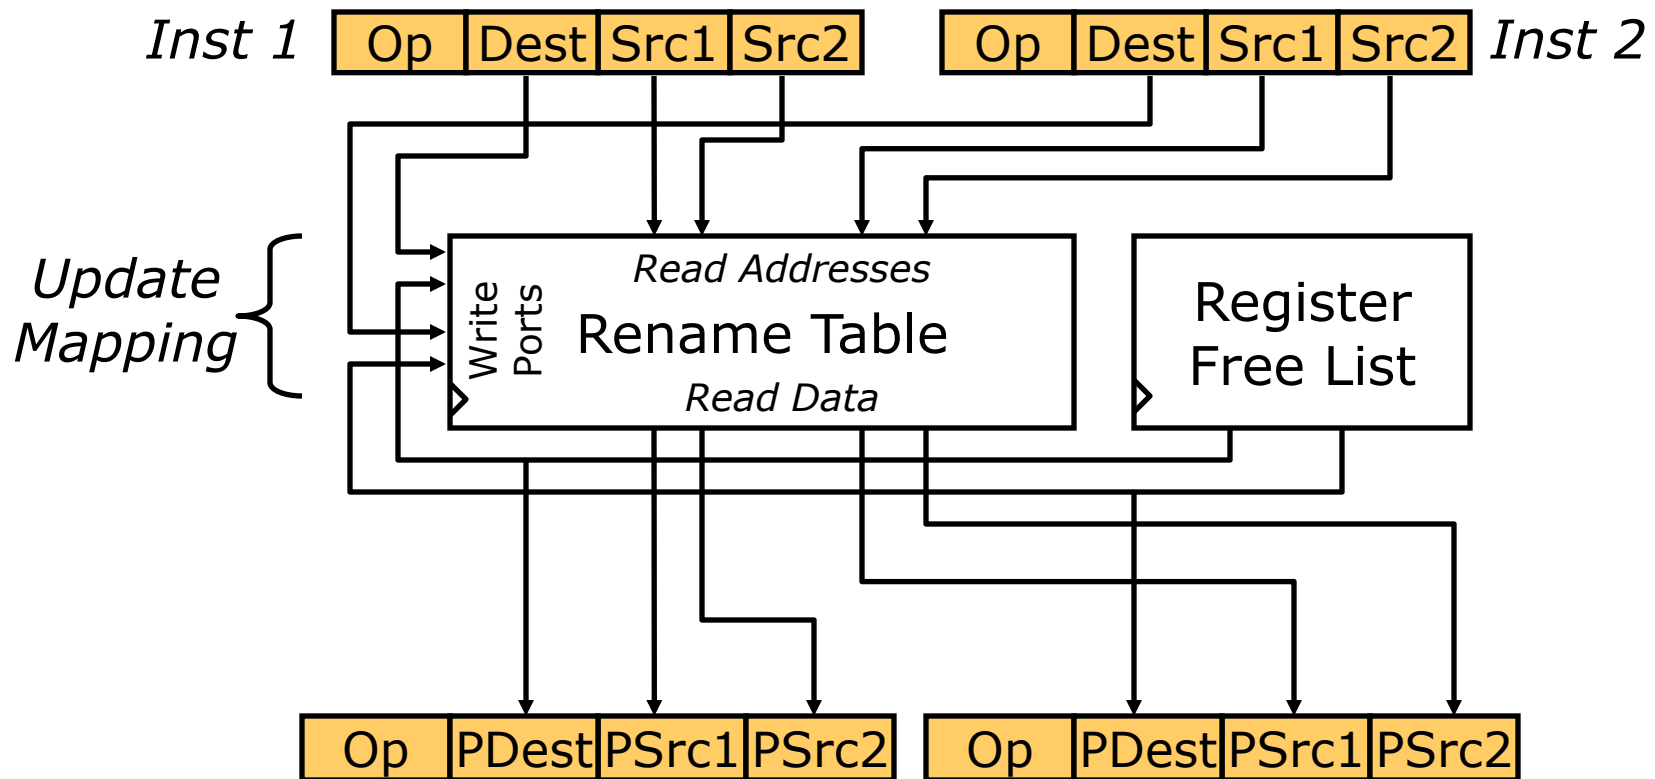


# Superscalar Register Renaming

- During decode, instructions allocated new physical destination register
- Source operands renamed to physical register with newest value
- Execution unit only sees physical register numbers

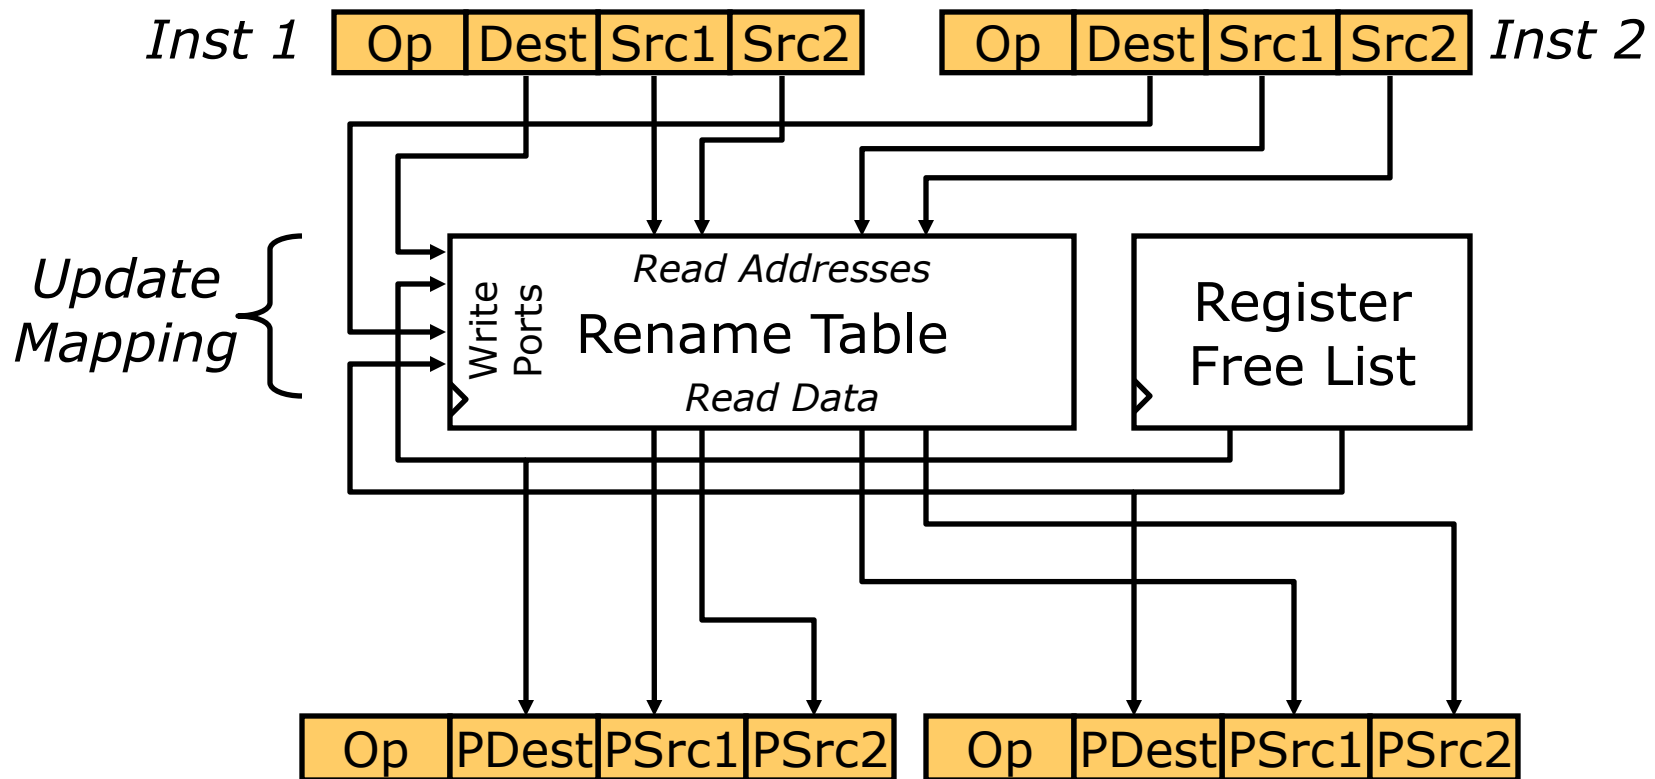

Does this work?

# Superscalar Register Renaming

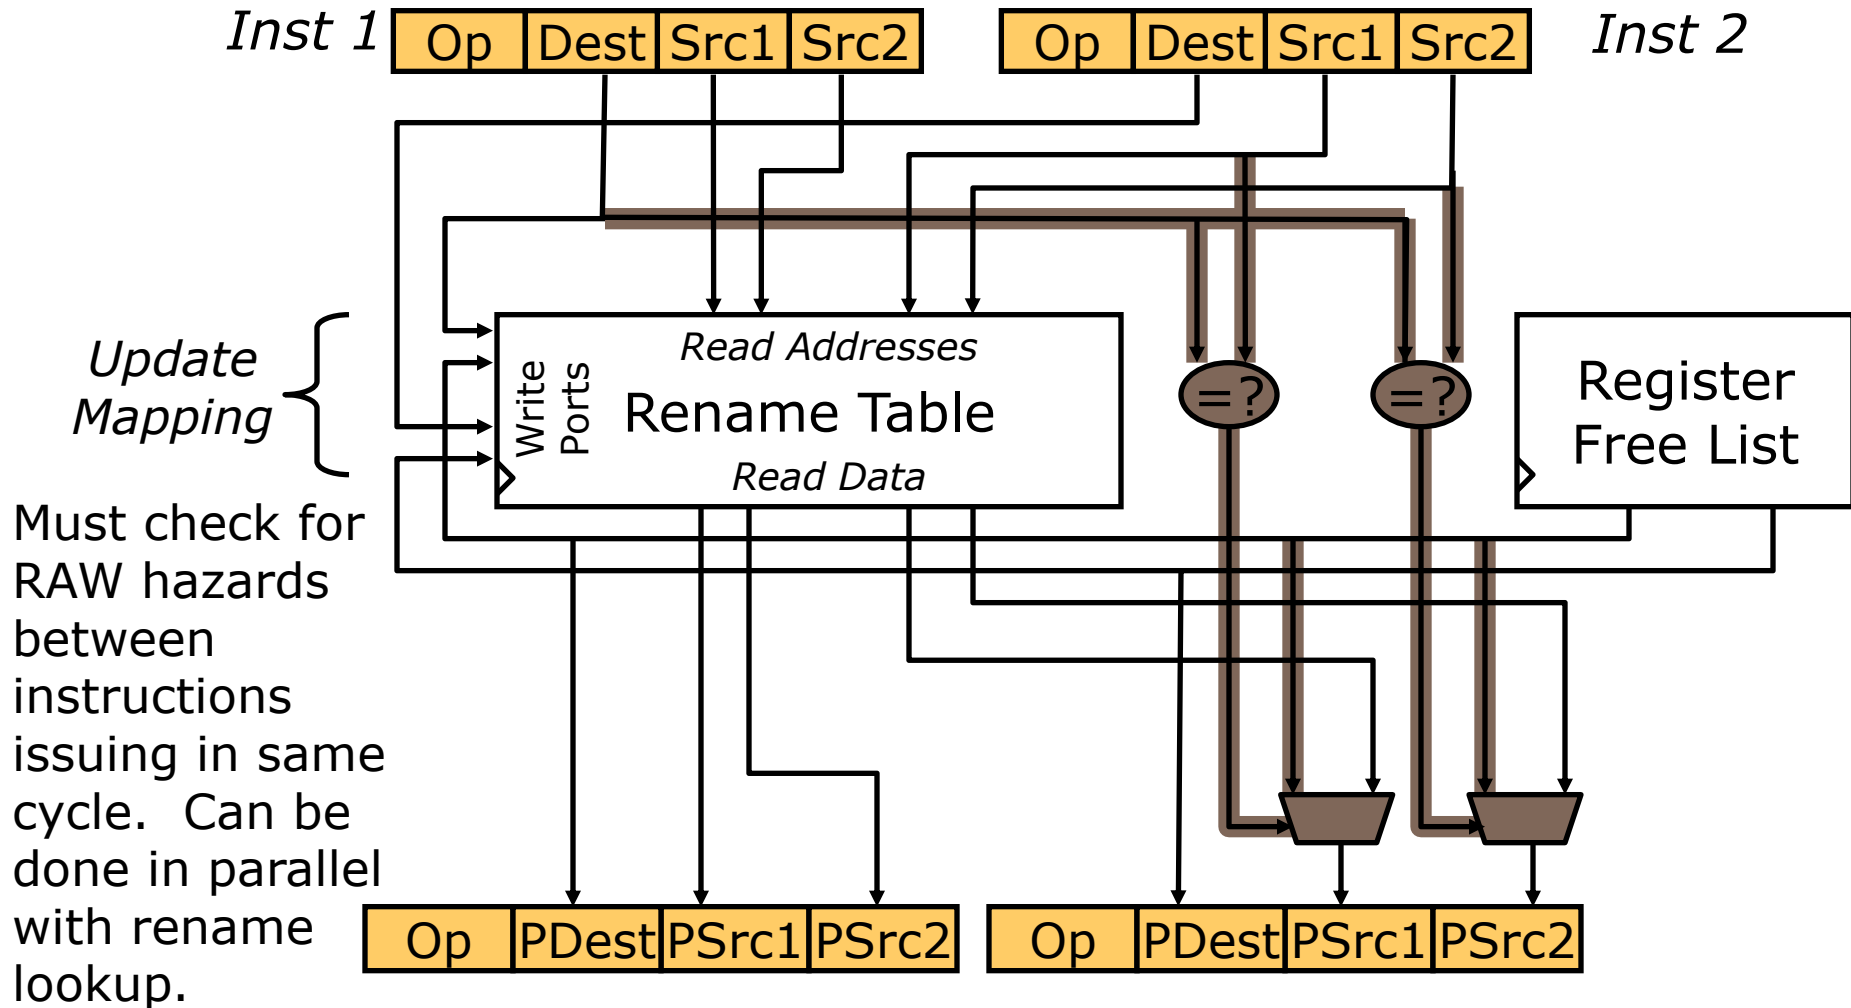

*MIPS R10K renames 4 serially-RAW-dependent insts/cycle)*



# Split Issue and Commit Queues

---

- How large should the ROB be?
  - Think Little's Law...

# Split Issue and Commit Queues

---

- How large should the ROB be?
  - Think Little's Law...
- Can split ROB into issue and commit queues

# Split Issue and Commit Queues

---

- How large should the ROB be?
  - Think Little's Law...
- Can split ROB into issue and commit queues

*Issue Queue*

use	op	p1	PR1	p2	PR2

*Commit Queue*

ex	Rd	LPRd	PRd

# Split Issue and Commit Queues

---

- How large should the ROB be?
  - Think Little's Law...
- Can split ROB into issue and commit queues

*Issue Queue*

use	op	p1	PR1	p2	PR2

*Commit Queue*

ex	Rd	LPRd	PRd

- Commit queue: Allocate on decode, free on commit
- Issue queue: Allocate on decode, free on dispatch

# Split Issue and Commit Queues

---

- How large should the ROB be?
  - Think Little's Law...
- Can split ROB into issue and commit queues

*Issue Queue*

use	op	p1	PR1	p2	PR2	tag

*Commit Queue*

ex	Rd	LPRd	PRd

- Commit queue: Allocate on decode, free on commit
- Issue queue: Allocate on decode, free on dispatch

# Split Issue and Commit Queues

---

- How large should the ROB be?
  - Think Little's Law...
- Can split ROB into issue and commit queues

*Issue Queue*

use	op	p1	PR1	p2	PR2	tag

*Commit Queue*

ex	Rd	LPRd	PRd

- Commit queue: Allocate on decode, free on commit
- Issue queue: Allocate on decode, free on dispatch
- Pros: Smaller issue queue → simpler dispatch logic

# Split Issue and Commit Queues

---

- How large should the ROB be?
  - Think Little's Law...
- Can split ROB into issue and commit queues

*Issue Queue*

use	op	p1	PR1	p2	PR2	tag

*Commit Queue*

ex	Rd	LPRd	PRd

- Commit queue: Allocate on decode, free on commit
- Issue queue: Allocate on decode, free on dispatch
- Pros: Smaller issue queue → simpler dispatch logic
- Cons: More complex mis-speculation recovery

# Speculating Both Directions

---

An alternative to branch prediction is to execute both directions of a branch *speculatively*



# Speculating Both Directions

---

An alternative to branch prediction is to execute both directions of a branch *speculatively*

- resource requirement is proportional to the number of concurrent speculative executions

# Speculating Both Directions

---

An alternative to branch prediction is to execute both directions of a branch *speculatively*

- resource requirement is proportional to the number of concurrent speculative executions
- only half the resources engage in useful work when both directions of a branch are executed speculatively

# Speculating Both Directions

---

An alternative to branch prediction is to execute both directions of a branch *speculatively*

- resource requirement is proportional to the number of concurrent speculative executions
- only half the resources engage in useful work when both directions of a branch are executed speculatively
- branch prediction takes less resources than speculative execution of both paths

# Speculating Both Directions

---

An alternative to branch prediction is to execute both directions of a branch *speculatively*

- resource requirement is proportional to the number of concurrent speculative executions
- only half the resources engage in useful work when both directions of a branch are executed speculatively
- branch prediction takes less resources than speculative execution of both paths

*With accurate branch prediction, it is more cost effective to dedicate all resources to the predicted direction*



*Thank you !*